

SURFACE PROTECT./OBERFL. SCHUTZ	
I	JED-240-3
II	JED-256-1
III	JED-371
IV	JED-240-2

Ⓕ

14 f8 -0.016
-0.043

THEORETICAL SWIVEL POINT OF THE PUSH ROD
THEOR. SCHWENKPUNKT DER DRUCKSTANGE
CENTRE D'ARTICULATION THEORIQUE DE LA TIGE
CENTRO D'ARTICOLAZIONE TEORICO DELL'ASTA

OPEN BREATHER HOLES
OFFEN ATMUNGSBOHRUNG 4xØ 6
OUVERT TROU RENIFLEUR
APERTO FORO RESPIRATORE

TORQUE
ANZUGSMOMENT
COUPLE DE SERRAGE
COPPIA DI SERRAGGIO:

Ⓕ
70 ±10 Nm
70 +16
0 Nm

STROKE :
HUB : 75 mm
COURSE :
CORSO :

EXTERNAL STROKE LIMIT
HUBBEGRENZUNG EXTERN
LIMITE DE COURSE EXTERNE
LIMITAZIONE DI CORSA ESTERNO

THERMAL RANGE OF APPLICATION :
THERMISCHER ANWENDUNGSBEREICH : -40° C..+80° C
GAMME D'APPLICATION THERMIQUE :
CAMPO DI APPLICAZIONE TERMICA :


SERVICE PRESSURE :
BETRIEBSDRUCK : pe = max. 8.5bar
PRESSION DE SERVICE :
PRESSIONE D'ESERCIZIO :

MEDIUM : AIR
MEDIUM : LUFT
FLUIDE : AIR
FLUIDO : ARIA

Ⓕ
ADMISSIBLE INSTALLATION POSITION
ZULAESSIGE EINBAULAGE
POSITION D'INSTALLATION ADMISE
POSIZIONE DI MONTAGGIO AMMESSA

*) BY-PACKING : A 423 902 533 2 ON SPECIAL ORDER ONLY
BEIPACK : A 423 902 533 2 NUR AUF BESTELLUNG
PAQUET JOINT : B 423 902 534 2 SUR COMMANDE SEULEMENT
PACKO RIUNCHIUSO: B 423 902 534 2 SU ORDINAZIONE SOLAMENTE

GENERAL SPECIFICATION: JED-334		FURTHER TECHNICAL DATA:		CADAM-DRAWING COPYRIGHT		DATE SIGNATURE		DRAWING		00-05-25 Ghafari		CHECKED:		00-05-25 Mueller		STANDARDIZATION:		PRODUCT IDENTIFICATION NO.		MASS SCALE		2.5 1:1		DOC. CODE		SHEET	
DOC. CODE:		SHEET: TO		GENERAL TOLERANCES		CLASS 1)		RANGE OF NOMINAL DIMENSIONS (± mm)		088490 8xF 04-01-05		087198 1xE 03-10-15		077632 2xD 00-11-14		075390 C 00-05-25		TAPPED HOLES ACC: ISO 4039 / JED-152		DCN-NO. REV. DATE		A 1 037F		SHAPE CODE		REPLACEMENT FOR	
FINE		0.5		1.0		1.5		2.0		± 3°		± 3°		± 3°		± 3°		TAPED HOLES ACC: ISO 4039 / JED-152		1) TOLERANCE CLASS APPLIED CROSSMARKED		EXPERT CODE		8 1 5 Ⓕ		PRODUCT TYPE	
MEDIUM		1.0		2.0		3.0		4.0		5.0		6.0		7.0		8.0		9.0		10.0		11.0		12.0		13.0	
COARSE		2.0		3.0		4.0		5.0		6.0		7.0		8.0		9.0		10.0		11.0		12.0		13.0		14.0	

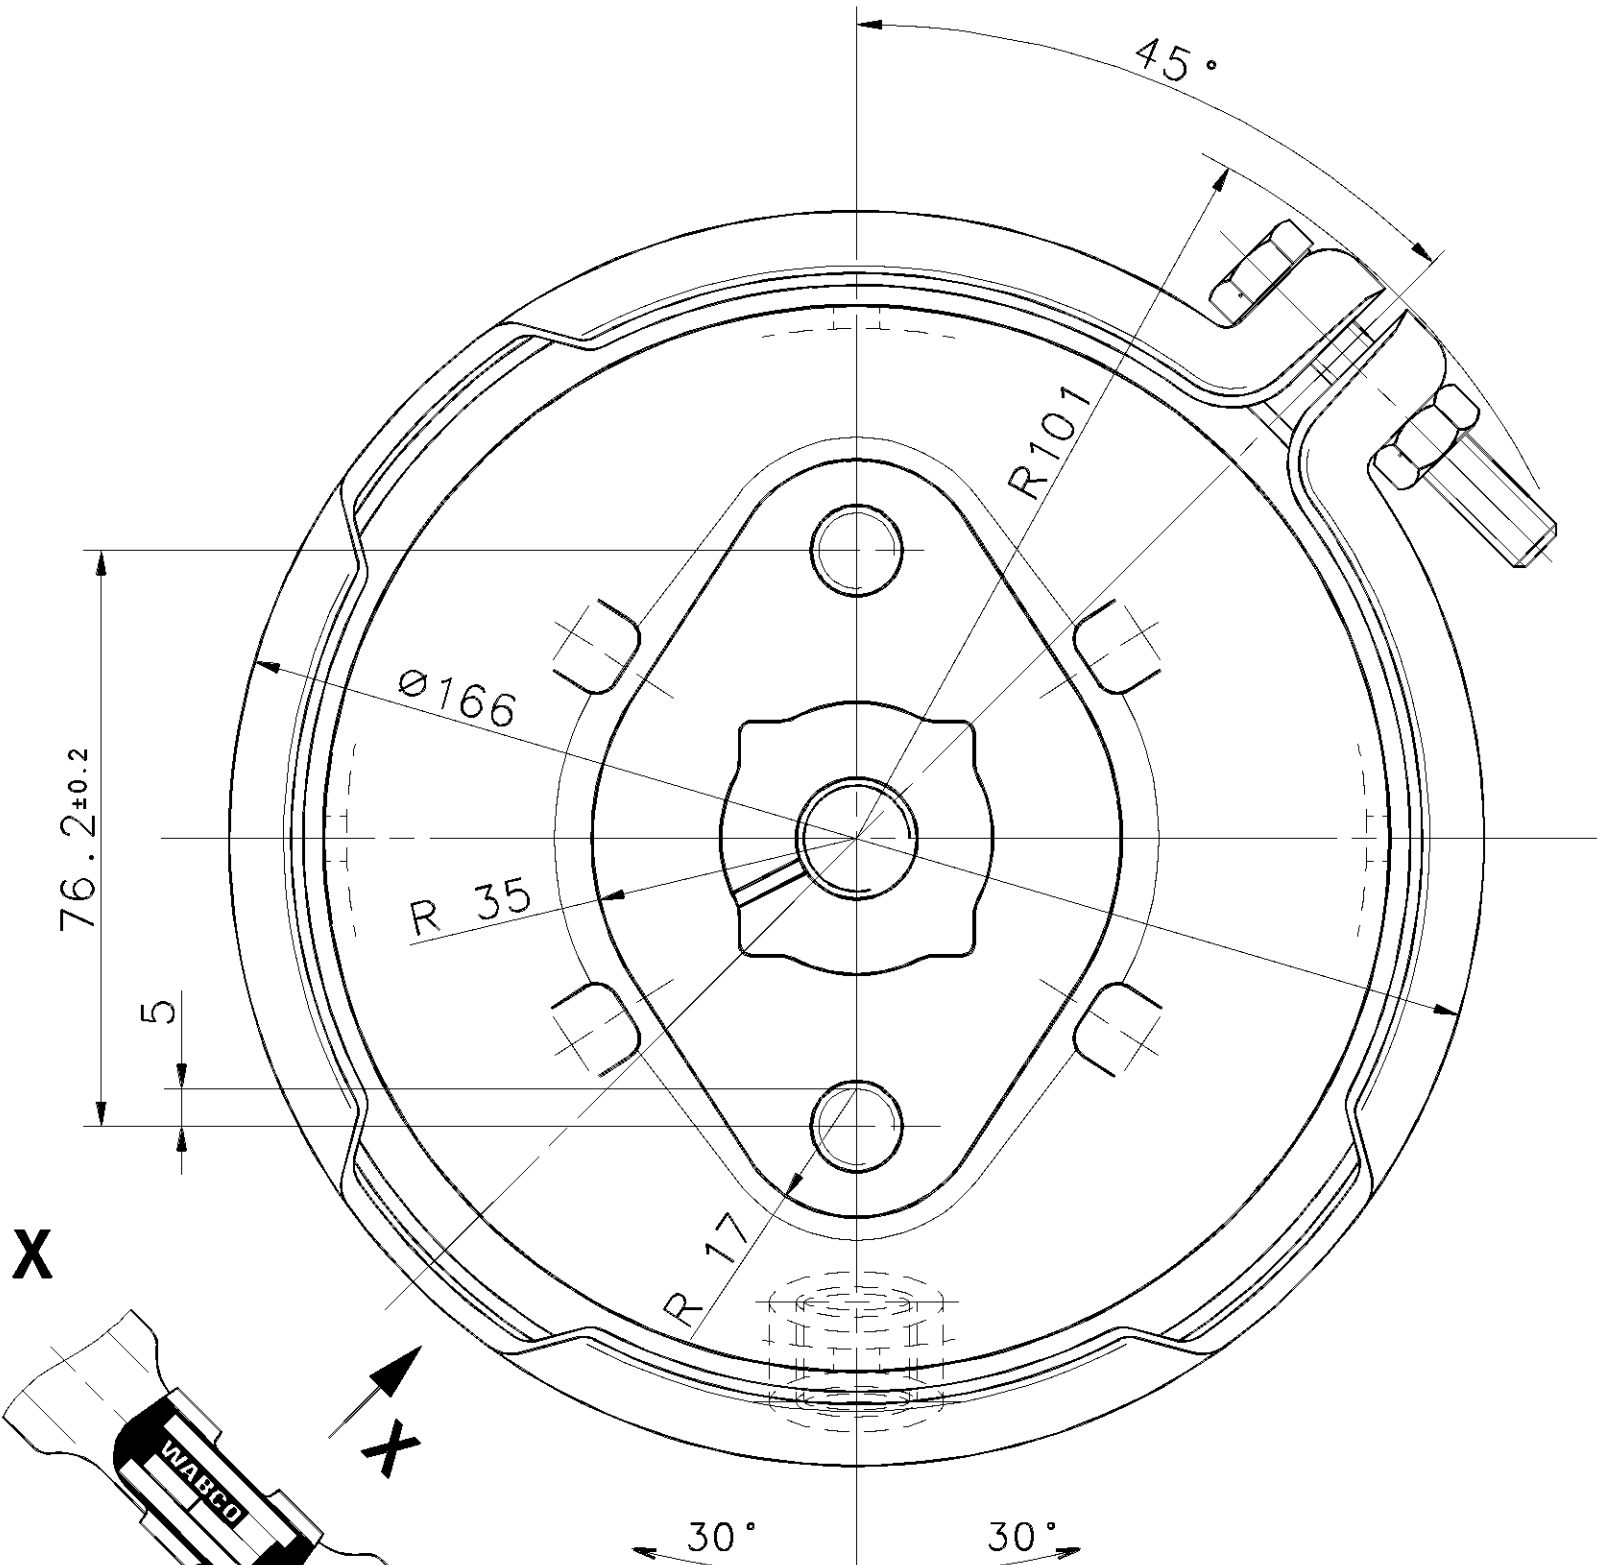

TO BE INSTALLED WITH LOWER BREATHER HOLE OPEN
IM EINBAUZUSTAND UNTERE ATMUNGSBOHRUNG GEOEFFNET
A MONTER AVEC LE RENIFLARD INFERIEUR OUVERT
INSTALLAZIONE : CON IL FORO DI SFIATO INFERIORE APERTO

