




ELEMENTS

12V

24V

Wet

EFB

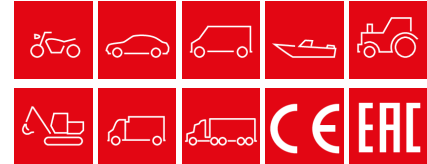

- Battery charger and starter: WET, EFB 12/24V battery charger and rapid ignition of all types of vehicles, vans, etc. (570A max).
- Normal charge, boost, rapid ignition selection.
- Display of charging and ignition current.
- Protection against overcharging and pole inversion.

TECHNICAL DATA

CODE	829492	CHARGE AND STARTING VOLTAG.	12 / 24 V	MIN.RATED REFERENCE CAPAC.	20 Ah
SINGLEPHASE MAINS VOLTAGE	230 V	EFFECTIVE CHARGING CURRENT	105 A	MAX.RATED REFERENCE CAPAC.	1550 Ah
MAINS FREQUENCY	50 / 60 Hz	RATED CHAR.CUR.EN60335-2-29	70 A	ADJUSTMENT POSITIONS	4
CHARGING ABSORBED POWER	2,2 kW	START CUR.1V/C EN60335-2-29	360 A	DIMENSIONS (LxWxH)	26,1x39,5x80,8cm
STARTING ABSORBED POWER	12 kW	MAX STARTING CURRENT	570 A	WEIGHT	22,2 kg

ON REQUEST ACCESSORIES

BATTERY CHARGERS FUSES	
802029	FUSES 100A 20 PCS

DESCRIPTION

Battery charger and starter for charging WET/EFB batteries with 12V/24V voltage and starting all kinds of cars, vans and light trucks.

Features:

- Choice of normal charge, quick charge (BOOST), quick start;
- Display of charging and starting current;
- Protection against overloads and polarity reversal.

Equipped with cables with clamps.

DOWNLOAD



CATALOG IMAGE



INSTRUCTION MANUAL



SPARE PARTS LIST