

## Product information

# 92 38 75 ESD

## Universal Tweezers ESD

DIN EN 61340 -5-1



- Electrically dissipative coating: Universal tweezers in the ESD version equalize differences in electrical potential between their user and the workpieces in a controlled manner
- ESD-tested, black epoxy resin coating with a surface resistance between  $10^3$  and  $10^9$  ohms
- For the electronics and precision engineering industries
- Antimagnetic to avoid electromagnetic damage
- Wide range of designs: straight, angled, gripping surfaces and handles smooth or serrated, with needle points, narrow or blunt tips
- The high quality stainless steel ensures extreme toughness and very good corrosion resistance against a variety of atmospheric environments and many corrosive materials
- Also available as a set (92 00 01 ESD)
- Stainless steel


### General

|                   |                          |
|-------------------|--------------------------|
| Article No.       | 92 38 75 ESD             |
| Reference number  | 7.SA.NE.B                |
| EAN               | 4003773054863            |
| Material          | stainless steel          |
| Gripping surfaces | smooth gripping surfaces |
| Weight            | 15 g                     |
| Dimensions        | 118 x 10 x 12 mm         |
| Standard          | DIN EN 61340 -5-1        |
| REACH compliant   | does not contain SVHC    |
| RoHS compliant    | not applicable           |

### Technical details

|                      |                          |
|----------------------|--------------------------|
| Surface              | matt finish              |
| Tips width (A)       | 0.25 mm                  |
| Tips width (B)       | 0.3 mm                   |
| Tweezers tip version | needle-point             |
| Corrosion-resistant  | yes                      |
| Acid resistance      | very good                |
| ESD-tested           | yes                      |
| VDE tested           | no                       |
| Sectors              | electronics              |
| Magnetic             | non-magnetisable (80%)   |
| Behaviour            | electrically dissipative |

## Technical details

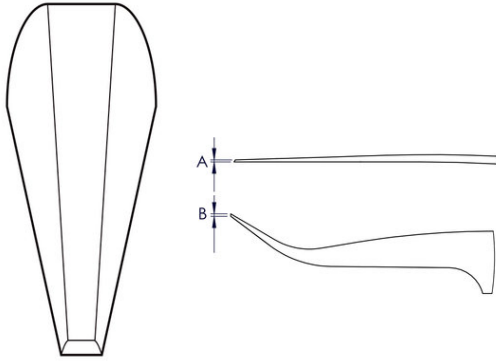

*technical change and errors excepted*