
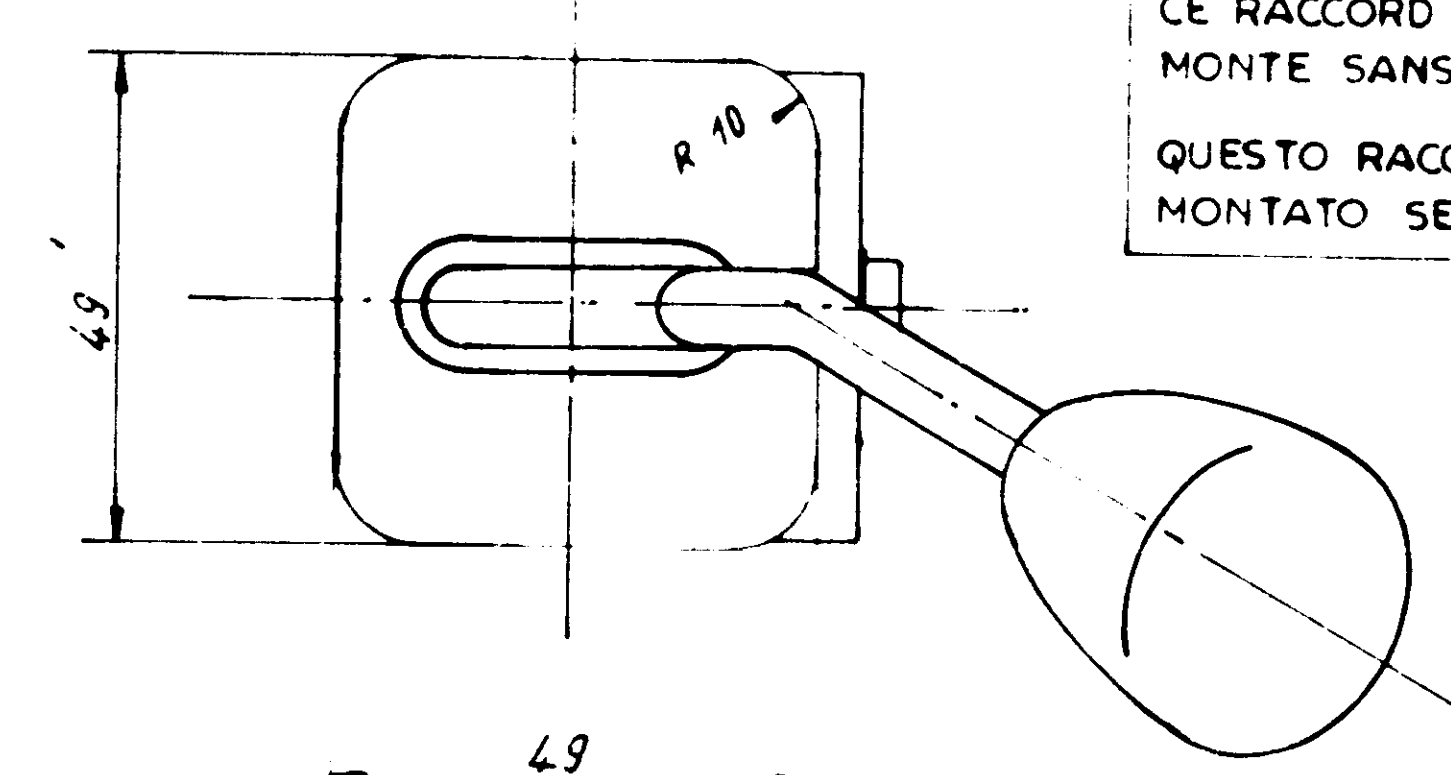
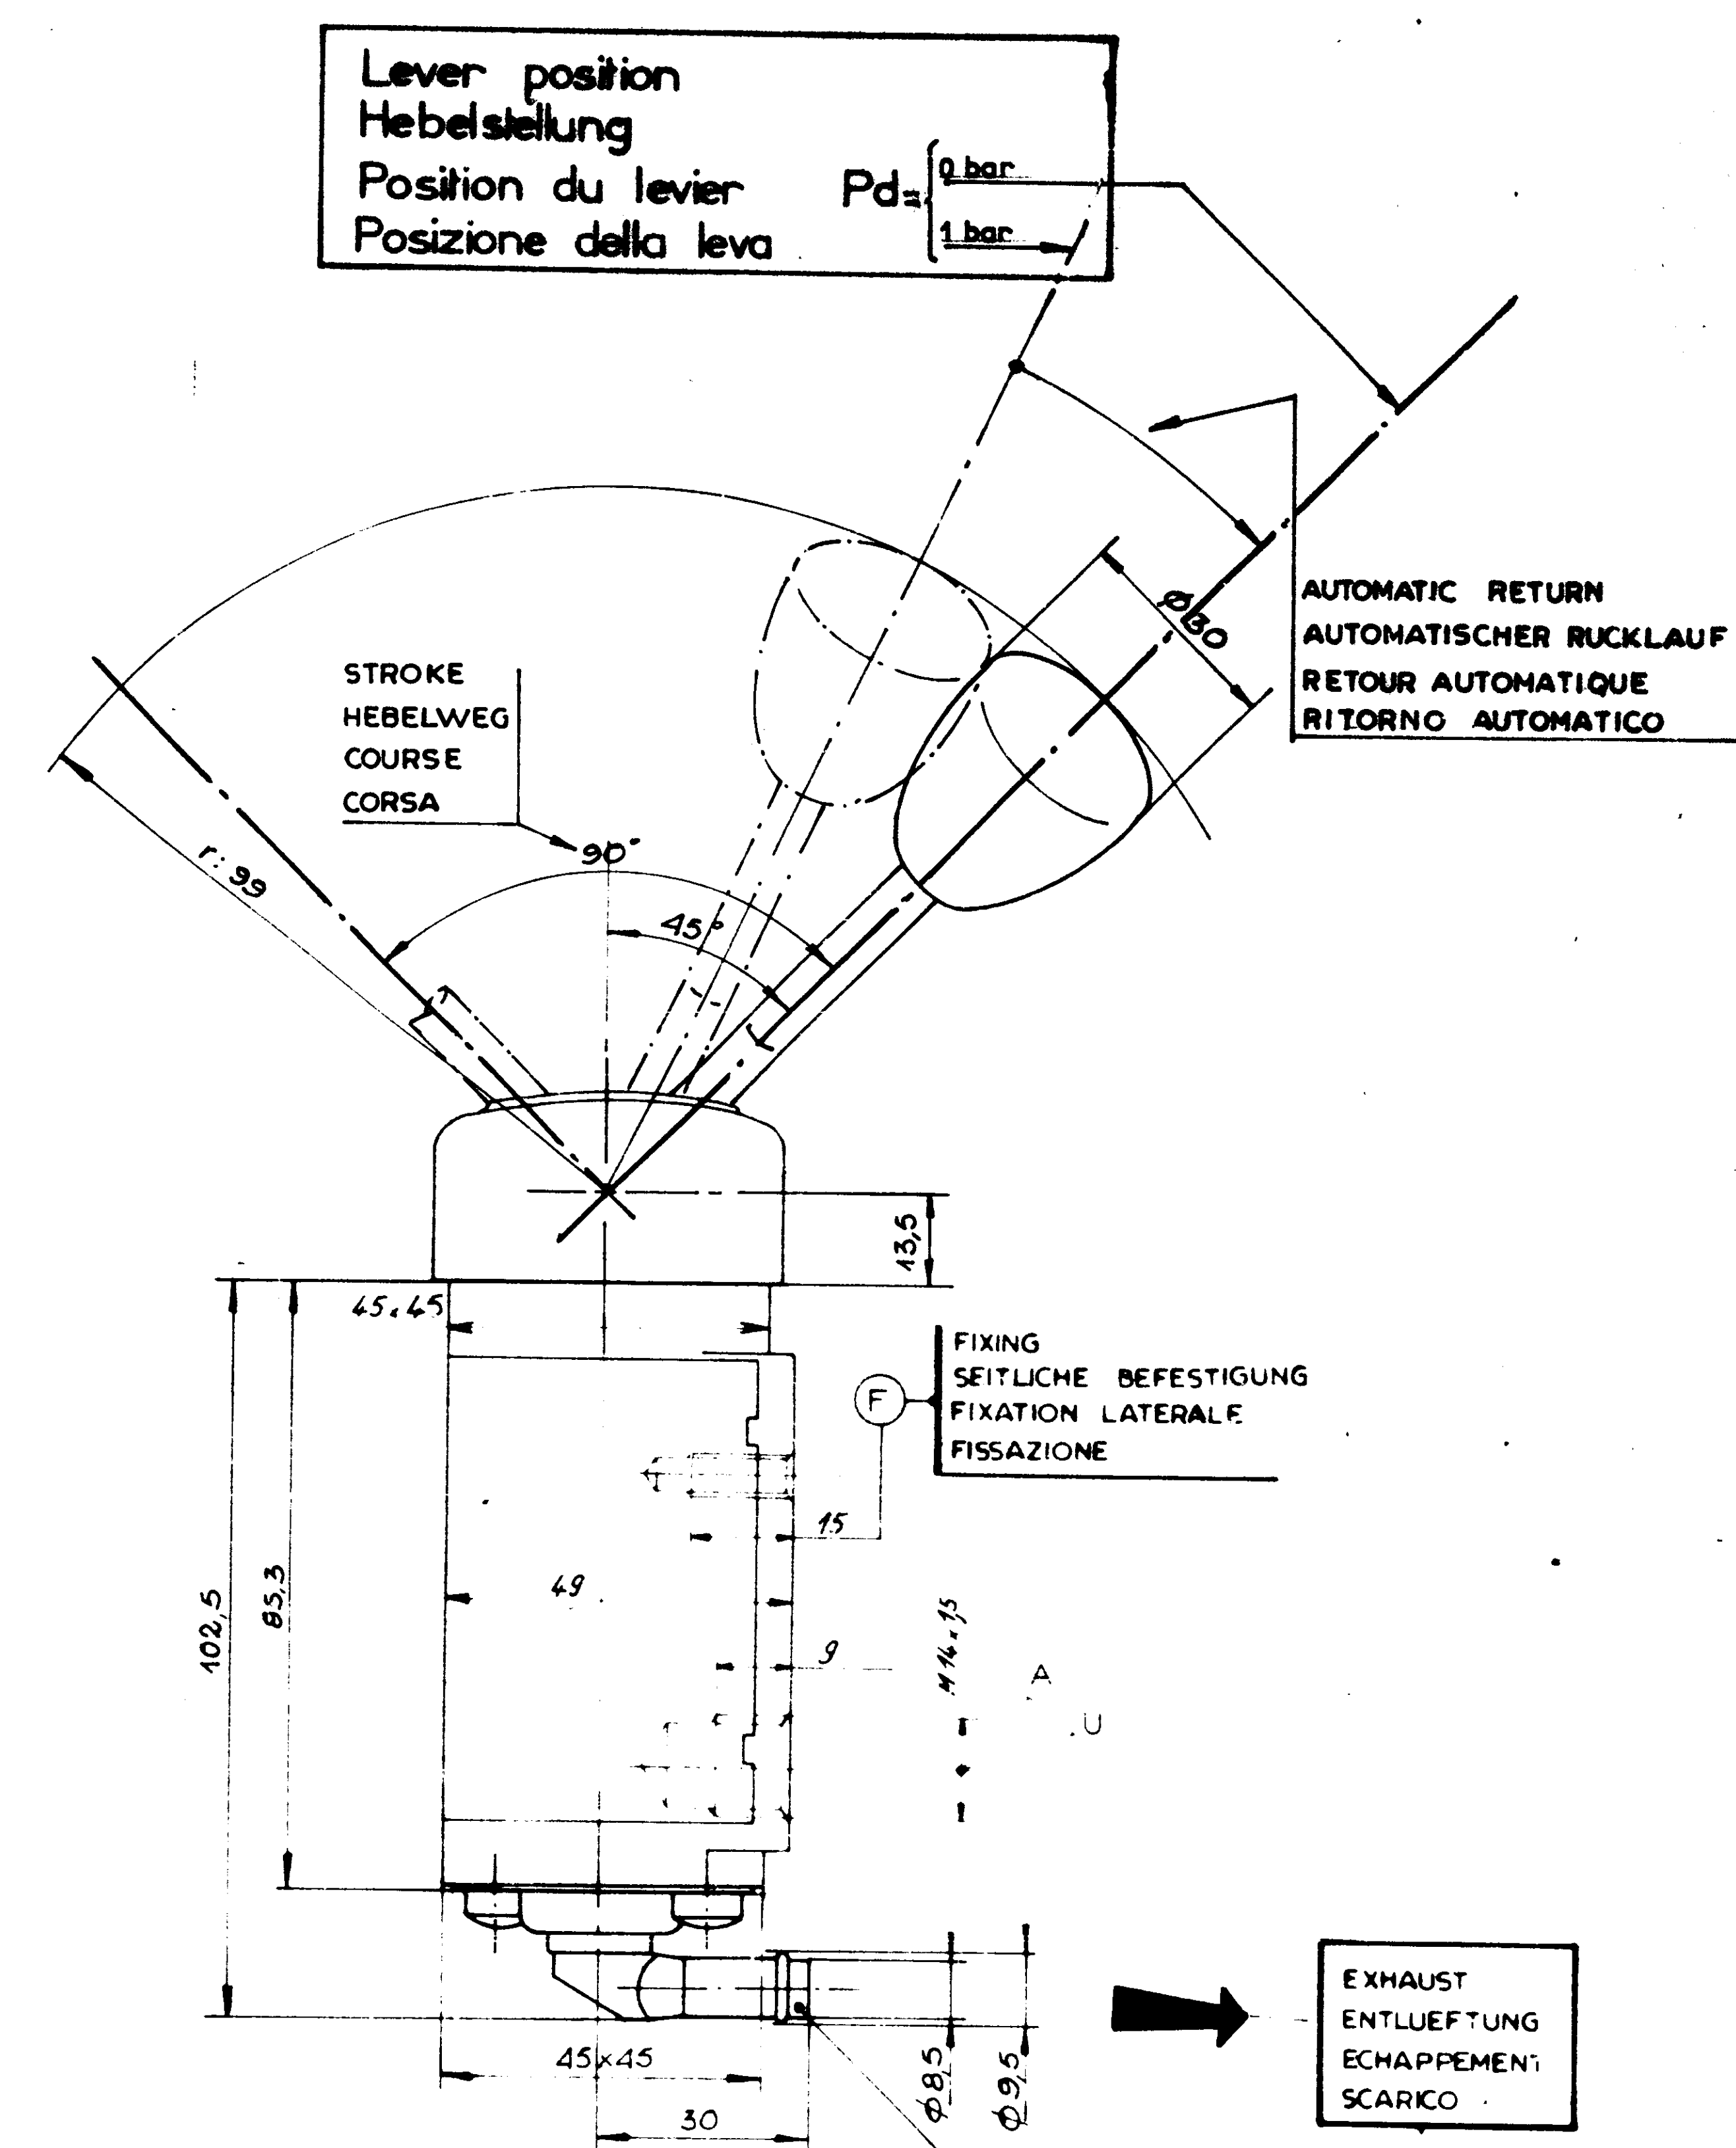


Lever position
Hebelstellung
Position du levier
Posizione della leva

Pd = 0 bar
1 bar

TECHNICAL DATA
TECHNISCHE DATEN
CARACTERISTIQUES TECHNIQUES
DATI TECNICI

DESIGNATION BESCHREIBUNG DESIGNATION DESIGNAZIONE	UNIT EINHEIT UNITA UNITA	VALUE WERT VALORE VALORE
MASS MASSE MASSA	M	kg
WORKING TEMPERATURE THERMISCHER ANWENDUNGSBEREICH TEMPERATURE DE FONCTIONNEMENT TEMPERATURA DI FUNZIONAMENTO	T	°C
MEDIUM MEDIUM FLUIDE FLUIDO	COMPRESSED AIR DRUCKLUFT AIR COMPRESSE ARIA COMPRESSA	
MAX INLET PRESSURE MAX BETRIESDRUCK PRESSION MAXIMUM D'ALIMENTATION PRESSIONE MASSIMA D'ALIMENTAZIONE	P ₀ M	bar
ADJUSTING DELIVERY PRESSURE ACCORDING TO EINSTELLUNG DES AUSGESTEUERTEN DRUCKES NACH REGLAGE DE LA PRESSION D'UTILISATION SUIVANT REGOLAZIONE DELLA PRESSIONE DI UTILIZZAZIONE	Pd	bar
WORKING POSITION EINBAULAGE POSITION DE FONCTIONNEMENT POSIZIONE DI FUNZIONAMENTO	UNIMPORTANT BELIEBIG INDIFFERENTE INDIFFERENTE	

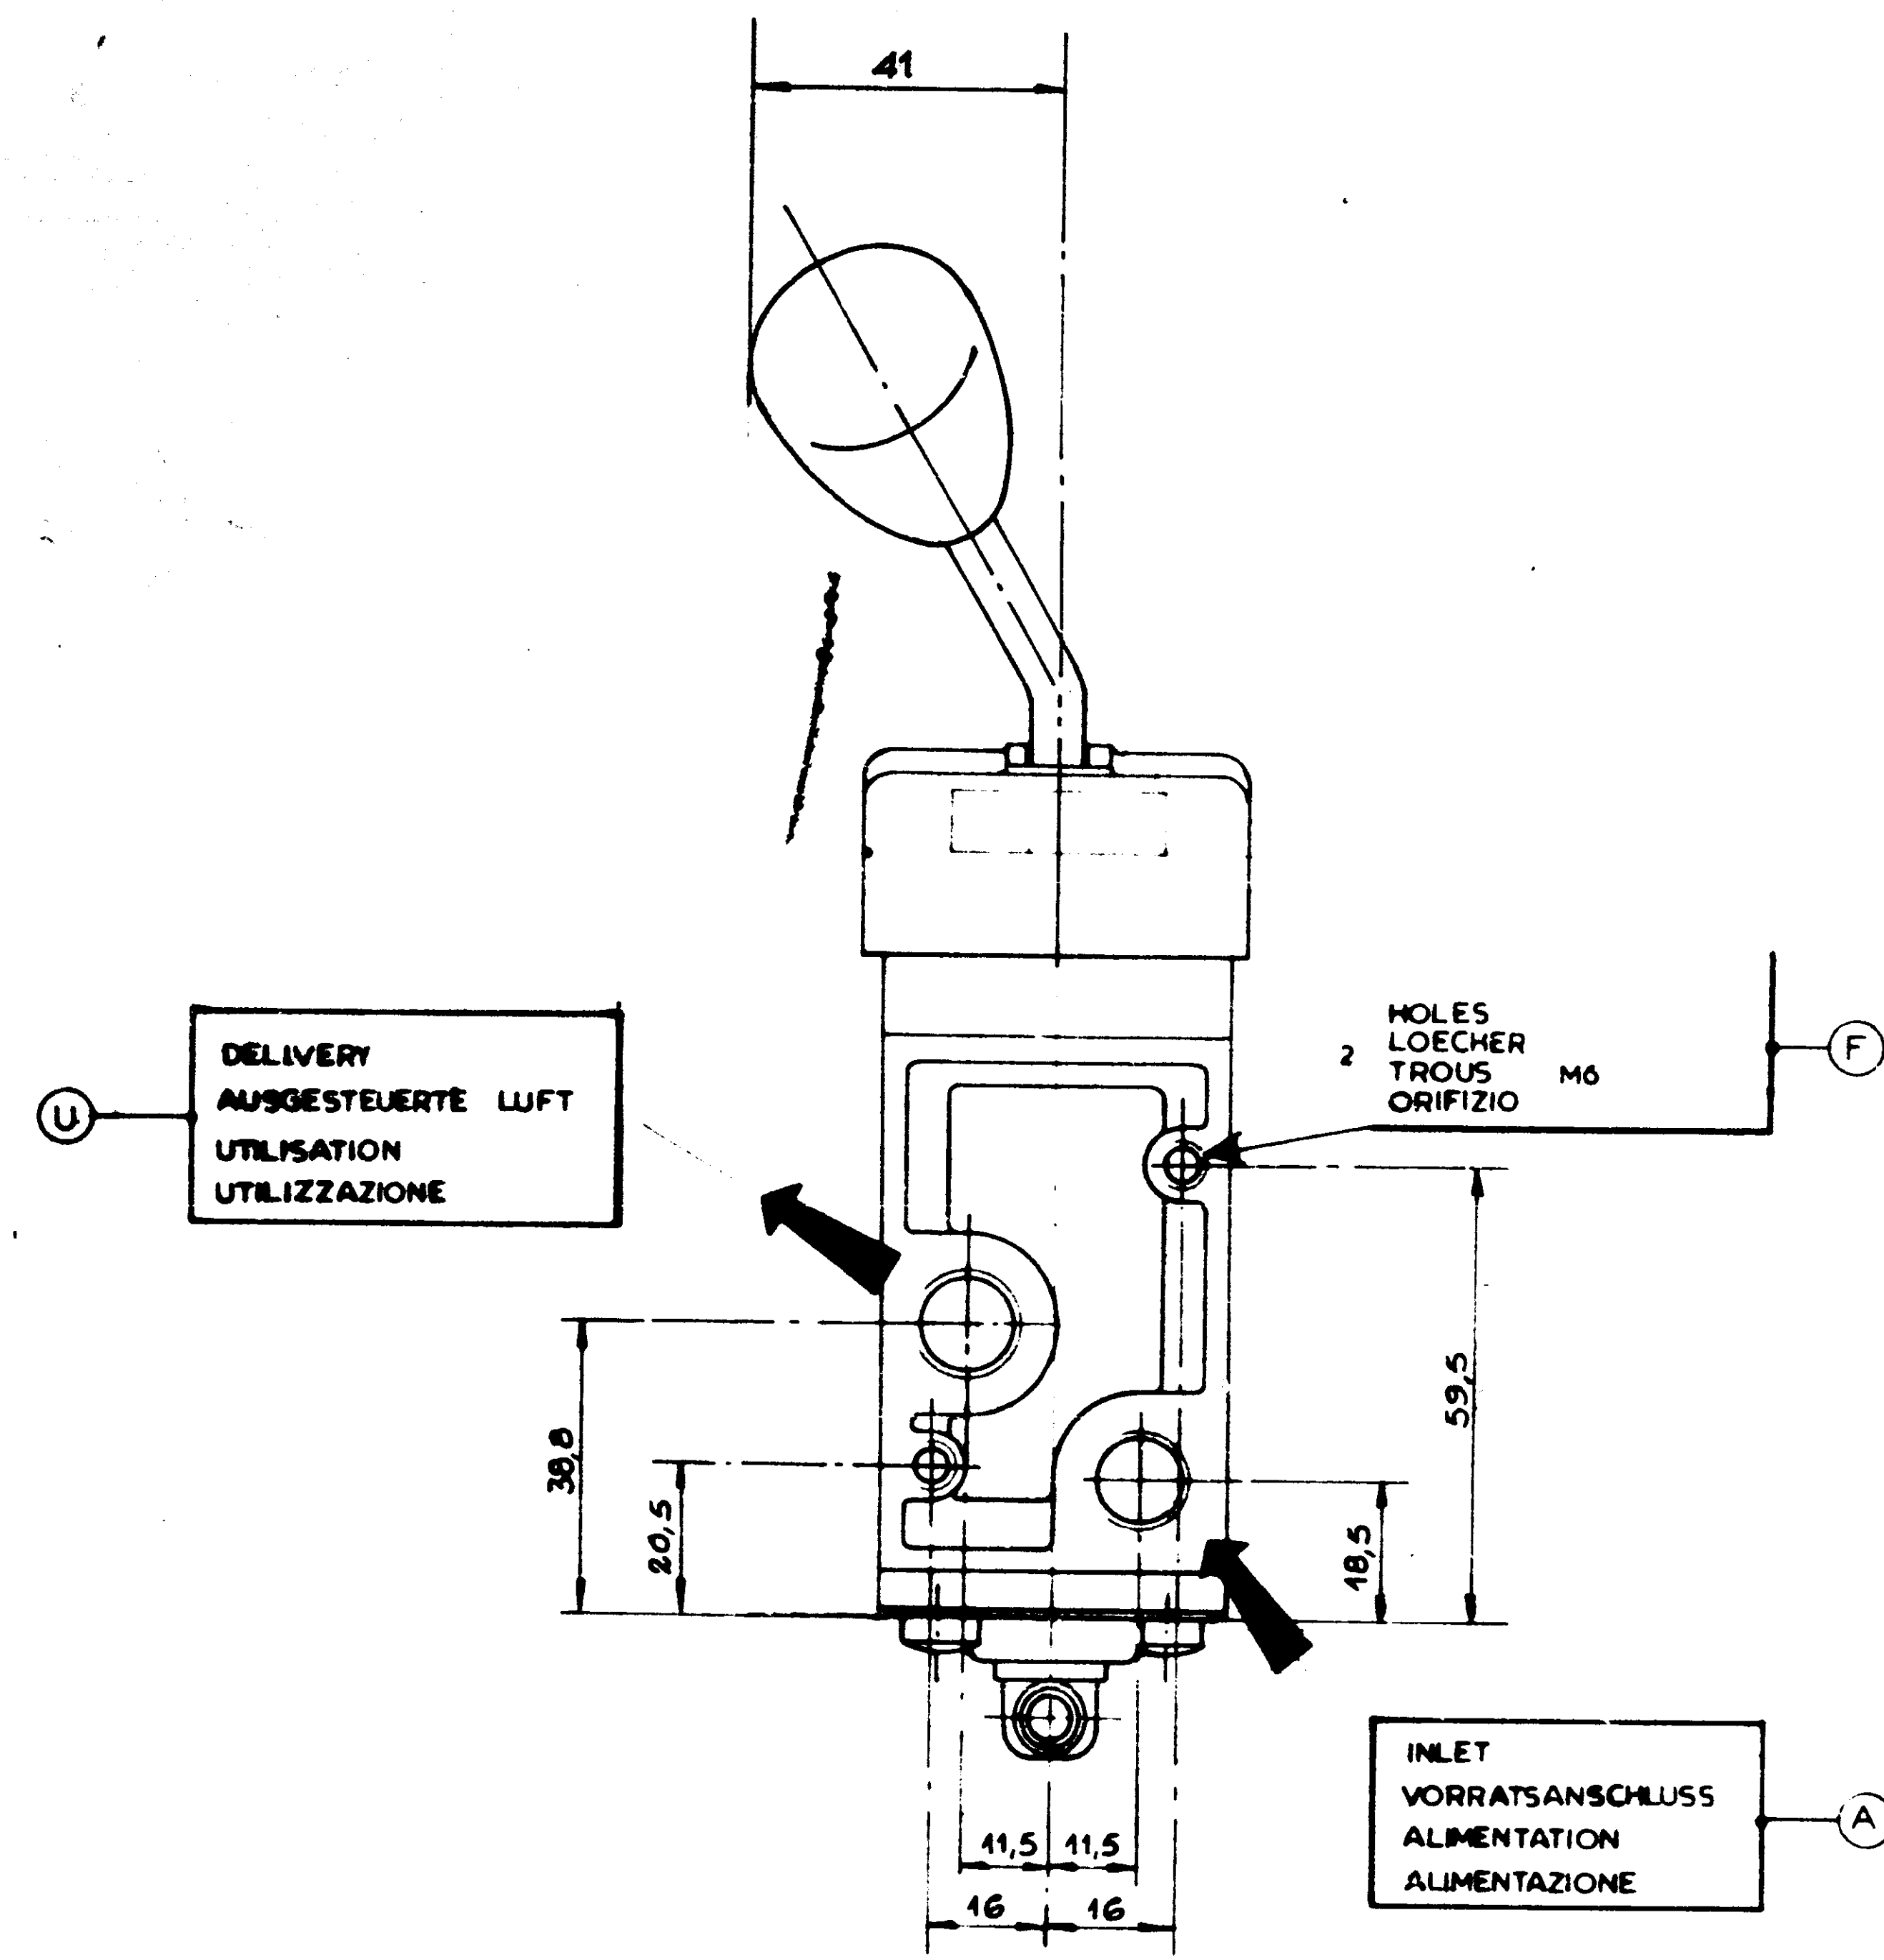


THIS CONNECTION WITH PIPE 9x12 IS ORIENTABLE
WHEN FIXED WITHOUT CLIP

DIESE ROHRVERBINDUNG MIT ROHR 9x12 IST
DREHBAR SOFERN KEINE ROHRSCHELLE MONTIERT IST

CE RACCORD AVEC TUYAU 9x12 EST ORIENTABLE SI
MONTÉ SANS COLLIER

QUESTO RACCORDO CON UN TUBO 9x12 È ORIENTABILE
MONTATO SENZA COLLARE DEL FRENATURA

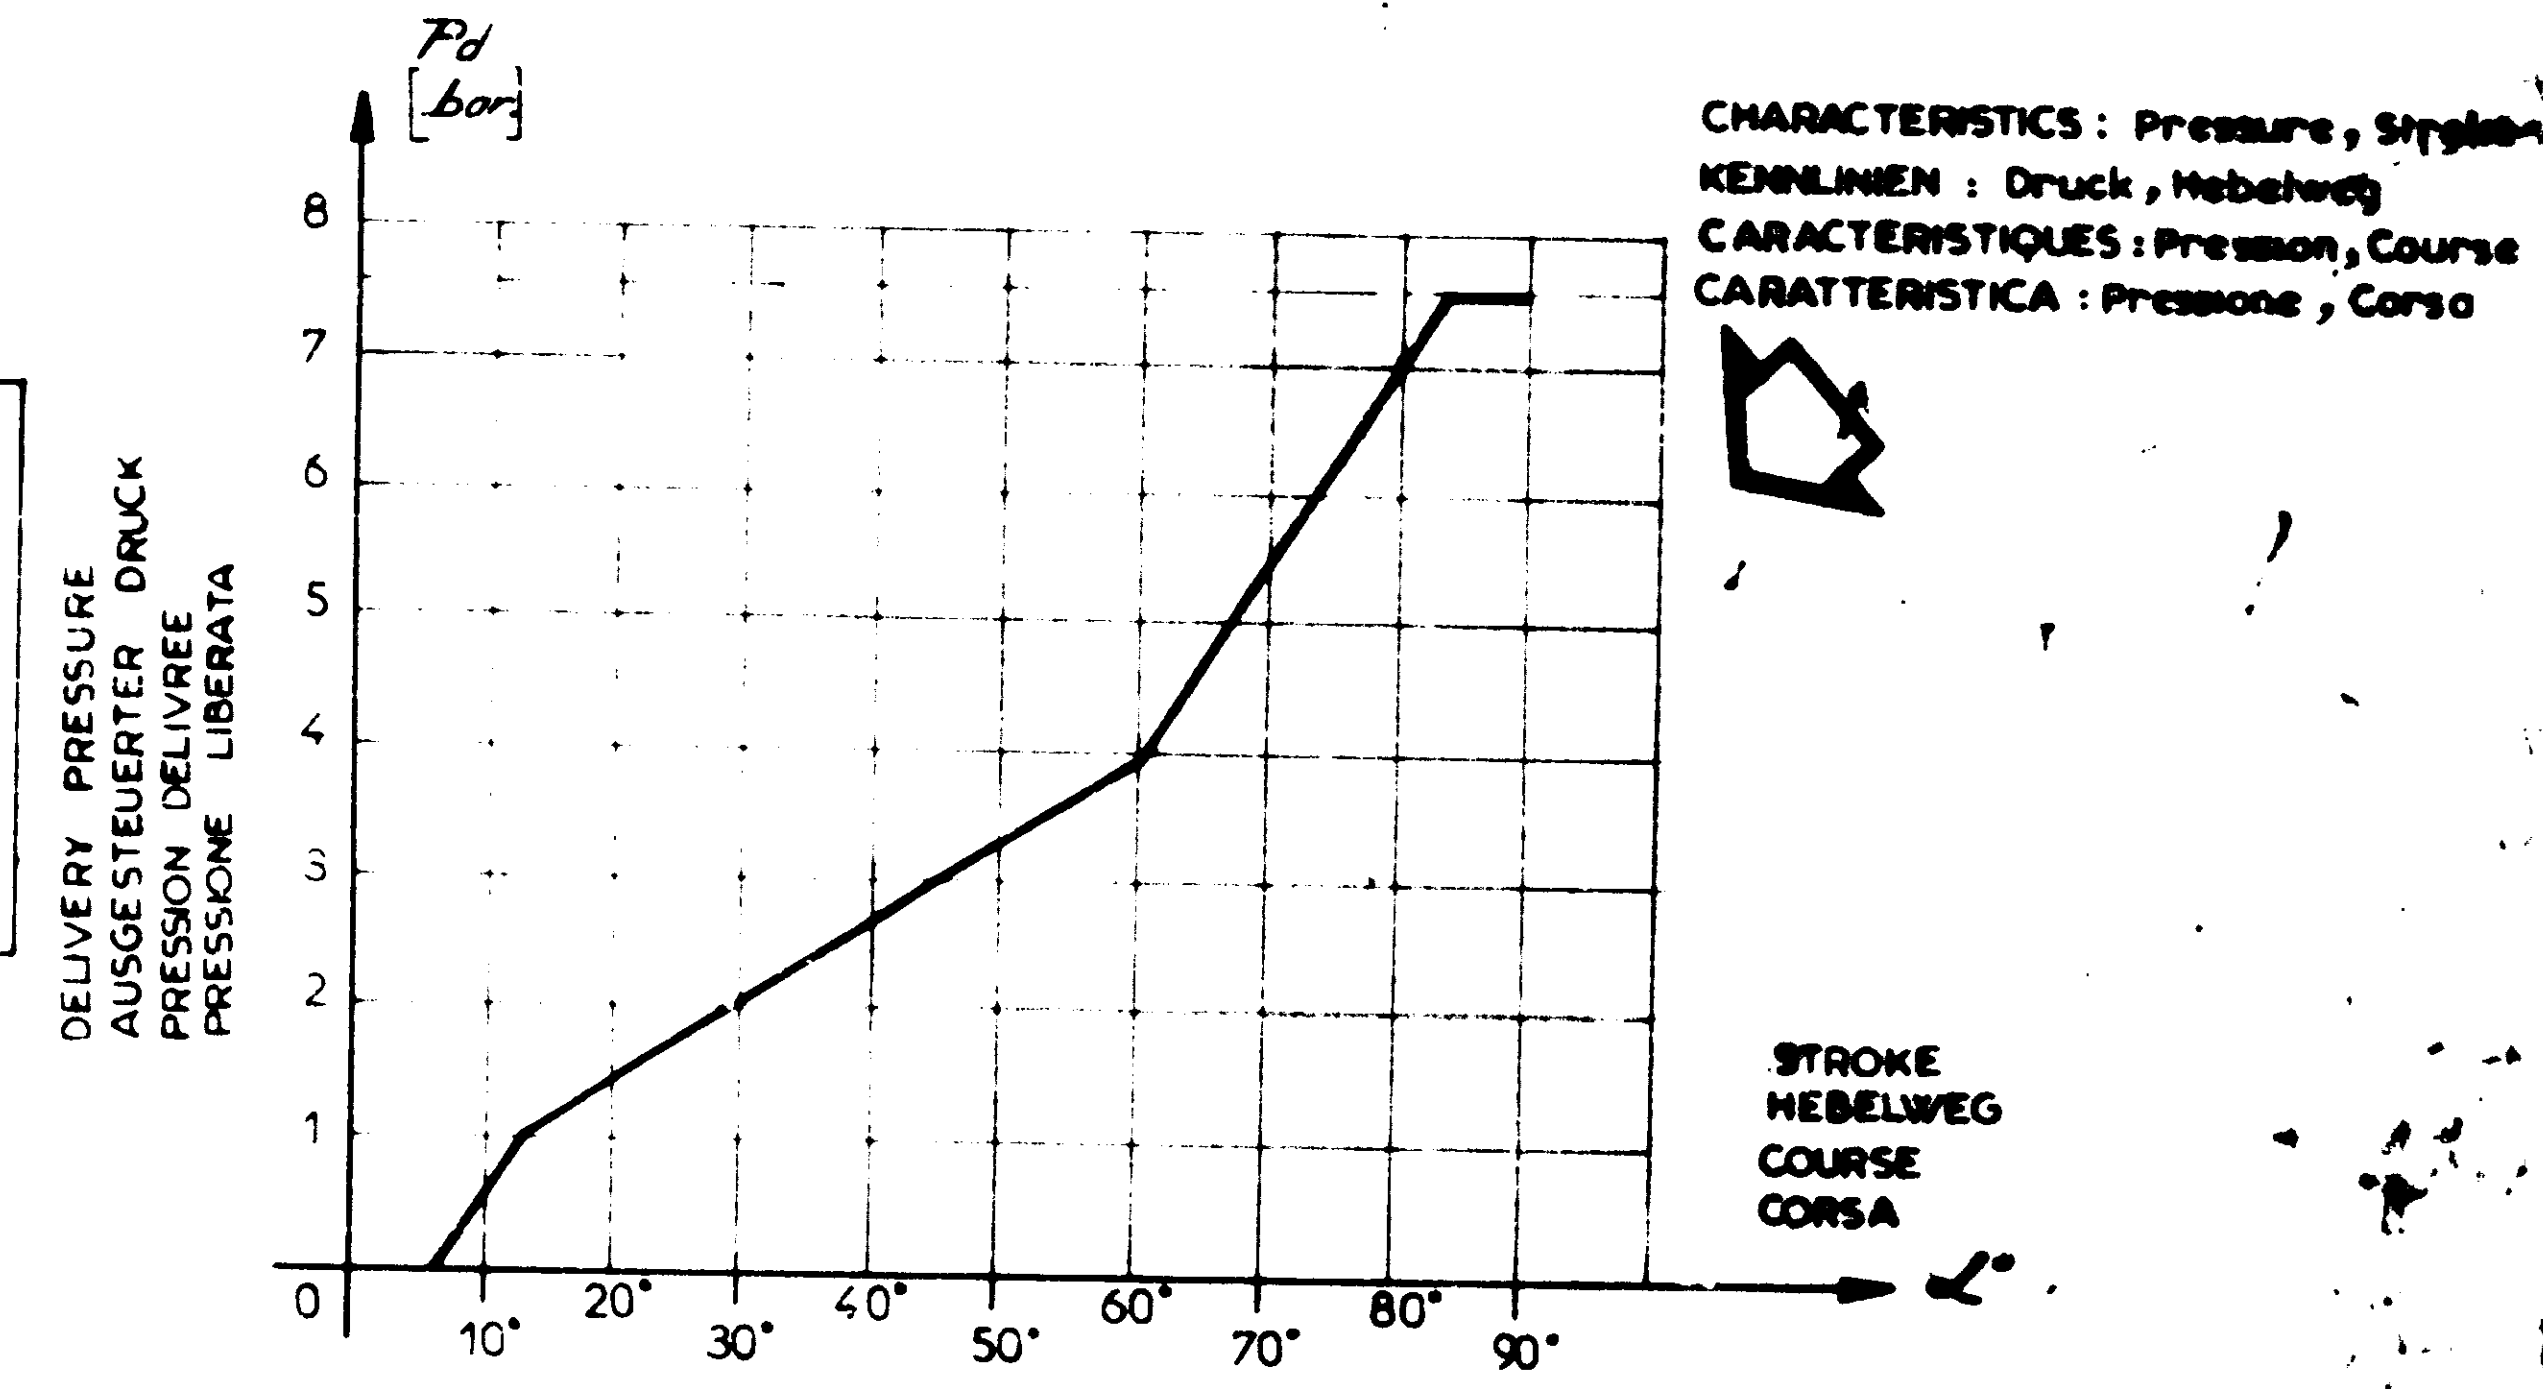

79088 79.08.22

DATE: 79.08.22

WABCO WESTINGHOUSE

MVM VALVE
MVM VENTIL
VALVOLA FRENANTE MVM
ROBINET MVM

961 721 007 0

723 397 96

100 mm