

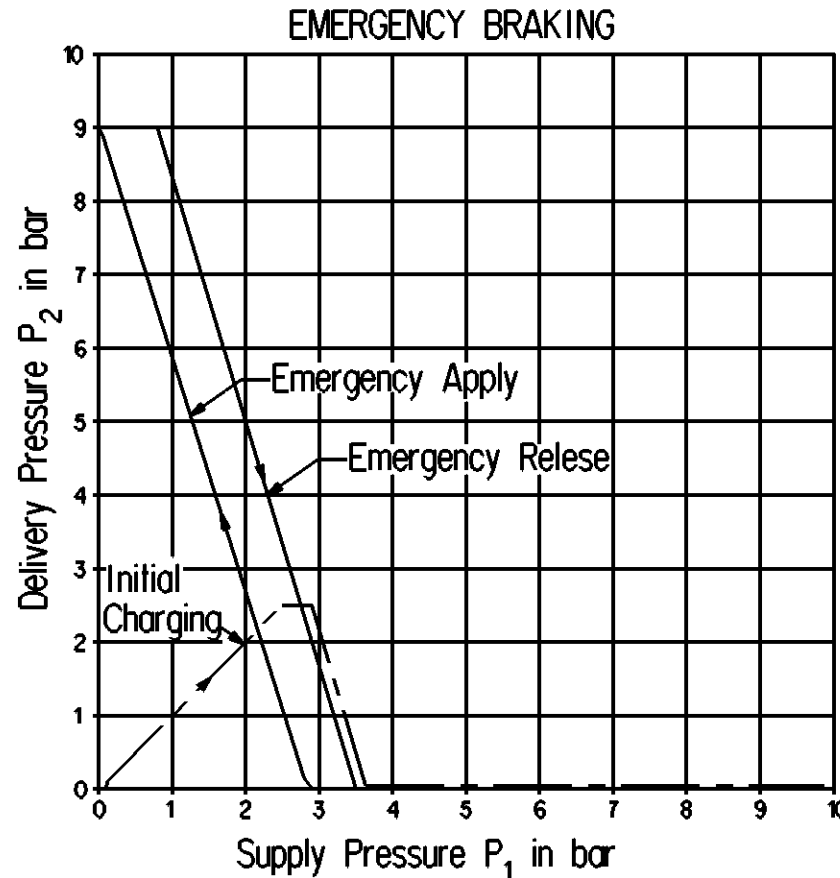
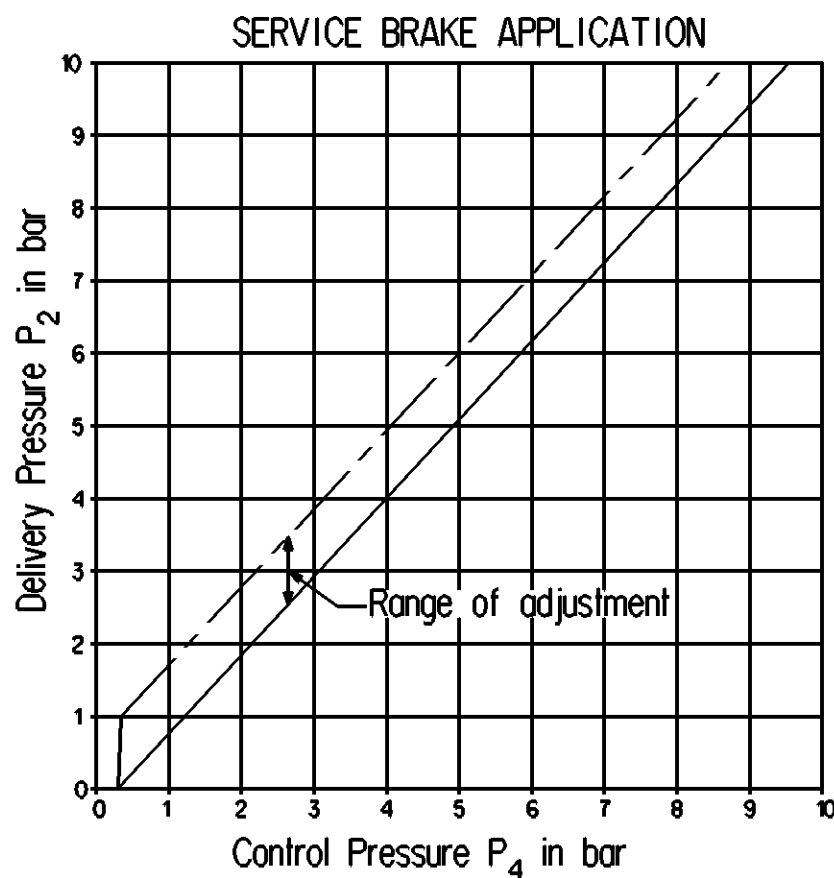
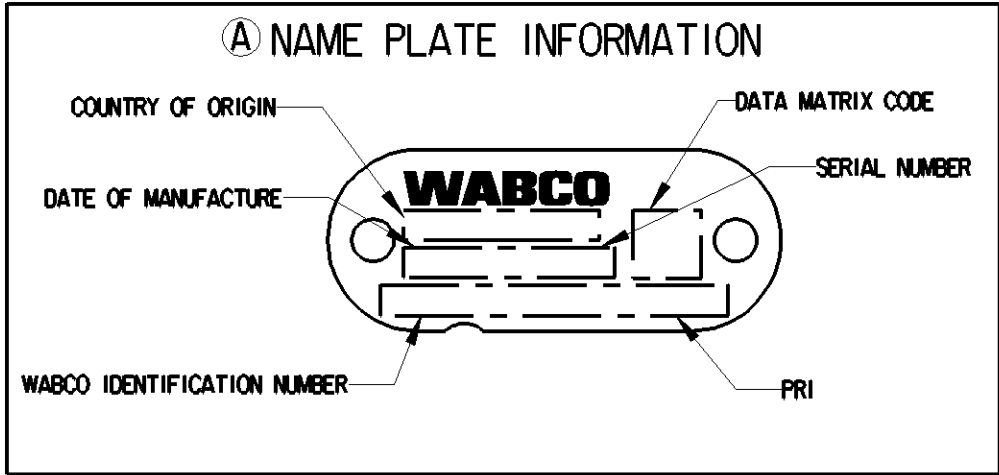
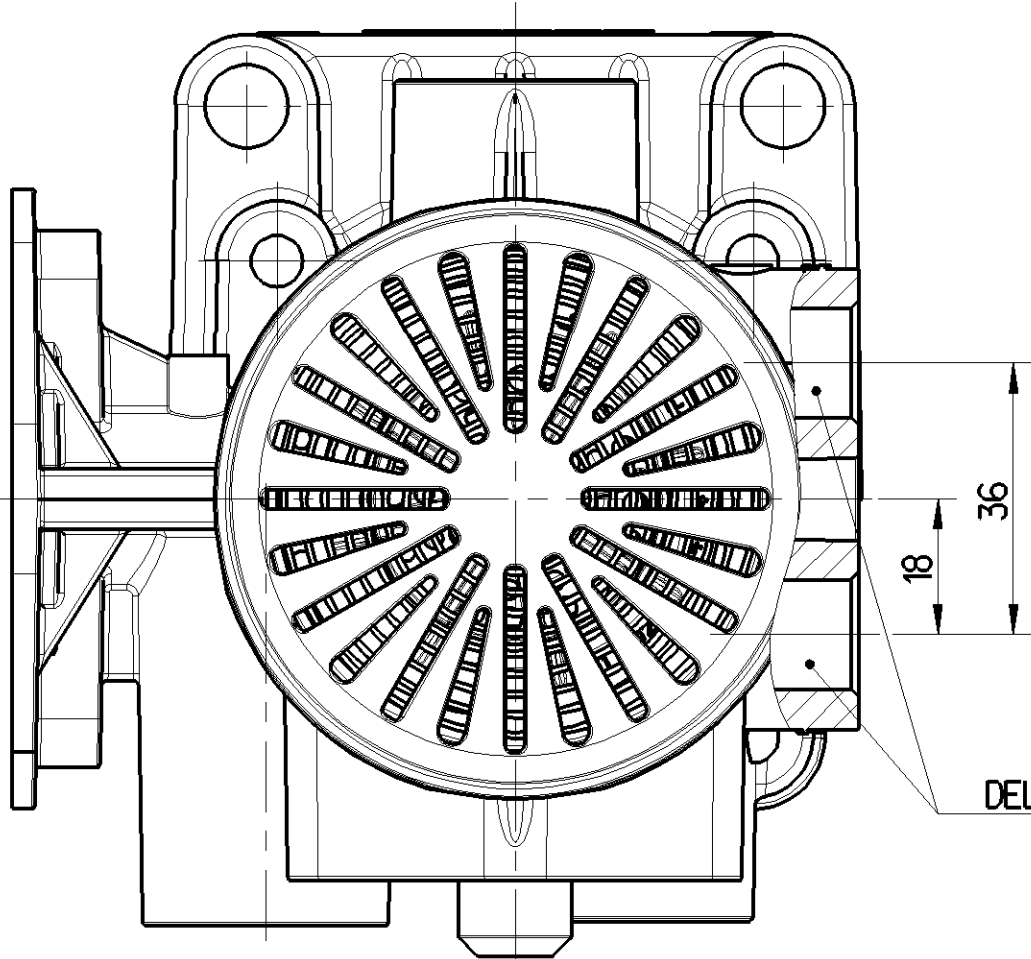
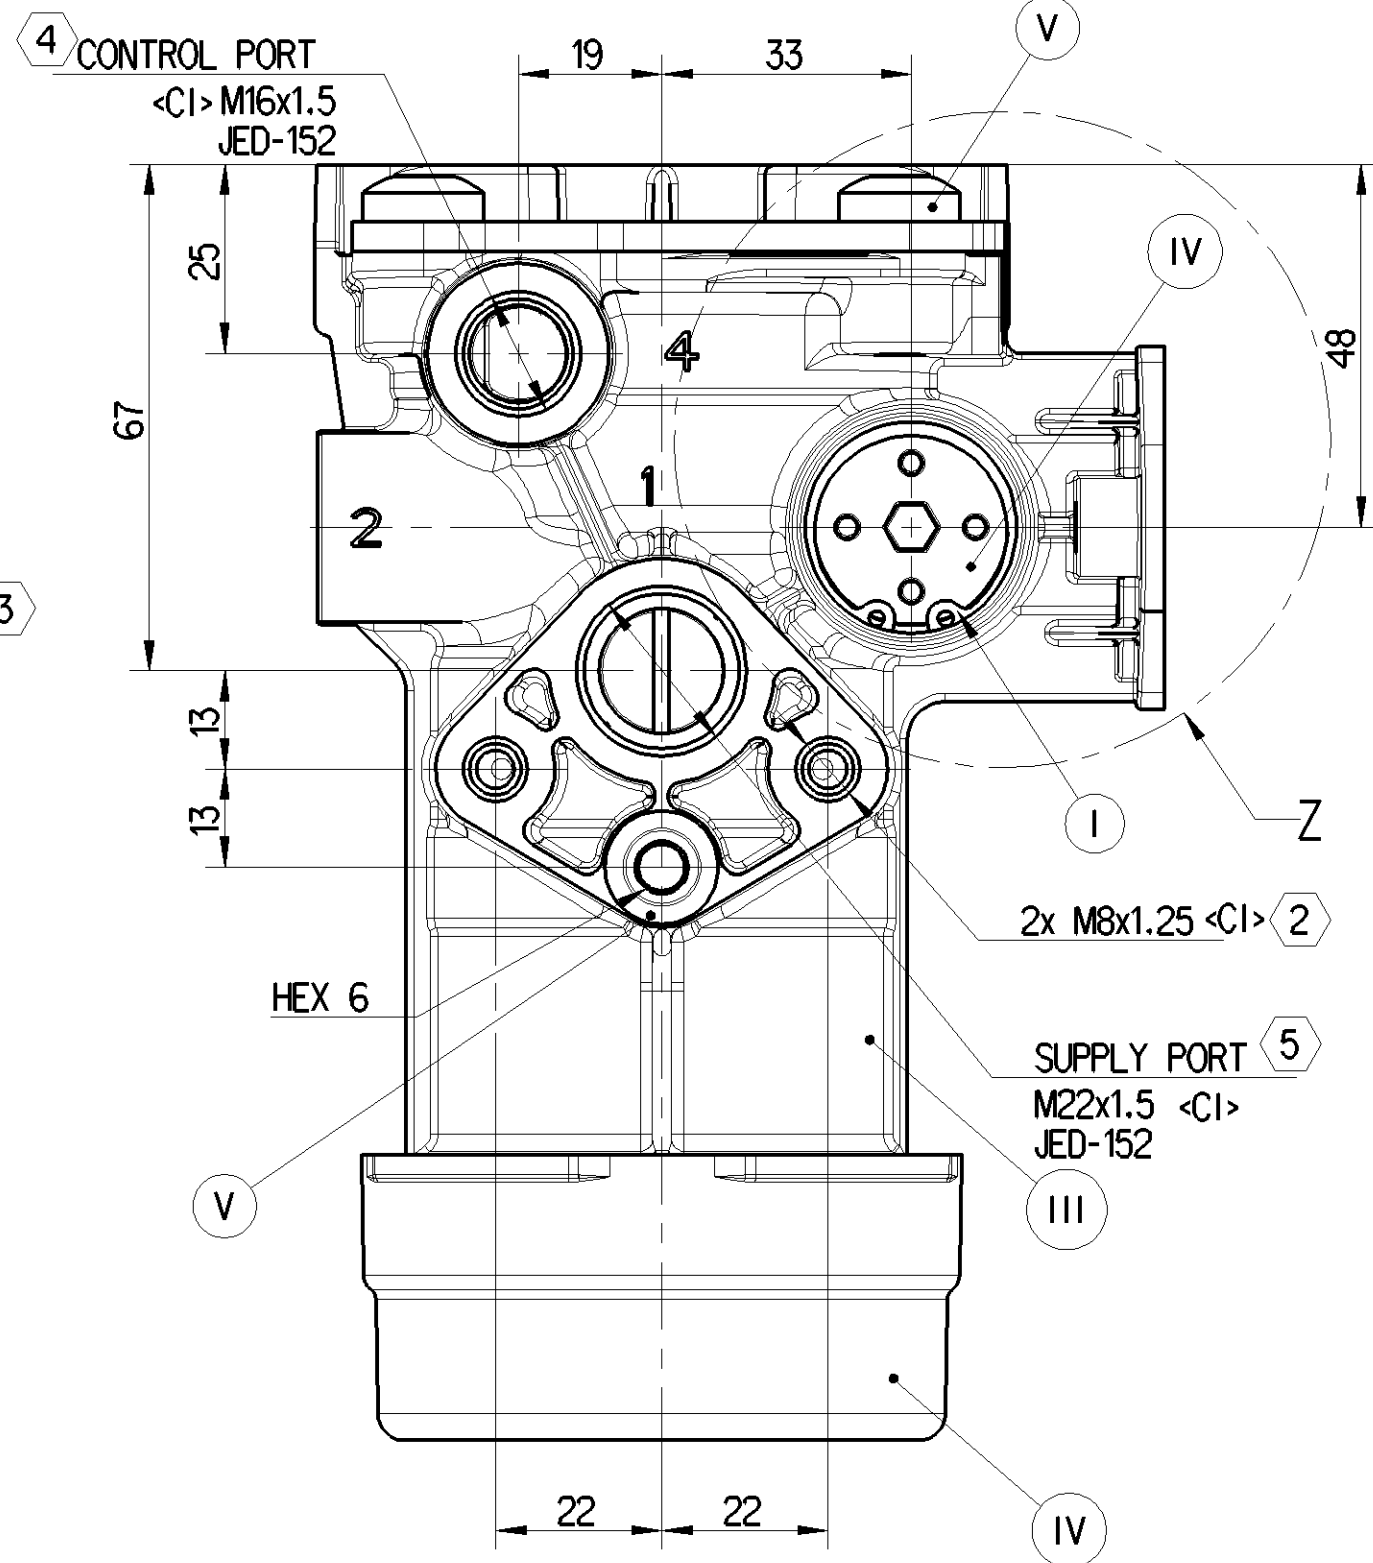


Non è permesso copiare, o parte o riproduzione di questo documento, né utilizzare il contenuto o renderlo comunque noto a terzi senza permesso scritto dalla WABCO. È vietata espressamente la ristampa o l'uso non autorizzato di questo documento. Toute réimpression ou reproduction de ce document, sans autorisation écrite de la WABCO, est formellement interdite. Toute utilisation non autorisée du contenu de ce document est formellement interdite. Alle Rechte für den Fall der Übersetzung oder elektronische Weitergabe vorbehalten. Copyright of this document and giving it to others and the use or communication of the content thereof, are forbidden without express written permission of WABCO. All rights reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

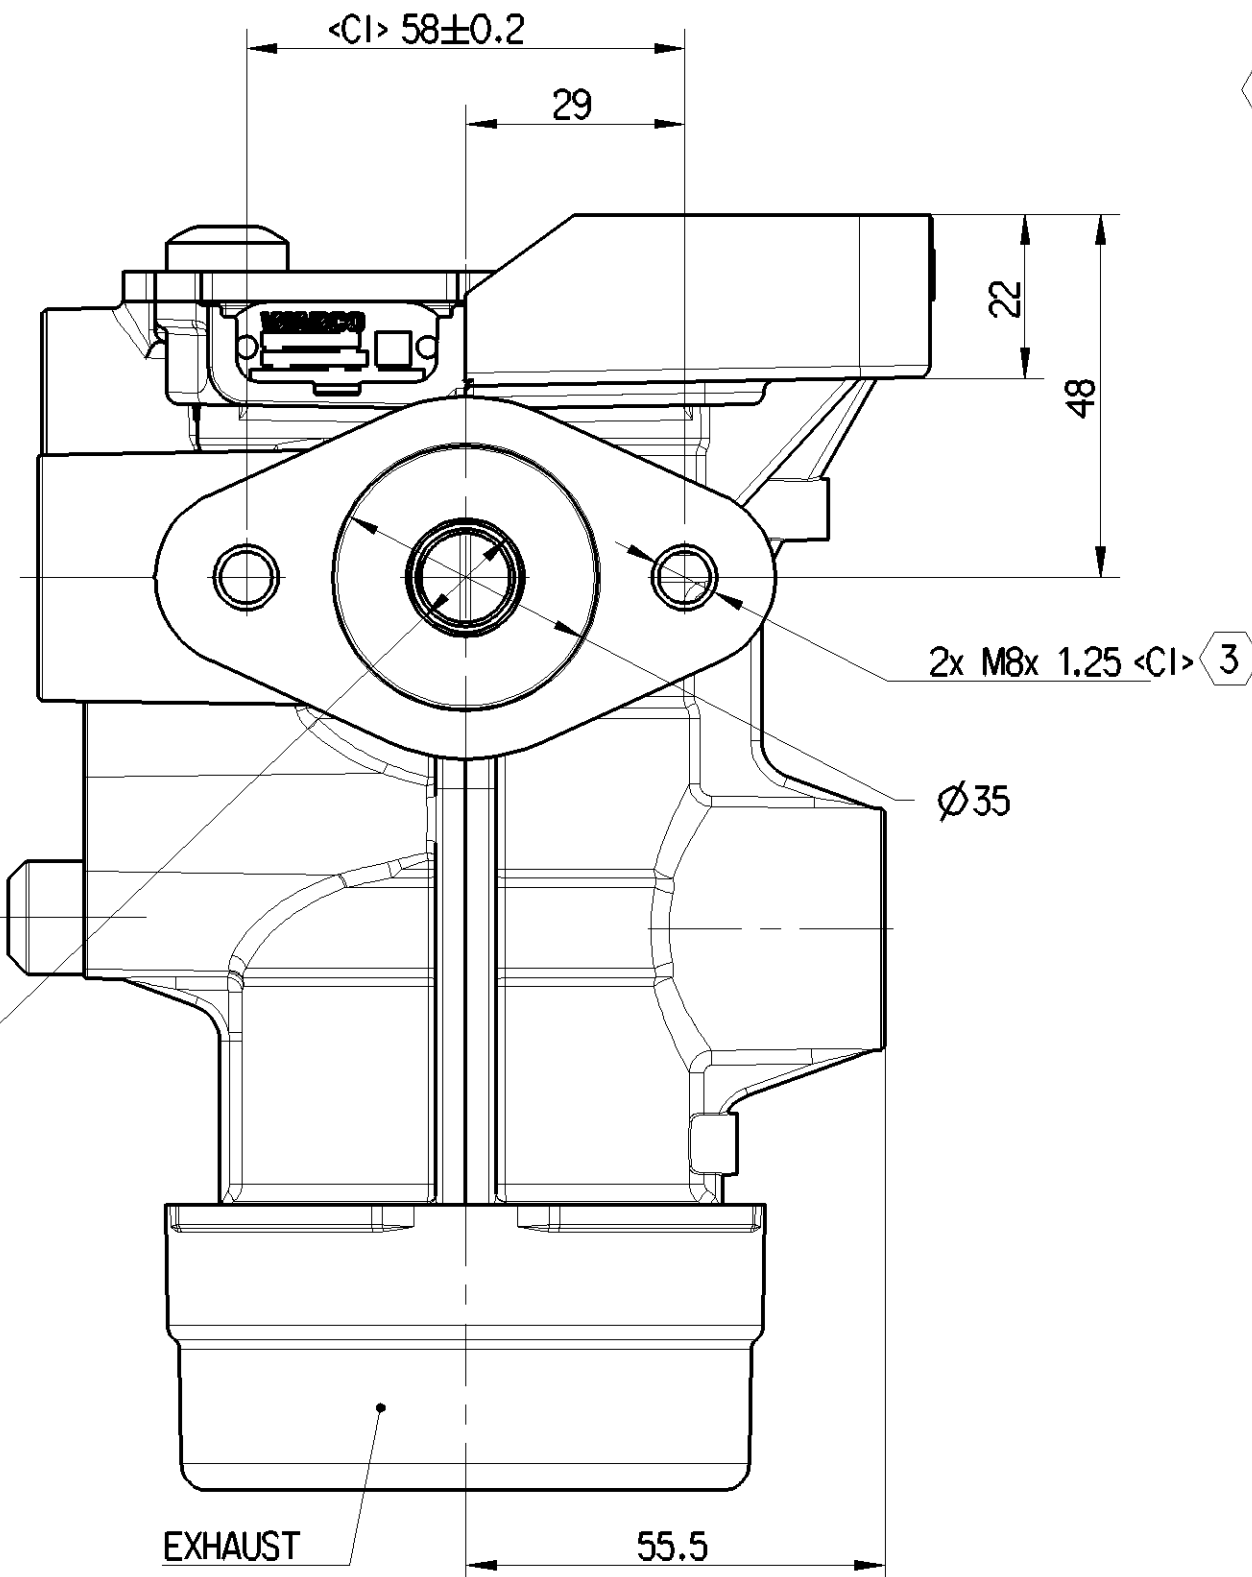

	WORKING MEDIUM	AIR
	THERMAL RANGE OF APPLICATION	-40° TO +65°C
	SHORT TERM RESISTANCE TO HEAT	MAX. 1h AT 110°C
	NOMINAL WORKING PRESSURE	9 bar
	MAXIMUM WORKING PRESSURE	10 bar
	PREDOMINANCE ADJUSTMENT RANGE PRESSURE	0 TO 0.7 bar
	FILLING CRACK-OFF	0.5 bar MAX.
	RELAY RATIO	>1
	CRACK-OFF PRESSURE (WITHOUT PREDOM)	0.3 bar MAX. (+65°C TO -20°C) 0.35 bar MAX. (-20°C TO -40°C)
	INSTALLATION POSITION	VERTICAL ±60° ALLOWED
PORT DESIGNATION	1	SUPPLY PORT
	1-2	RESERVOIR PORT
	2 (3x)	DELIVERY PORT
	4	CONTROL PORT
	TIGHTENING TORQUE FOR MOUNTING BOLTS	45±2 Nm

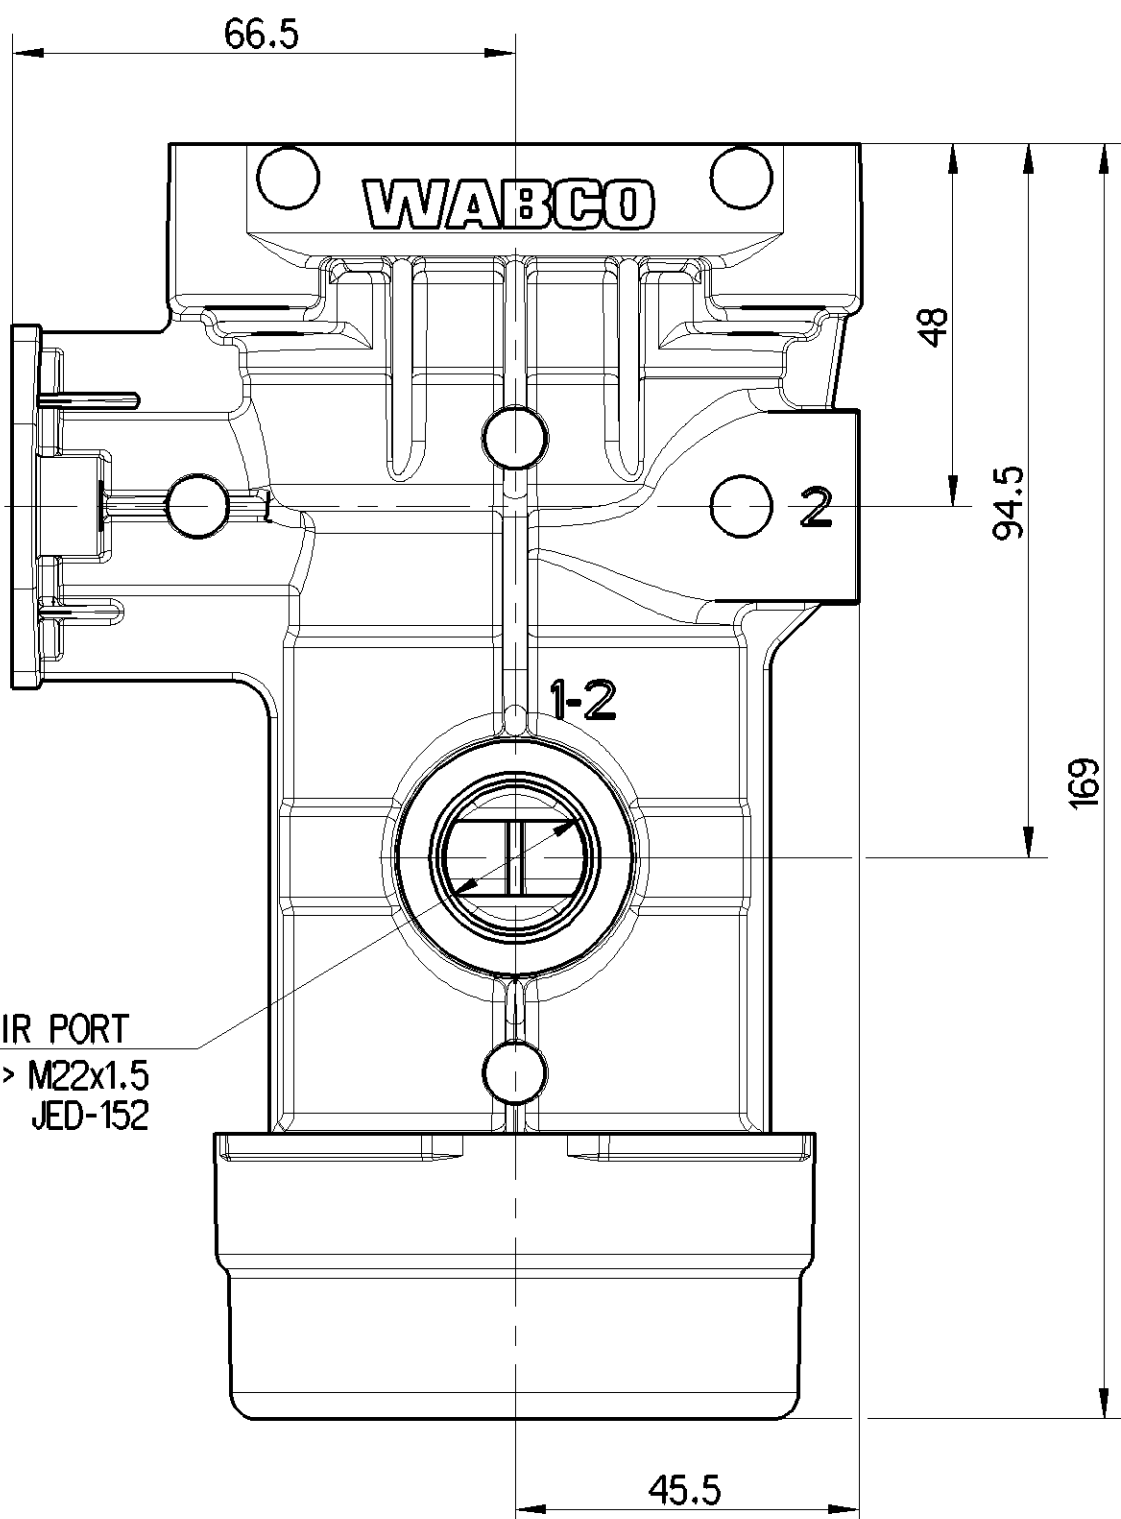

CONDITION	FROM	TO	NOMINAL DIAMETER
FILLING	PORT 1	PORT 1-2	≥10 mm
BRAKING	PORT 1-2	PORT 2	≥11.5 mm
EXHAUSTING	PORT 2	PORT 3	≥10.6 mm




NOTE:

- 1 PREDOMINANCE ADJUSTMENT
- 2 ATTACHMENT OF TRAILER RELEASE VALVE
RECOMMENDED TORQUE: 18±2 Nm
- 3 ATTACHMENT OF LOAD SENSING VALVE
RECOMMENDED TORQUE: 22±2 Nm

PART CODE	MATERIAL	SURFACE PROTECTION
V	STEEL	ZINC NICKEL PLATED
IV	PLASTIC	NO TREATMENT
III	ALUMINIUM ALLOY	CHROMATED
II	STEEL	POWDER COATED
I	STEEL	ZINC PLATED

RECOMMENDED TORQUE FOR FITTINGS:

- 4 THREAD-M16x1.5, TIGHTENING TORQUE: 30 TO 35 Nm
- 5 THREAD-M22x1.5, TIGHTENING TORQUE: 34 TO 40 Nm

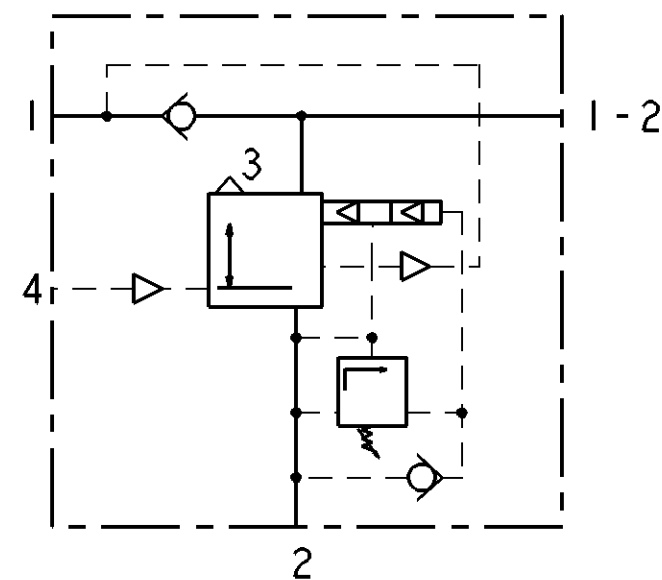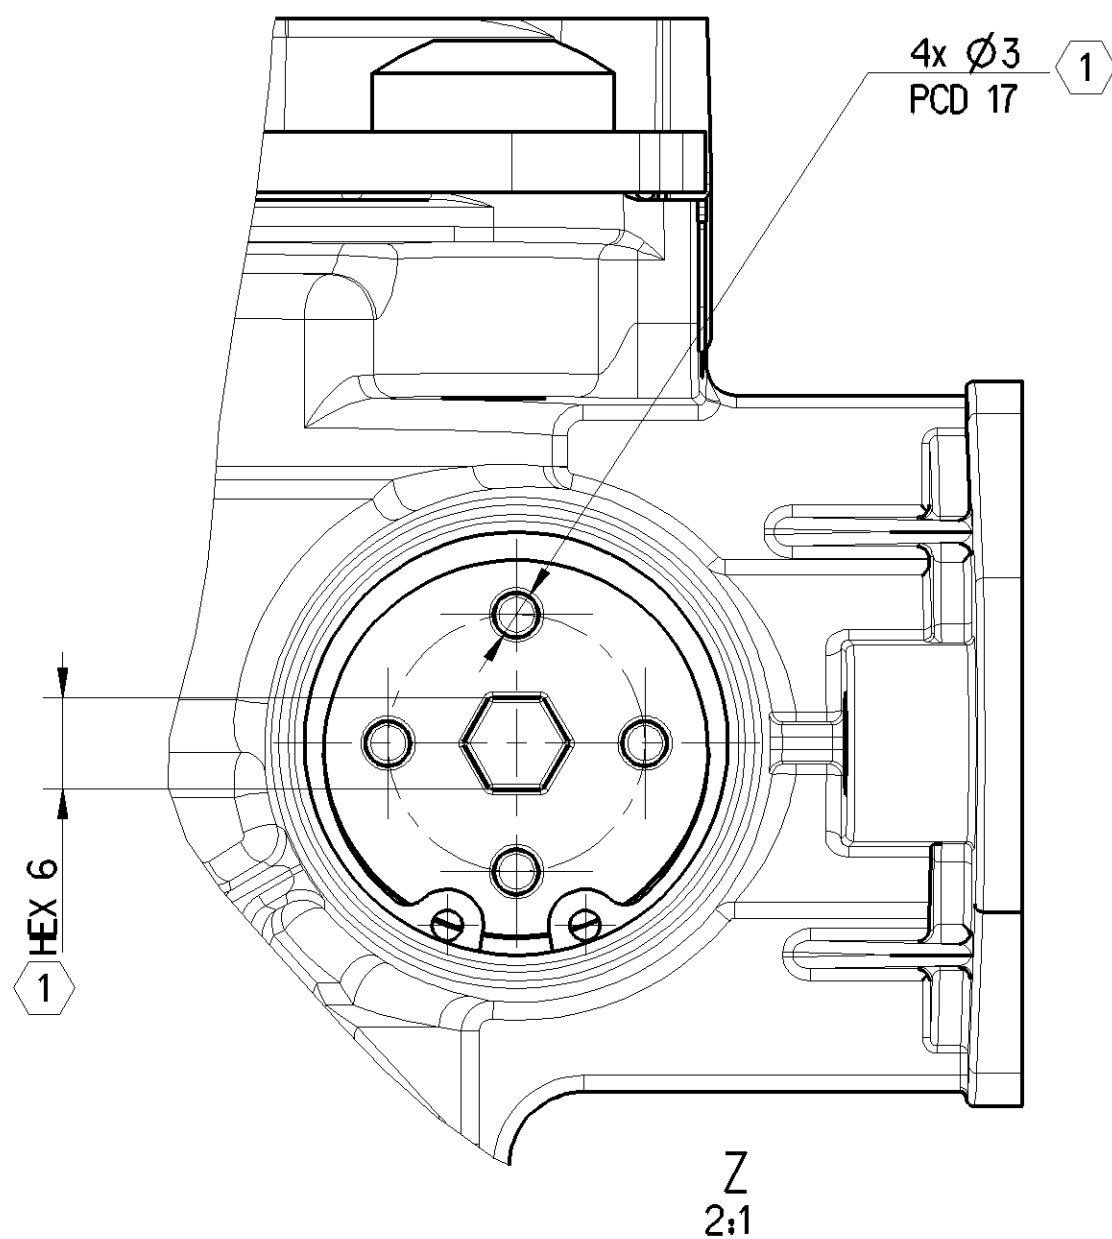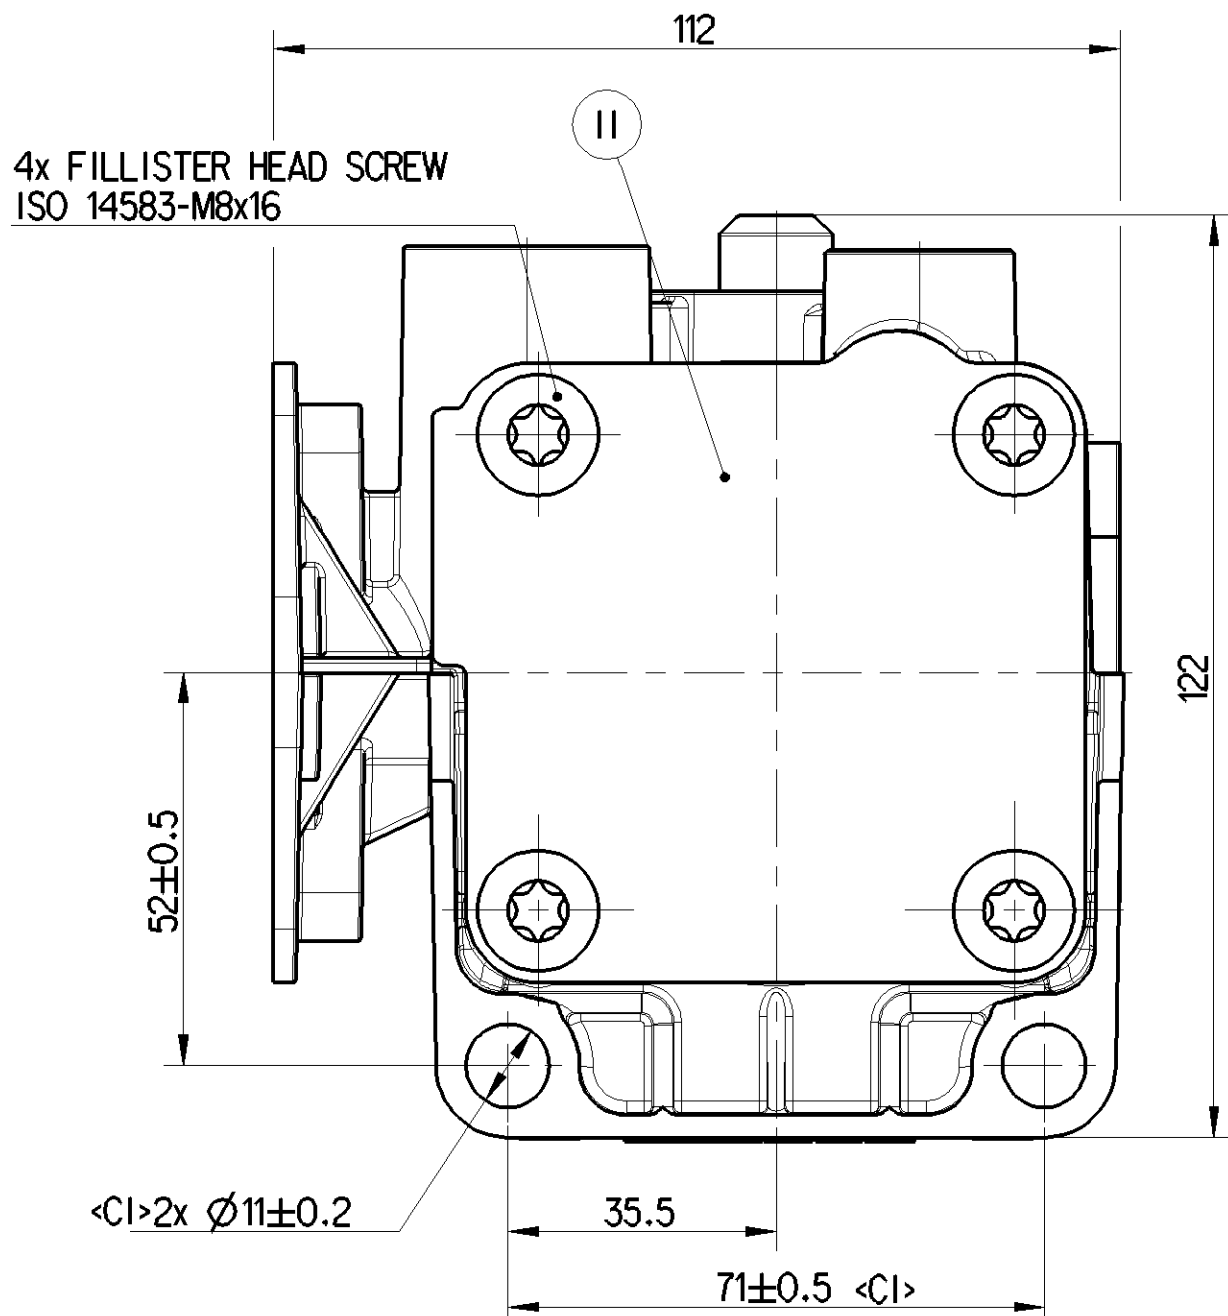

General Specifications: JED-334-1 - Size ISO 14405 LP				Copyright WABCO®			
Further Technical Data: 971 002 049 0				Date	Drawn	Signature	
Doc. Code: 035				2021-05-31	M S		
General Tolerances JED-261				Checked	Expert		
Range of Nominal Dimensions (± mm)				2021-07-29	Szyska		
				Pomuragoraj C			
				Mass	Scale	Material No.	
				1.277	1:1	971 002 030 0	
				Size	CAD System	Revision	Techn. Resp.
				A 1	CREO	507805	5250
				Tapped Holes acc. -			
				1) Tolerance Class Applied Crossmarked			
				Date of first issue: 2018-08-19			
				Doc. Code	Language	Sheet	
				005	EN	1/1	