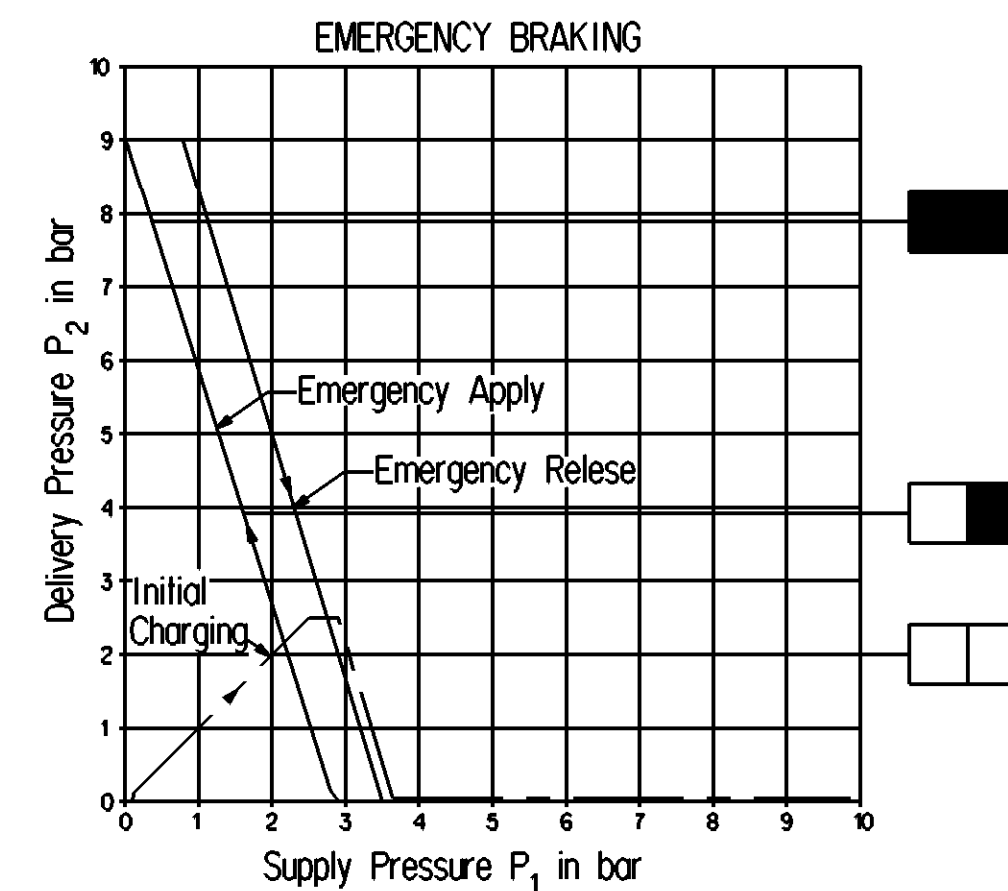


3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----

[illegible]

	F
	C

u

k

▷ PREDOMINANCE ADJUSTMENT
 ▷ ATTACHMENT OF TRAILER RELEASE VALVE
 ▷ ATTACHMENT OF LOAD SENSING VALVE
 RECOMMENDED TORQUE FOR FITTINGS:
 ▷ THREAD-M16x1.5, TIGHTENING TORQUE: 30 to 35 Nm
 ▷ THREAD-M22x1.5, TIGHTENING TORQUE: 34 to 40 Nm

