


ISO

OTHER

catalogue 2009 ALBUZ

# ALBUZ<sup>®</sup> OCI

## Off-centre nozzle

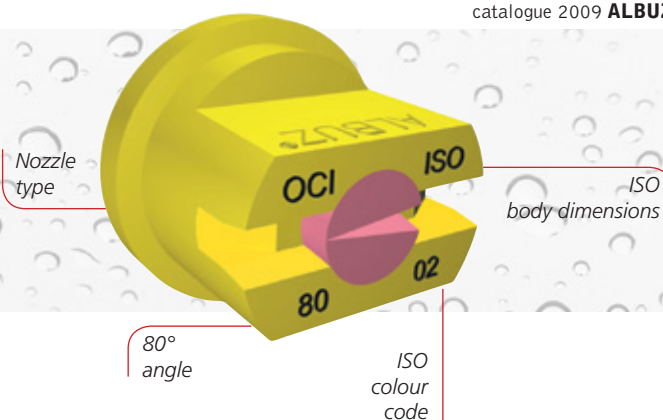


### MAIN CHARACTERISTICS

- ▶ Pink ALBUZ ceramic orifice (excellent precision and high wear resistance).
  - ▶ Flat fan pattern angle 80°.
  - ▶ Improves applications near sensitive areas: water courses, field edges... (see graphs below).
  - ▶ Designed for all types of nozzle holders,
- ▶ using the same cap as ALBUZ APE nozzles.
  - ▶ All types of treatments (pesticides, insecticides, herbicides, etc)
  - ▶ **Recommended pressure: 2 bar.**

### Flow rate chart


Colour	ISO code	Mesh	(bar)	l/mn	LITRES / HECTARE															
					NOZZLE SPACING: 50 CM															
					4 km/h	5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h	20 km/h				
YELLOW	OCI 11002	80 Mesh	2	0,65	195	156	130	111	98	87	78	65	56	49	43	39				
			3	0,80	240	192	160	137	120	107	96	80	69	60	53	48				
			4	0,91	273	218	182	156	137	121	109	91	78	68	61	55				
BLUE	OCI 11003	50 Mesh	2	0,98	294	235	196	168	147	131	118	98	84	74	65	59				
			3	1,20	360	288	240	206	180	160	144	120	103	90	80	72				
			4	1,39	417	334	278	238	209	185	167	139	119	104	93	83				
RED	OCI 11004	50 Mesh	2	1,31	393	314	262	225	197	175	157	131	112	98	87	79				
			3	1,60	480	384	320	274	240	213	192	160	137	120	107	96				
			4	1,85	555	444	370	317	278	247	222	185	159	139	123	111				

### PRESSURE RANGE




from 2  
to 4 bar

### SPRAY ANGLE

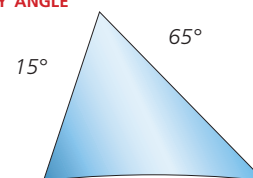


### Treatment on boom

#### 1. Standard

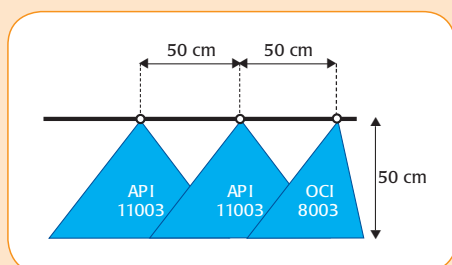

#### 2. Optimum

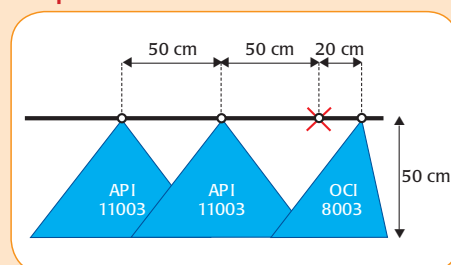

### Treatment on plants

