


Technical information

MOUNTING DETAILS

- Cylindrical and flanged bushings are normally mounted with a force-fitting mandrel.

- To ease mounting, we recommend to lubricate the bearing carrier face with grease or oil.
- When mounting bigger wrapped bushings, a mounting ring is recommended, whereby the bushing gets pre-centred. Thus, canting is prevented when force-fitting.
- The butt joint at wrapped sliding bearings which are exposed to high strains has to be aligned 90° opposite to the working resistance direction.

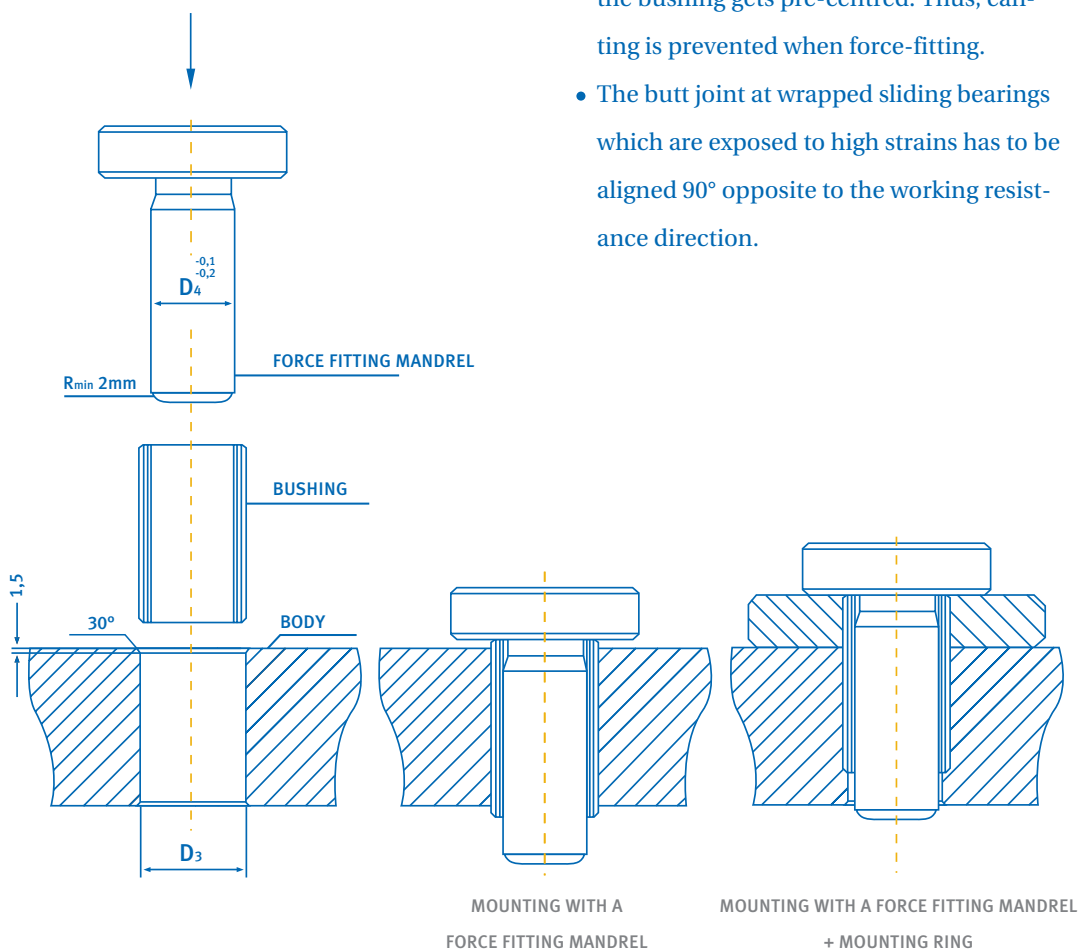

D_2	Inner diameter mounting ring
D_3	Diameter housing
D_4	External diameter force fitting mandrel

