


All tolerances according to KRAMP-norm • Unless stated otherwise • If in doubt please ask						
Above	-	6	30	120	400	1000
Up to	6	30	120	400	1000	2500
Tol.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2

All diameters	Stroke
⊙ ∅ 0.1 A	Tol. +1.8 -1.6

Angles ± 2° Drilled holes +0.25 -0
All sharp edges removed R0.2 +0.2
Inside and Outside deburred
Surface roughness max. Ra 3.2

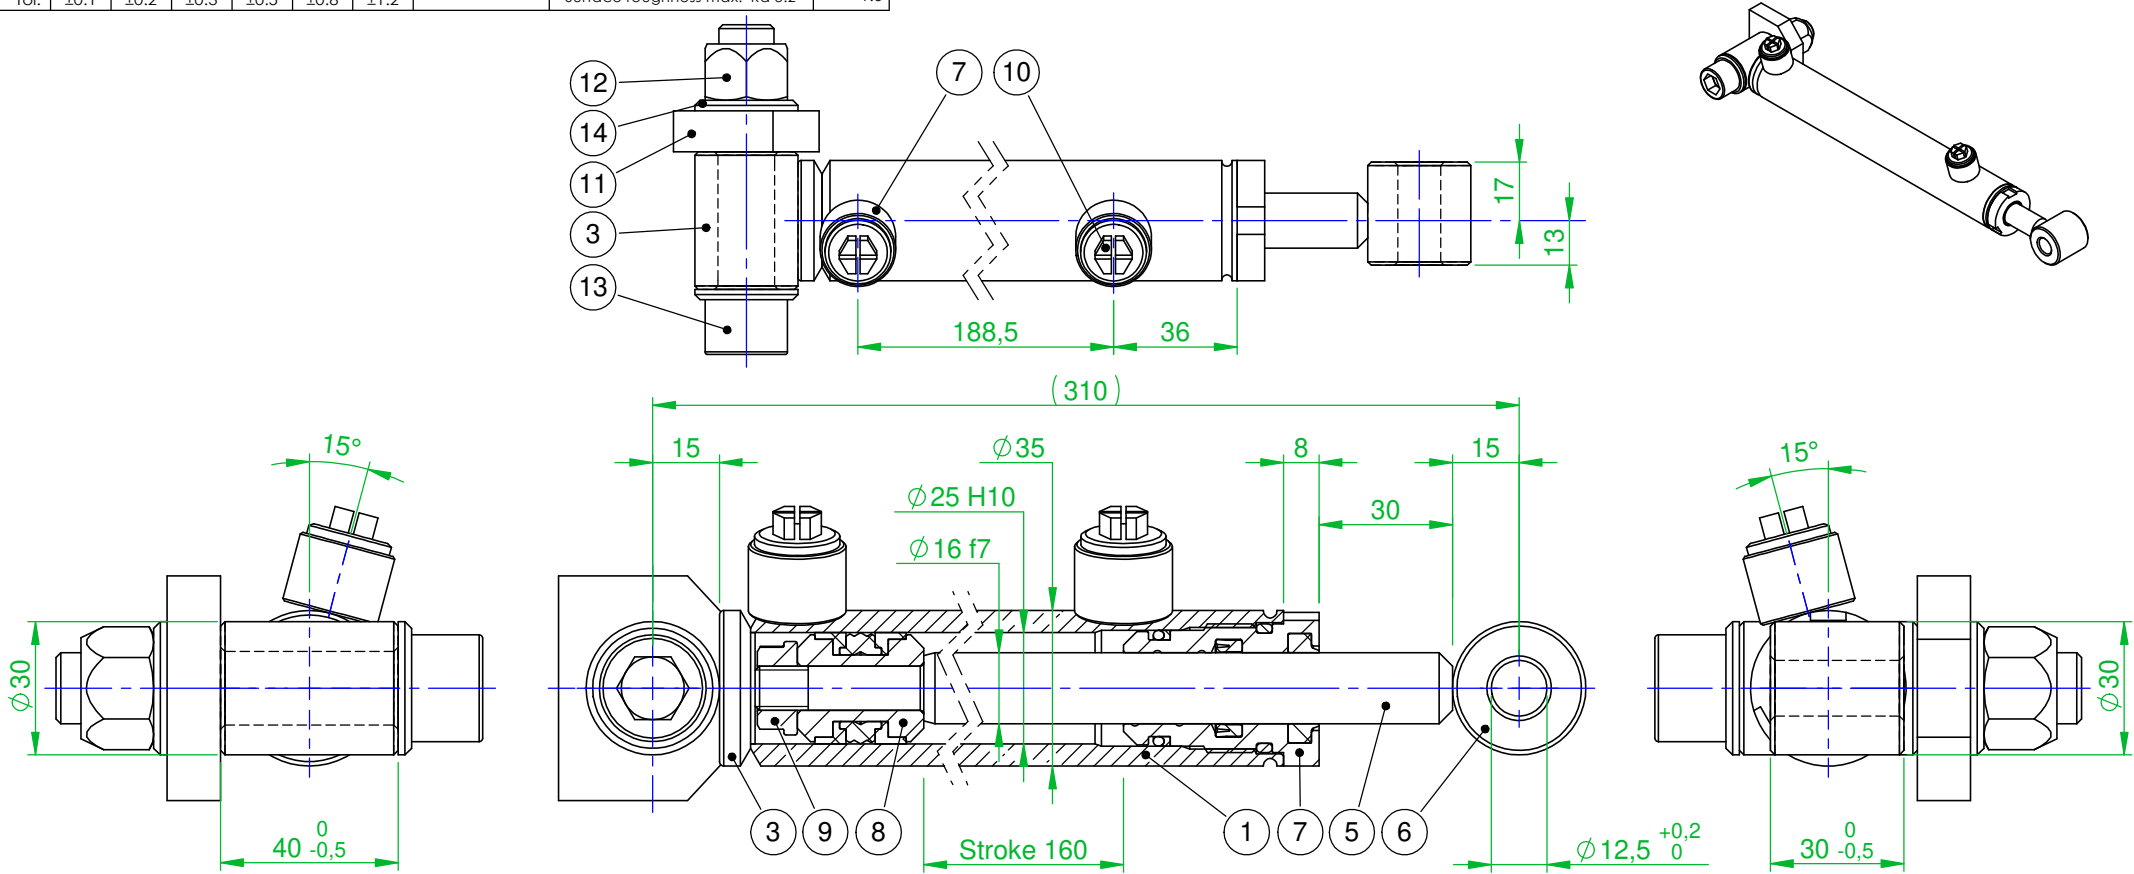

POS.	PARTNO	DESCRIPTION	QTY.
1	MDL-086549	Tube - Cylinder tube 35 x 25 ST52-H10 CB 35-5H10 L=0,235	1
2	LSN04E	Welding-stud 1/4" BSP	2
3	DC3902501	Endcap C2/C3/P2 - Bore 25	1
4	MDL-086546	Bush 30 x 16,5 L=40	1
5	MDL-086552	Rod - Hard Chrome Shaft 16 - HAC16 L=0,272	1
6	MDL-086545	Bush 30 x 12,5 L=30	1
7	DS2902513016VM	Cylinder-head C2 - Bore 25 - Rod 16 - pre-assembled	1
8	DS2902504VM	Cylinder-piston C2 - Bore 25 - pre-assembled	1
9	SLBMM1015	Seallock-nut M10x1.5 ∅25mm	1
10	SPO4M	Dust plug outer thread 1/4" BSP	2
11	MDL-087070	Strip / PL50x12 - Length: 42mm	1
12	98516	Hexagon lock nut DIN985 M16x2. 985.16	1
13	9121680	Hexagon socket head cap screw 912.1680	1
14	125A16	Flat washer M16, zinc-plated 125A.16	2

Engrave Codification
KRAMP + Purchase order Supplier number + Week/Year
Additional:
Remark:

Item	DWG-056589 - C2S.25.16.160[C2]		Revision	C2
Description	C2S.25.16.160 Bush/30~Bush/30			
Comment				
Finish	Primer	Weight	2.21 kg	
	Drawn	07-06-2019 - D. Smeitink		
	Pressure	250 Bar	Ref.	