

Receiver

Company
Reference
Address
Phone
Fax
E-mail

From

Item no. **Customer pos. no.:**

60183505

Model:

ESYBOX MINI 3 - KIWA

Pump data

Pressure rating : 0,75 MPa
SETTABLE CONSTANT PRESSURE FROM 0,1 TO 0,55 MPa
Min. fluid temperature : 0 °C
Max. fluid temperature : 40 °C
Max. Temperature operating : 50 °C

Requested data

Flow :
Head :
Fluid : Water
Fluid Temperature : 20 °C
Density: 998,3 kg/m³
Kinematic viscosity: 1,005 mm²/s
Dampspanning: 0,00 MPa


Materials

Motor liner Stainless Steel AISI 304
O-Ring NBR
Mechanical seal Impregnated carbon-resin/Ceramic/NBR
Plugs PA 6.6 30% FV / PP OMO 30% FV
Suction body PP OMO 30% GF
Insert Brass
Spring AISI 303
Diffuser Noryl
Impeller Noryl
Discharge section PP OMO 30% GF
Non-return valve Technopolymer/Rubber/Steel
Tank Technopolymer/Rubber
Pressure sensor body Technopolymer
& MOTOR BODY PP OMO 30% GF
Seal disk PA 6.6 30% GF
Selfpriming shutter POM
Heat sink Brass
Flowmeter wheel POM

Motor data


Power input P1 0,85 kW
Rated speed: 3.000 1/min
Rated voltage : 1~ 220-240 V 50 Hz
Nominal current : 4,8 A
Degree of protection : IP X4

Curve tolerance according to ISO 9906

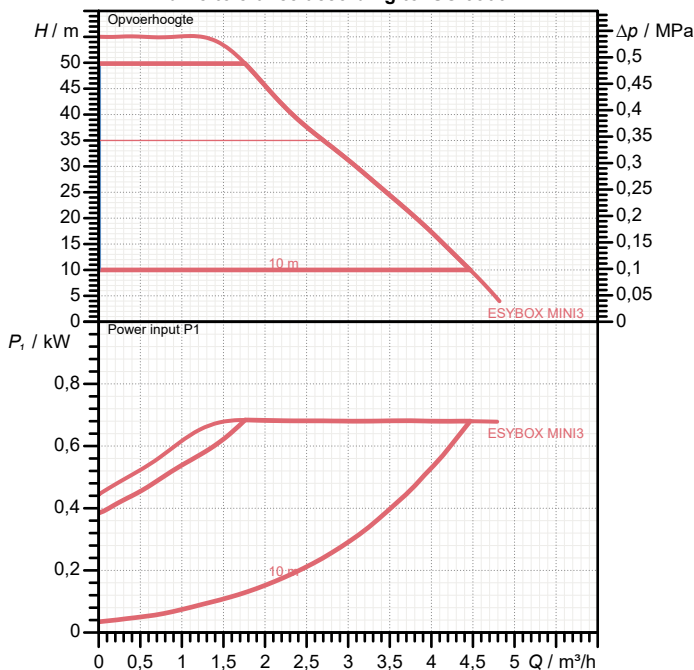

Hydraulic data (duty point)

Flow :
Head :

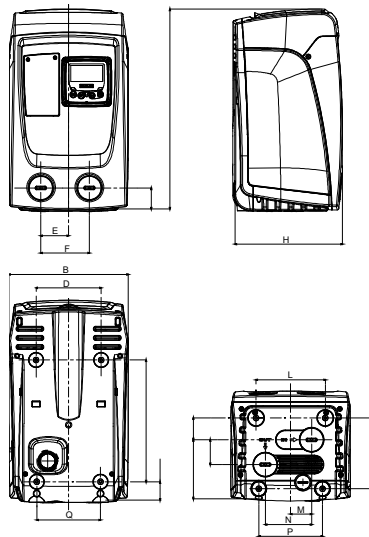

Dimension mm

A	439	G	279,5	P	140		
B	263	H	236	Q	140		
C	46	I	40,5	R	155,5		
D	143	L	152	S	47,8		
E	60,7	M	46	T	133		
F	106,7	N	101,7	V	54,5		

Gewicht: 14,6 kg

Pump connection

Suction side 1" G / 0,75 MPa
Discharge side 1" G / 0,75 MPa


Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

ESYBOX MINI 3 - KIWA

Curve tolerance according to ISO 9906

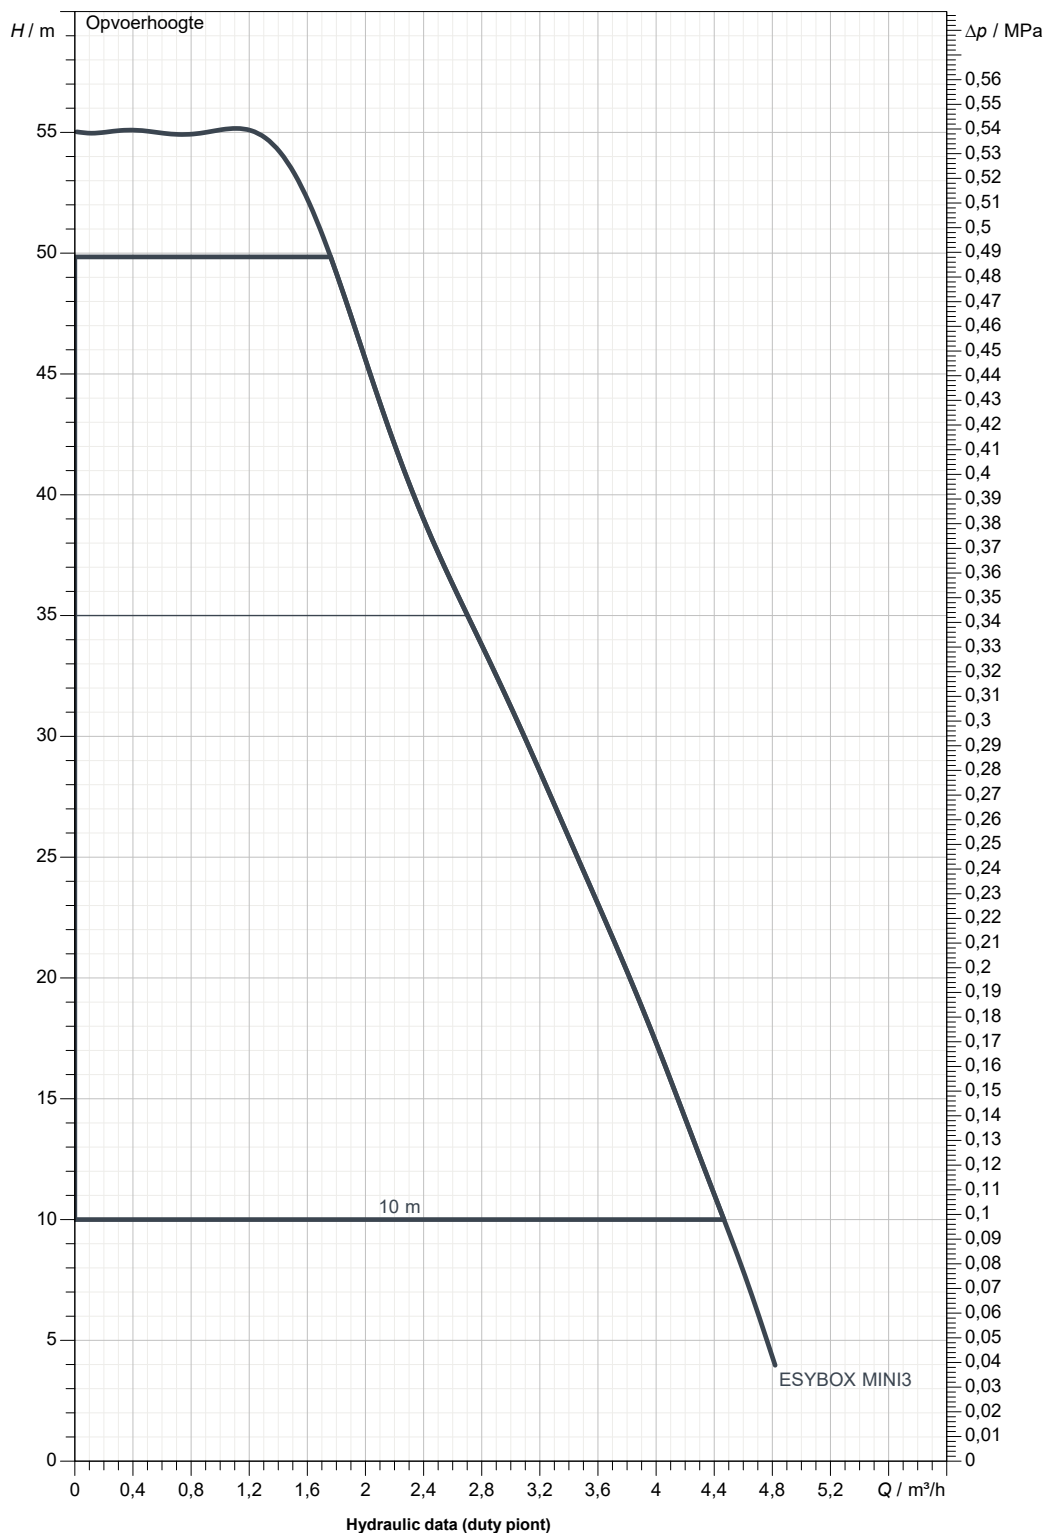

Suction side
1" G
0,75 MPa

Discharge side
1" G
0,75 MPa

Flow :

Head :

Rated speed:
3.000 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IT

OWNER_

ISSUE_DATE

05/07/23



DIMENSIONAL DRAWING

05/07/23

Pagina 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Company
Reference
Address
Phone
Fax
E-mail

ESYBOX MINI 3 - KIWA

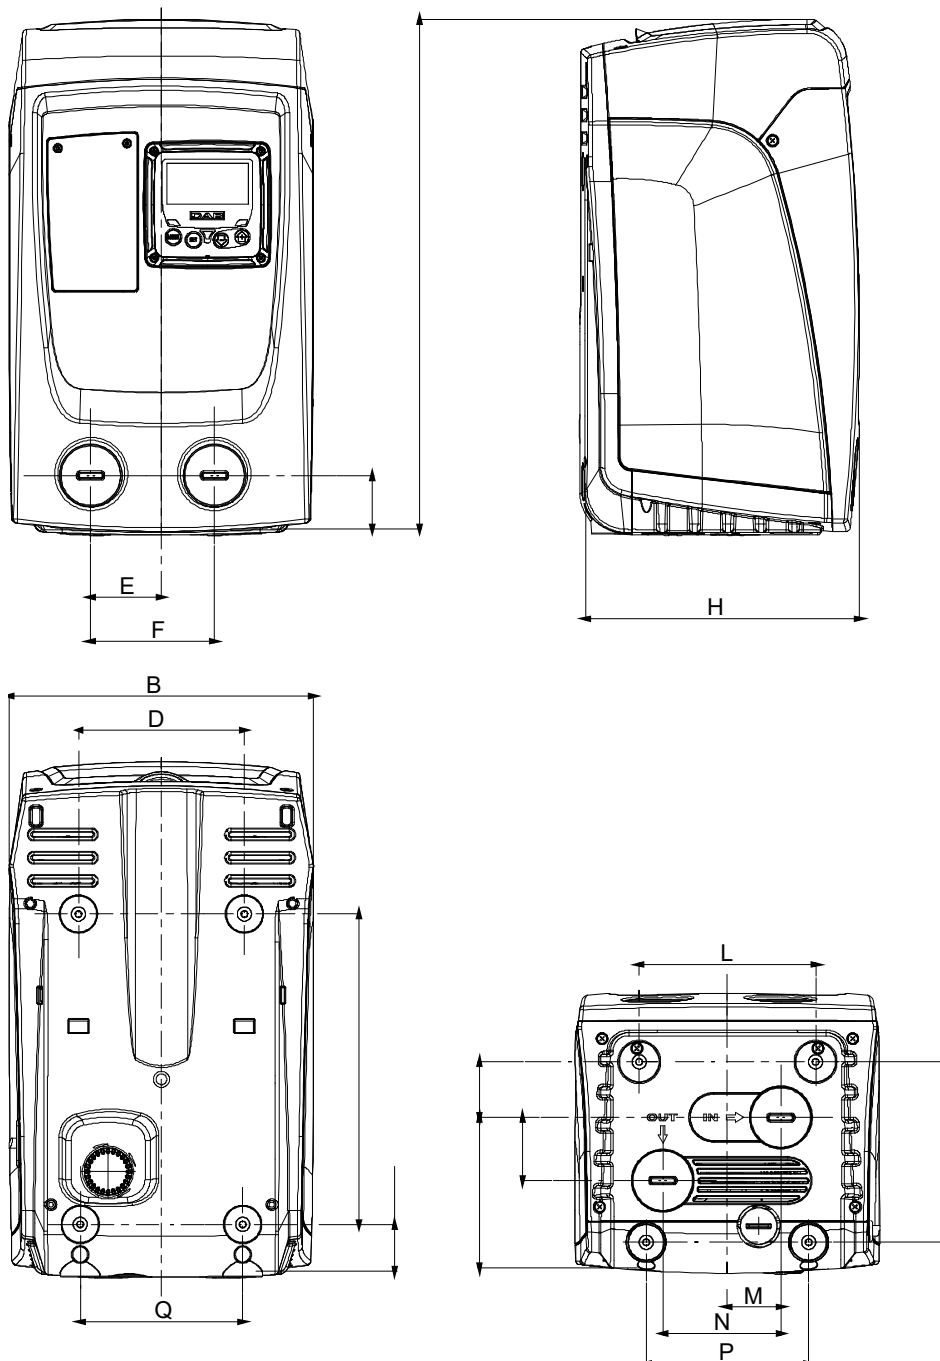

Dimensions in mm

Pump connection

1	A	439	P	140			
2	B	263	Q	140			
3	C	46	R	155,5			Suction
4	D	143	S	47,8			1" G
5	E	60,7	T	133			0,75 MPa
6	F	106,7	V	54,5			
7	G	279,5					Discharge
8	H	236					1" G
9	I	40,5					0,75 MPa
10	L	152					
11	M	46					
12	N	101,7					

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_IC

OWNER_

ISSUE_DATE

05/07/23