

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60153572.

Model :

NOVA UP 300 M-AE

Pump data

Free passage : 10 mm

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Technopolymer

Impeller Technopolymer



OR ring NBR

Motor top body Stainless Steel AISI 304

Rotor shaft AISI 416 X12 CrS 13 UNI EN 10088-1

V-RING NBR

Suction strainer Technopolymer

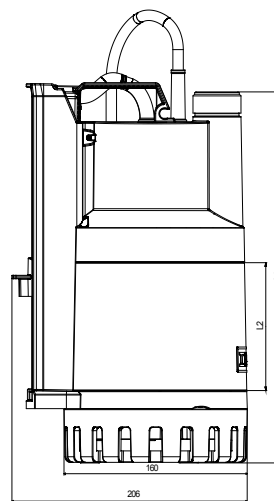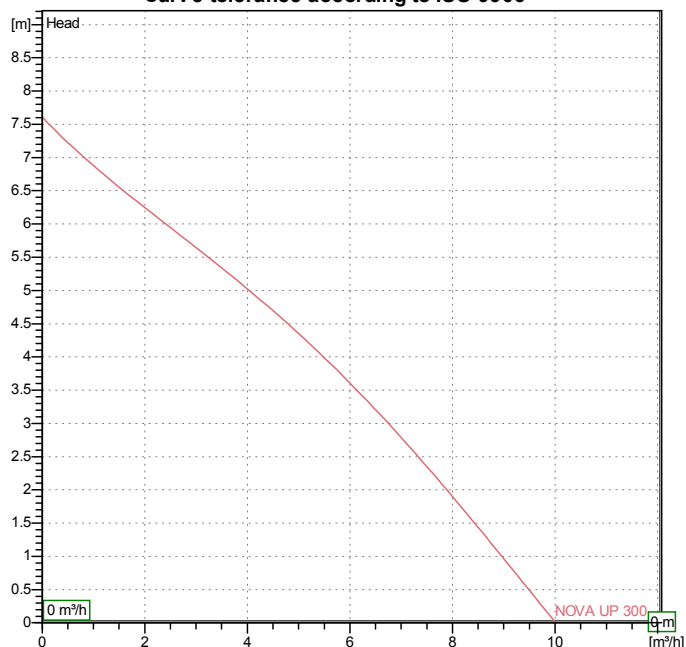Curve tolerance according to ISO 9906

Motor data
Weight : 5.8 kg

Motor brand : DAB

Nominal power P2 : 0.21 kW

Rated speed : 2850 rpm

Rated voltage : 1~ 220-240 V

50 Hz

Nominal current : 1.5 A

Degree of protection : IP 68

Dimensions in mm

L1	296.2				
L2	75.9				

Pump connection

Suction side : /
Discharge side : 1 " 1/4 G / --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

NOVA UP 300 M-AE

Curve tolerance according to ISO 9906

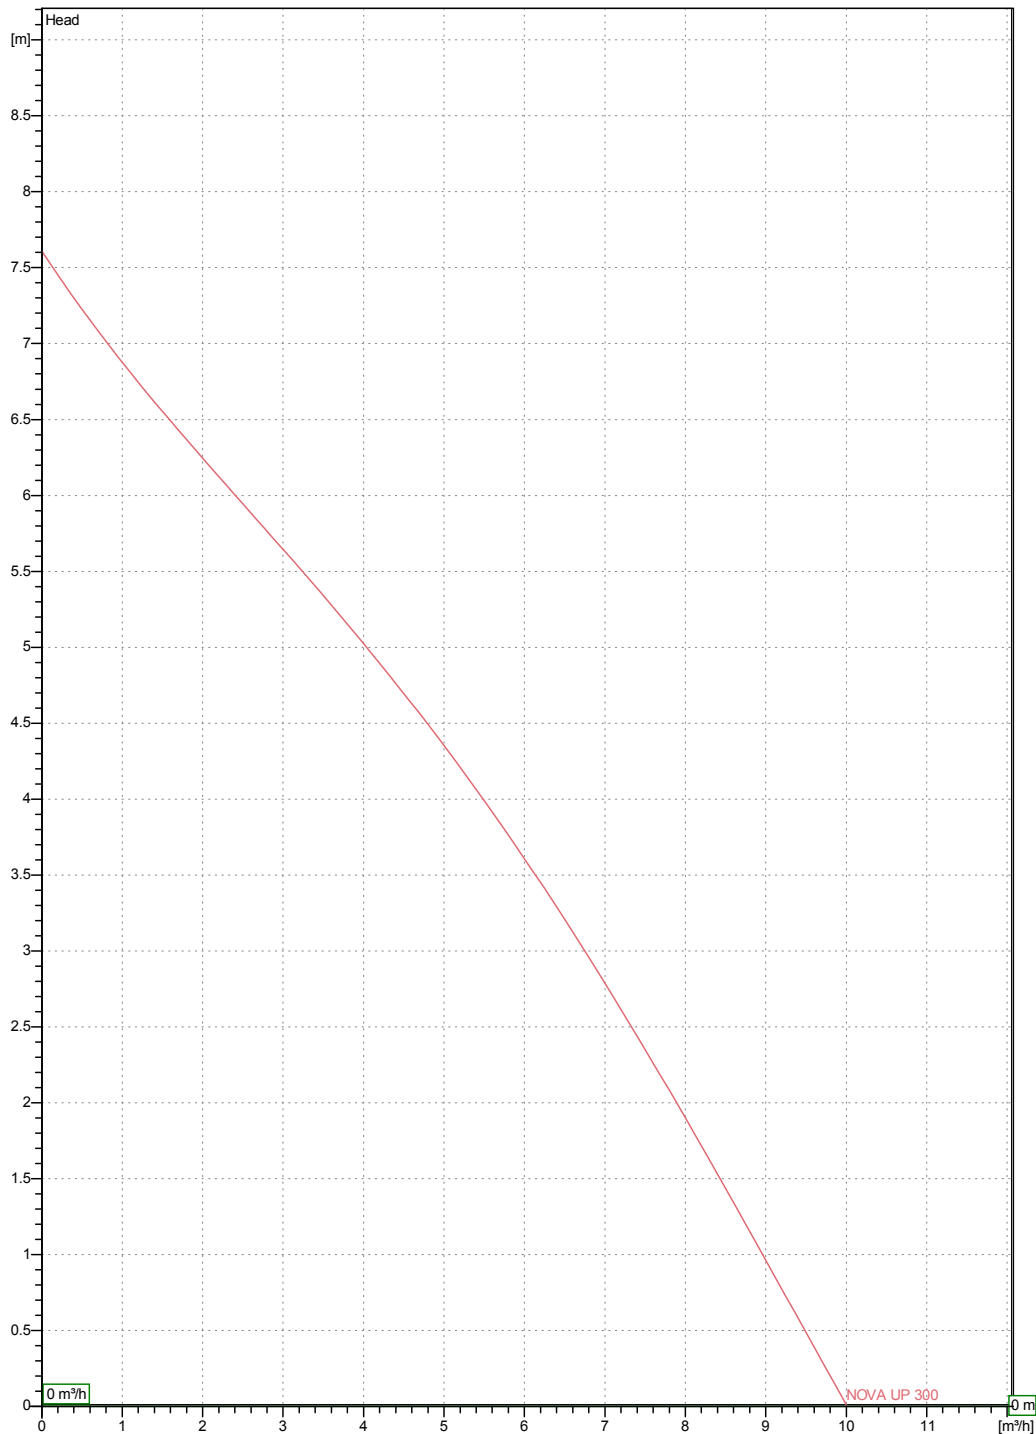


Hydraulic data (duty point)

Suction side :	Discharge side : 1 " 1/4 G --	Flow : 0 m³/h	Head : 0 m	Rated speed : 2850 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Society
Reference
Address
Phone
Fax
E-mail

NOVA UP 300 M-AE

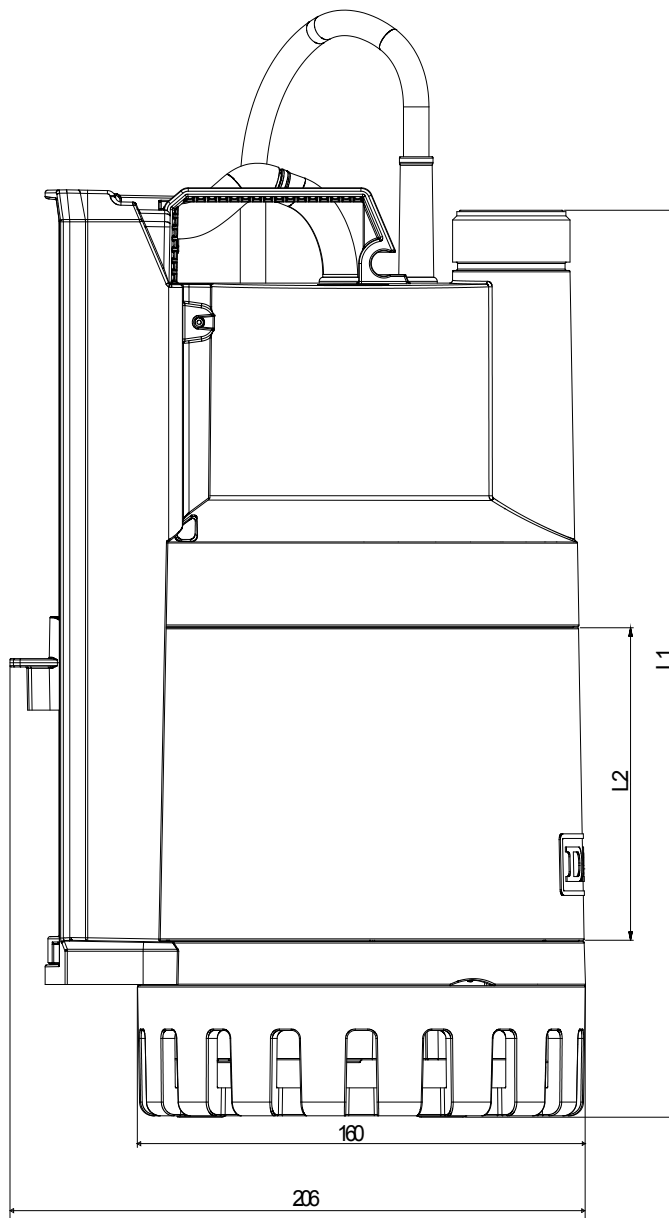

Dimensions in mm

Pump connection

1 L1 296.2
2 L2 75.9

Suction

Discharge
1 " 1/4 G
-

Project

Project ID

Created by

Created on

24/03/2016