

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122636

Model :

VERTY NOVA 200 M

Pump data

Free passage : 5 mm
Pressure rating :
Min. fluid temperature :
Max. fluid temperature :
Max. Ambient temperature :

Requested data

Flow : 0 m³/h
Head : 0 m
Fluid : Water, pure
Fluid Temperature : 20 °C
Density : 998.3 kg/m³
Kinematic viscosity : 1.005 mm²/s
Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :
Head :




Materials

Pump body Technopolymer
Impeller Noryl
Motor casing Stainless Steel AISI 304
Motor shaft AISI 416 X12 CrS 13 UNI EN 10088-1
Float Technopolymer
OR ring NBR 70
Filter Technopolymer

Motor data

Motor brand : DAB
Nominal power P2 : 0.2 kW
Rated speed : 2800 rpm
Rated voltage : 1~ 220-240 V
Nominal current : 1.3 A
Degree of protection : IP X8

50 Hz

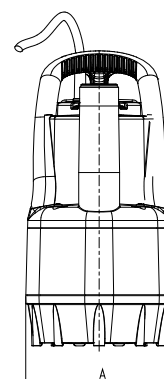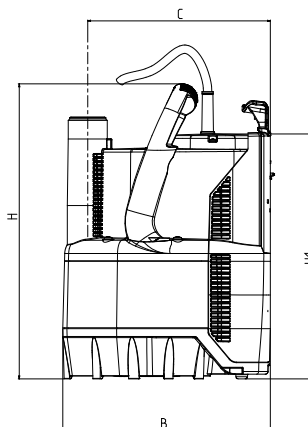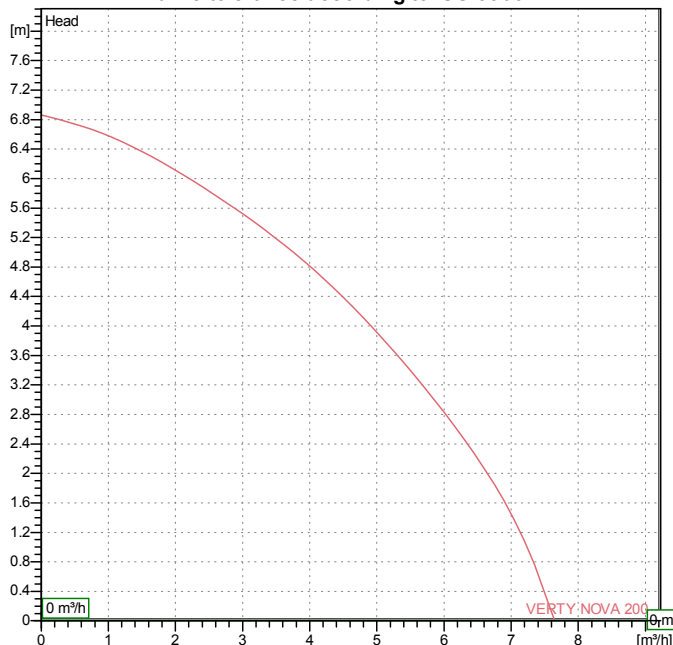Curve tolerance according to ISO 9906

Weight : 4.2 kg

Dimensions in mm

A	158				
B	225				
C	200				
D	33				
H	318				
H1	265				

Pump connection

Suction side : /
Discharge side : /


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

VERTY NOVA 200 M

Curve tolerance according to ISO 9906

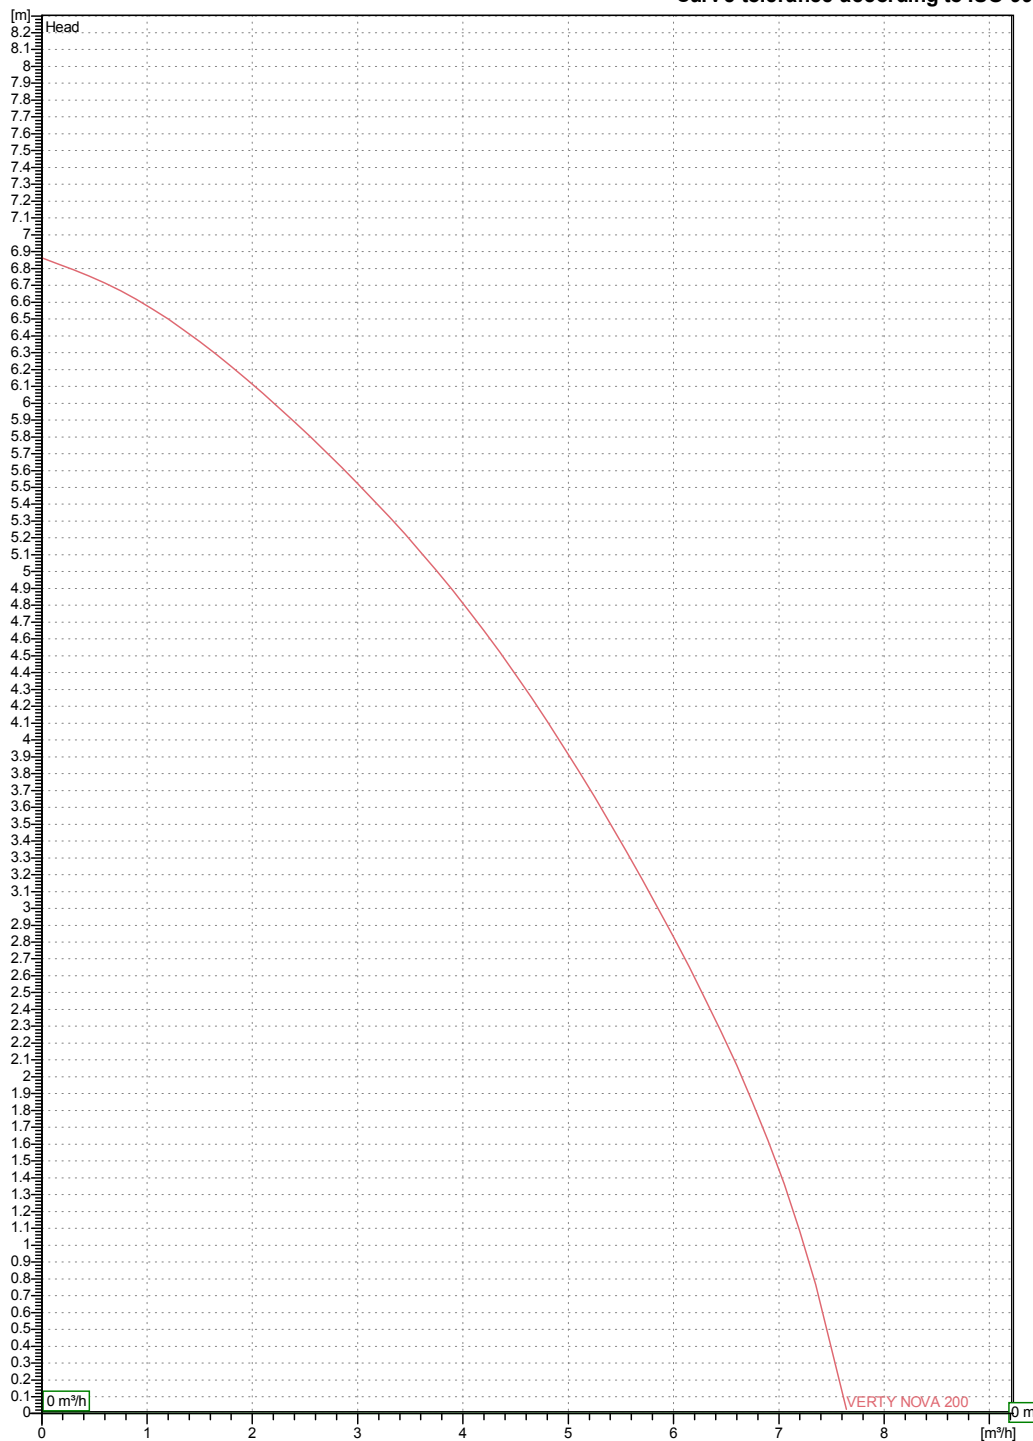

Hydraulic data (duty point)



Suction side :	Discharge side :	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

VERTY NOVA 200 M

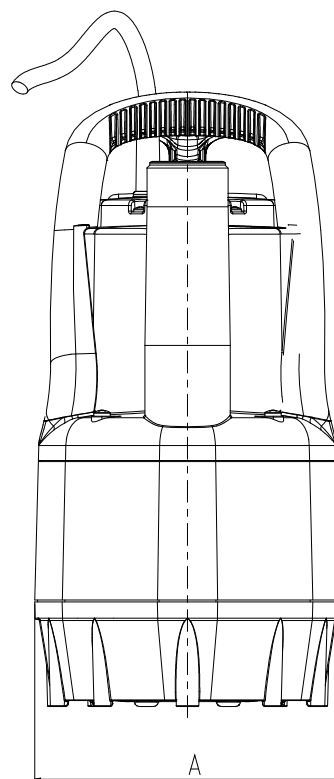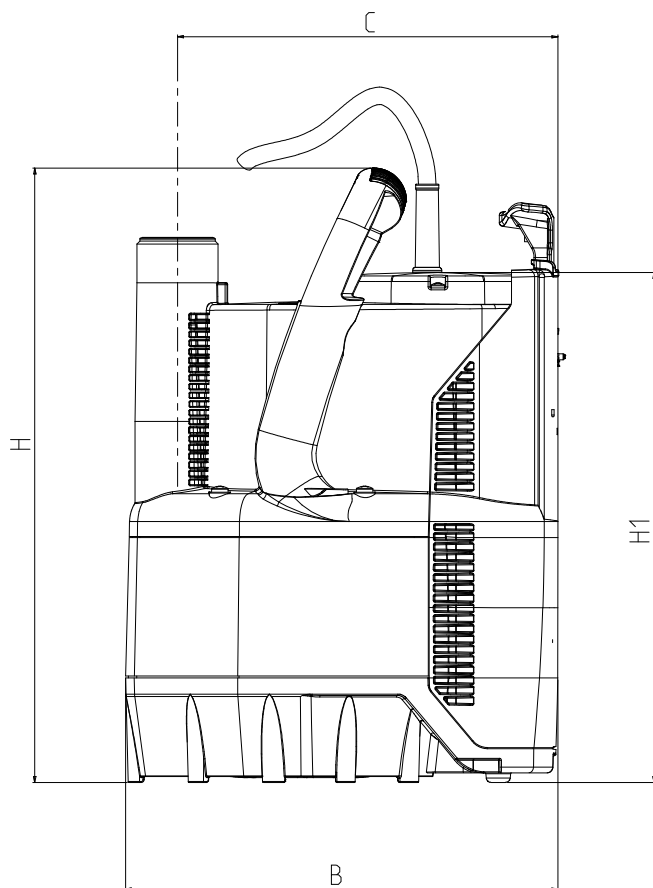

Dimensions in mm

Pump connection

1	A	158
2	B	225
3	C	200
4	D	33
5	H	318
6	H1	265

Suction

Discharge

Project

Project ID

Created by

Created on

24/03/2016