

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

103040140

Model :

FEKA VS 1200 T - NA

Pump data

Free passage : 50 mm

Pressure rating :

Min. fluid temperature : 0

Max. fluid temperature : 50 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body Stainless Steel (AISI 304)

Impeller Stainless Steel (AISI 304)



Motor shaft AISI 316

Seal disk Stainless Steel (AISI 304)

Motor casing Stainless Steel (AISI 304)

Protection cover Stainless Steel (AISI 304)

Mechanical seal pump side Silicon carbide/Silicon carbide

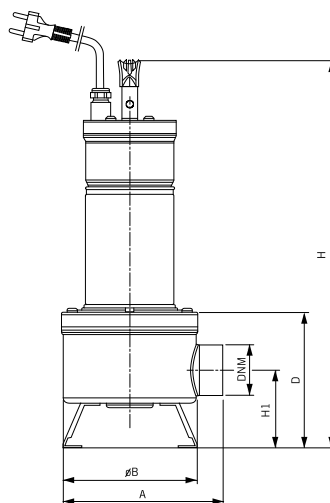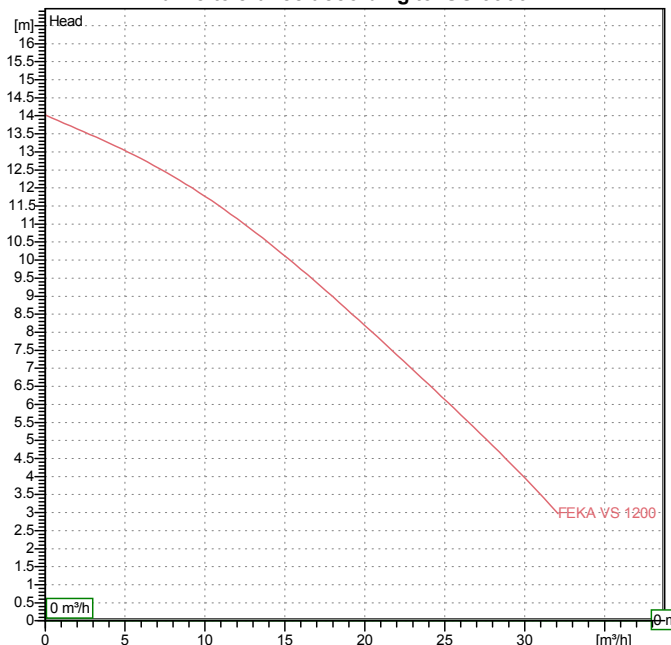Curve tolerance according to ISO 9906

Motor data
Weight : 20.8 kg

Motor brand : DAB

Nominal power P2 : 1.2 kW

Rated speed : 2800 rpm

Rated voltage : 3~ 400 V

Nominal current : 3.44 A

Degree of protection : IP 68

50 Hz

Dimensions in mm

A	203				
B	170				
D	172				
DNM	2" F				
H	537				
H1	98				

Pump connection

Suction side : /

Discharge side : 2 " F / --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

FEKA VS 1200 T - NA

Curve tolerance according to ISO 9906

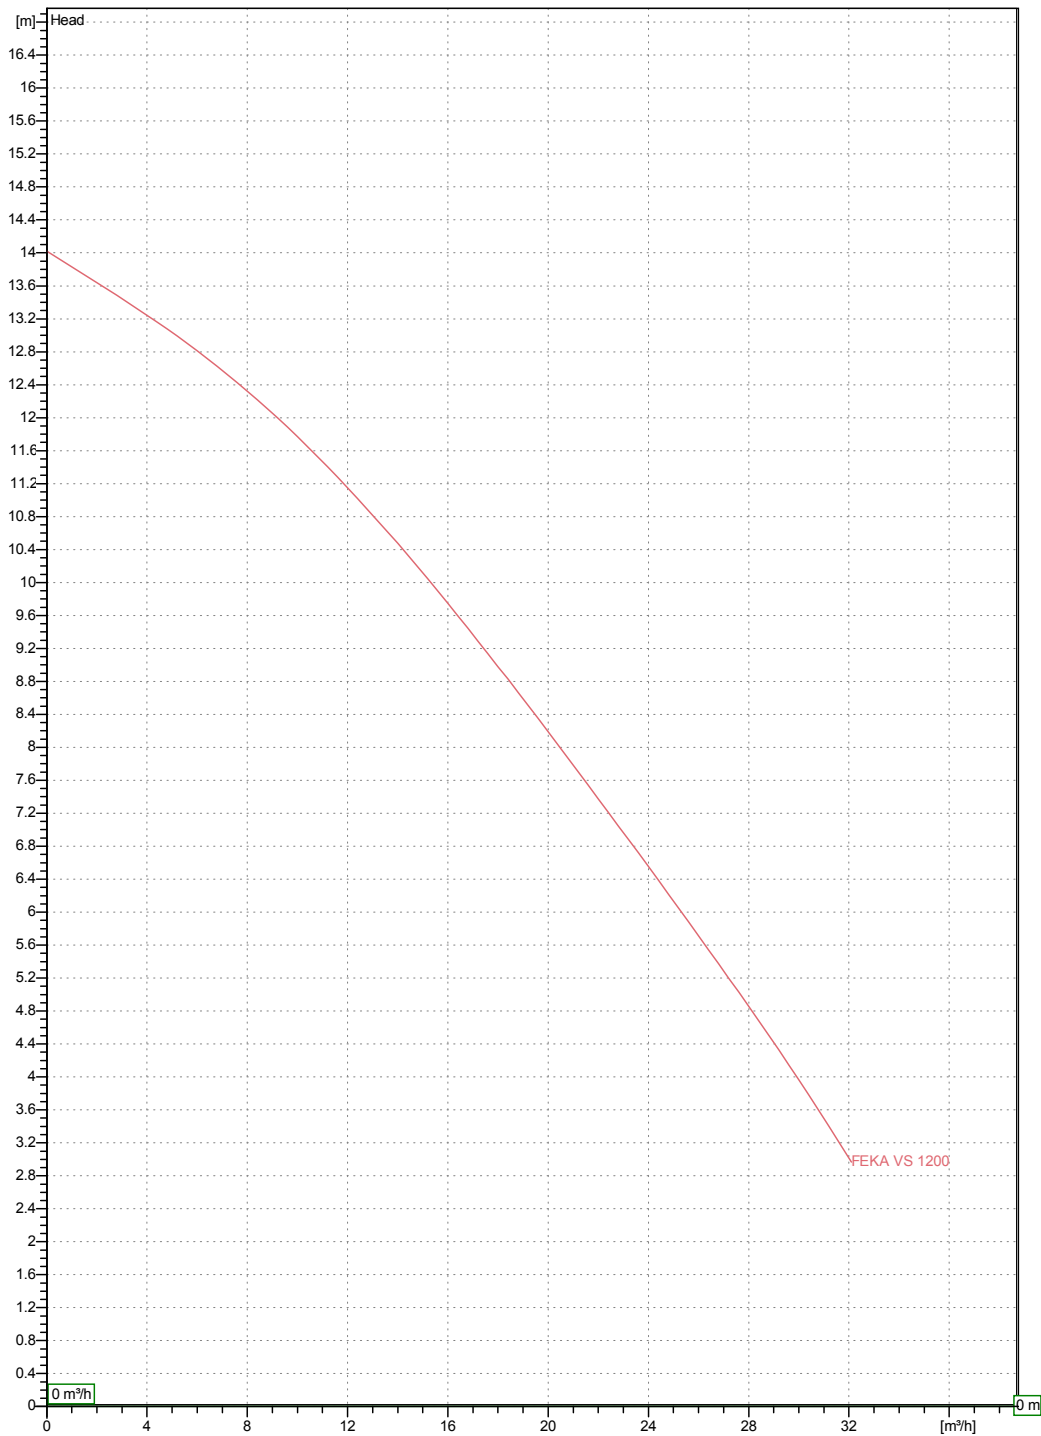

Hydraulic data (duty point)


Suction side :	Discharge side : 2 " F --	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Society
Reference
Address
Phone
Fax
E-mail

Receiver

From

FEKA VS 1200 T - NA

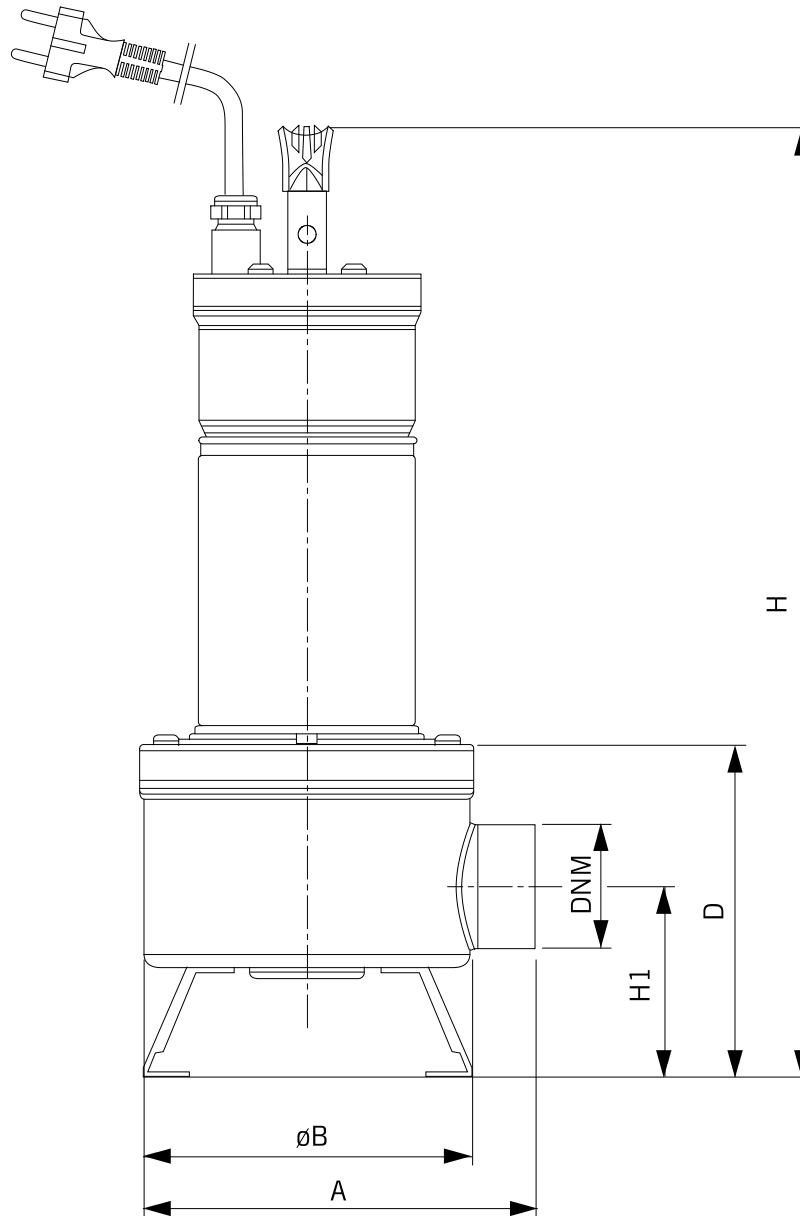

Dimensions in mm							Pump connection	
1	A	203					Suction	
2	B	170						
3	D	172						
4	DNM	2" F					Discharge 2 " F --	
5	H	537						
6	H1	98						
Project			Project ID			Created by		Created on 24/03/2016