

Receiver
From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

103041020

Model :

DRENAG 1000 T-NA

Pump data

Free passage : 10 mm

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature : 40 °C

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Pump body AISI 304 X5 Cr Ni 1810 UNI 6900/71

Impeller AISI 304 X5 Cr Ni 1810 UNI 6900/71


Motor shaft AISI 316 X5CrNiMo 1712 - UNI 6900/71

Disc seal AISI 304 X5 Cr Ni 1810 UNI 6900/71

Filter AISI 304 X5 Cr Ni 1810 UNI 6900/71

Mechanical seal pump side Silicon carbide/Silicon carbide

Pump liner AISI 304 X5 Cr Ni 1810 UNI 6900/71

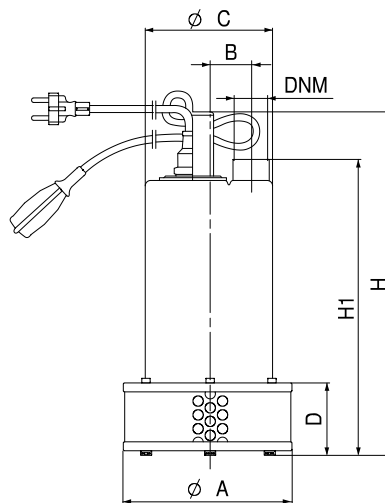Curve tolerance according to ISO 9906

Motor data
Weight : 17 kg

Motor brand : DAB

Nominal power P2 : 1 kW

Rated speed : 2800 rpm

Rated voltage : 3~ 400 V

Nominal current : 2.43 A

Degree of protection : IP 68

50 Hz

Dimensions in mm

A	215				
C	175				
D	71				
DNM	1" 1/2 F				
H	413				
H1	385				

Pump connection

Suction side : /

Discharge side : 1" 1/2 / --


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DRENAG 1000 T-NA

Curve tolerance according to ISO 9906

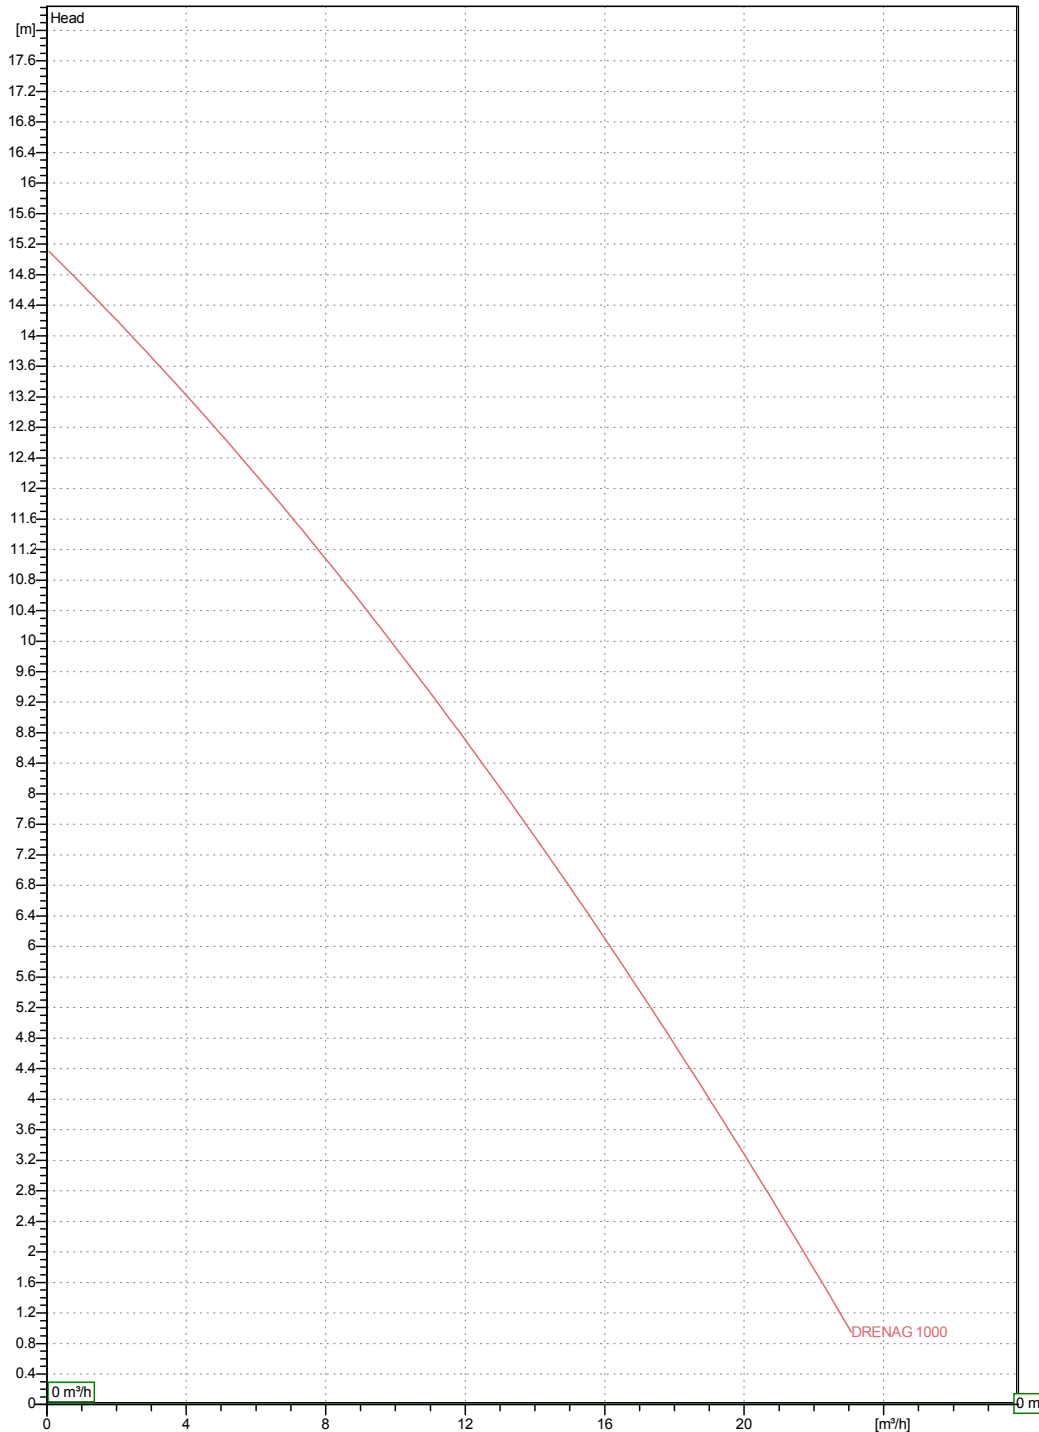


Hydraulic data (duty point)

Suction side :	Discharge side : 1 " 1/2 --	Flow : 0 m³/h	Head : 0 m	Rated speed : 2800 rpm
Project	Project ID	Created by	Created on 24/03/2016	

Society
Reference
Address
Phone
Fax
E-mail

DRENAG 1000 T-NA

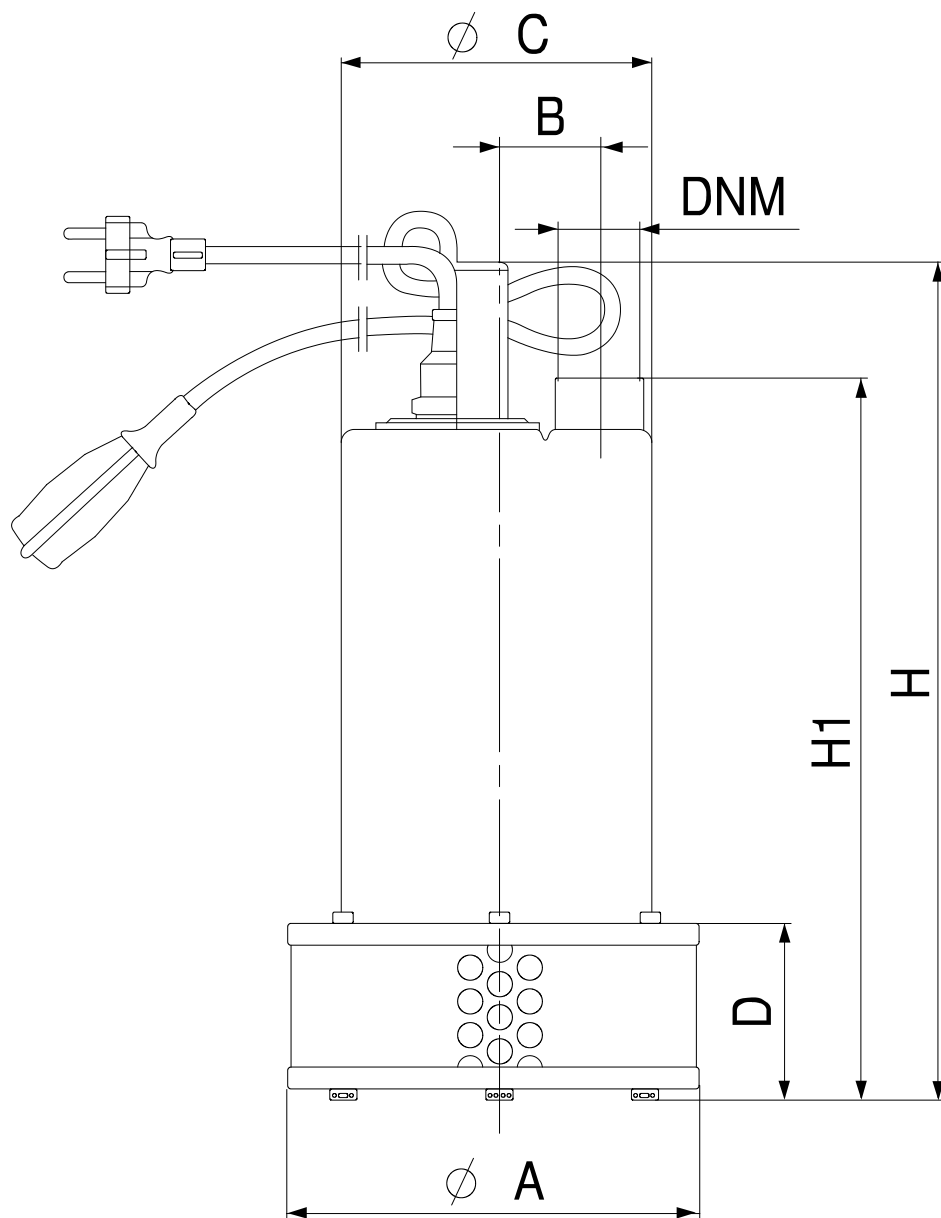

Dimensions in mm

Pump connection

1	A	215
2	C	175
3	D	71
4	DNM	1" 1/2 F
5	H	413
6	H1	385

Suction

Discharge
1 " 1/2
-

Project

Project ID

Created by

Created on

24/03/2016