



NEW

The product shown may differ from standard configuration.

PRIMO® L PLUS

Standard Seat with Pneumatic Suspension



PRIMO® L PLUS

Technical data

Standard seat

The new Primo L Plus delights the drivers with a 50 mm broader seat cushion (compared to Primo L). This seat's reduced-travel pneumatic suspension, which runs on a 12 V or 24 V power source, effectively attenuates vibrations in even the tiniest cabs. It can be optimally set to the operator's weight using an ergonomically placed pushbutton, aided by an indicator. The seat meets the latest safety requirements and is equipped with a seat and belt contact switch as well as a duosensitive ELR-belt system with orange belt straps as standard. For this model, seatbelt retractors are available for installation on the left or right side. Additionally, the Primo L Plus features an individually adjustable, mechanical lumbar support.



Features



ARTICLE NO.	PRIMO® L PLUS
Fabric, compressor 12V	1550944
Fabric, compressor 24V	1550945
Imitation leather, compressor 12V	1550942
STANDARD FEATURES	
Shock absorber, nonadjustable	●
Pneumatic suspension with 12 V/24V compressor	●
Suspension stroke, 60 mm	●
1 Height adjustment, 20 mm	●
2 Weight adjustment, pneumatic, 45-170 kg	●
3 Fore/aft adjustment, 210 mm	●
4 Lumbar support, mechanical	●
5 Adjustable backrest angle	●

PRIMO® L PLUS

6	ELR-belt system, duosensitive, orange belt	●
	Belt retractor left	○
	Belt retractor right	○
	Belt buckle with contact switch	●
	Seat cushion width	520 mm
	Operator presence switch (OPS)	●
OPTIONAL FEATURES		
7	Backrest extension, integrated	○
8	Document box	○
9	Armrests, adjustable angle, 60 mm x 320 mm	○
	Fore/aft isolator*	○
10	Seat heating	○
11	Adapter plate for multifunctional armrest	○

* Fore/aft isolator not for earth-moving machinery

Measurements (installation dimensions)

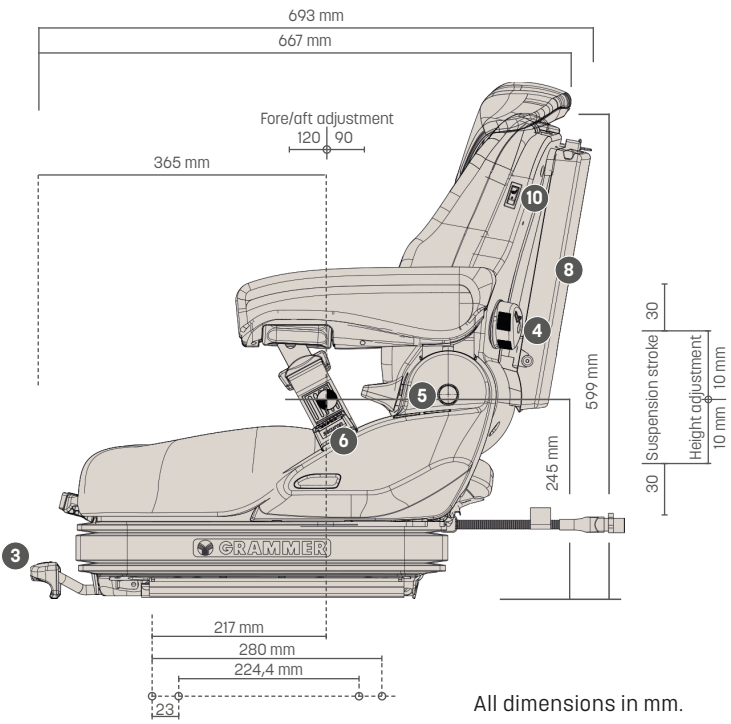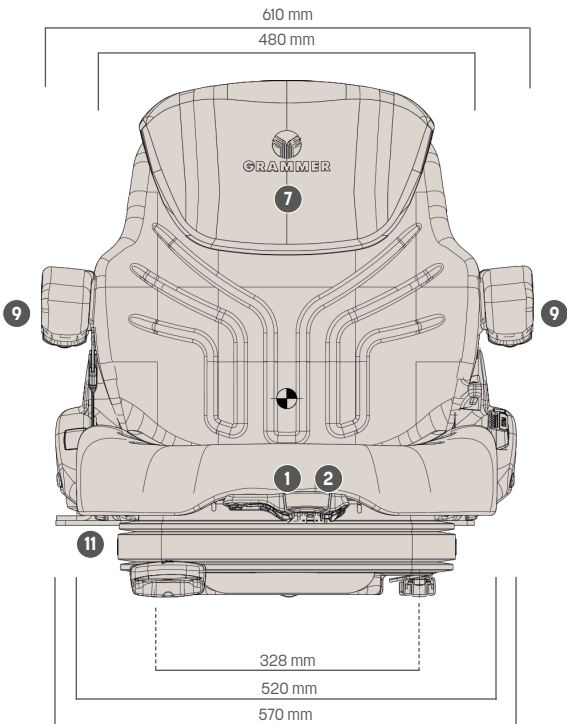

All dimensions in mm.
Subject to technical changes.