



NEW

The product shown may differ from standard configuration.

PRIMO® XM PLUS

Standard Seat with Mechanical Suspension



PRIMO® XM PLUS

Technical data

Standard seat

This model's low-constructed mechanical suspension with 80 mm of travel features an easily accessible ratcheting handle for optimal adjustment to the driver's weight. Safe, ergonomic sitting is also ideally enabled by a new, comfortable 520 mm-wide seat cushion. The seat meets the latest safety requirements and is equipped with a seat and belt contact switch as well as a duosensitive ELR-belt system with orange belt straps as standard. For this model, seat-belt retractors are available for installation on the left or right side. Additionally, the Primo XM Plus features an individually adjustable, mechanical lumbar support.



Features

ARTICLE NO.	
Fabric	1550948
Imitation leather	1550947
STANDARD FEATURES	
Shock absorber, nonadjustable	●
Suspension, mechanical	●
Suspension stroke, 80 mm	●
1 Weight adjustment, manual, 45-170 kg	●
2 Fore/aft adjustment, 210 mm	●
3 Lumbar support, mechanical	●
4 Adjustable backrest angle	●
5 ELR-belt system, duosensitive, orange belt	●

PRIMO® XM PLUS



PRIMO® XM PLUS

Belt retractor left	○
Belt retractor right	○
Belt buckle with contact switch	●
Seat cushion width	520 mm
Operator presence switch (OPS)	●
OPTIONAL FEATURES	
6 Document box	○
7 Armrests, height adjustable, 60 mm x 320 mm	○
Fore/aft isolator*	○
8 Backrest extension, integrated	○
9 Seat heating	○
10 Adapter plate for multifunctional armrest	○

* Fore/aft isolator not for earth-moving machinery

Measurements (installation dimensions)

● STANDARD FEATURES ○ OPTIONAL FEATURES

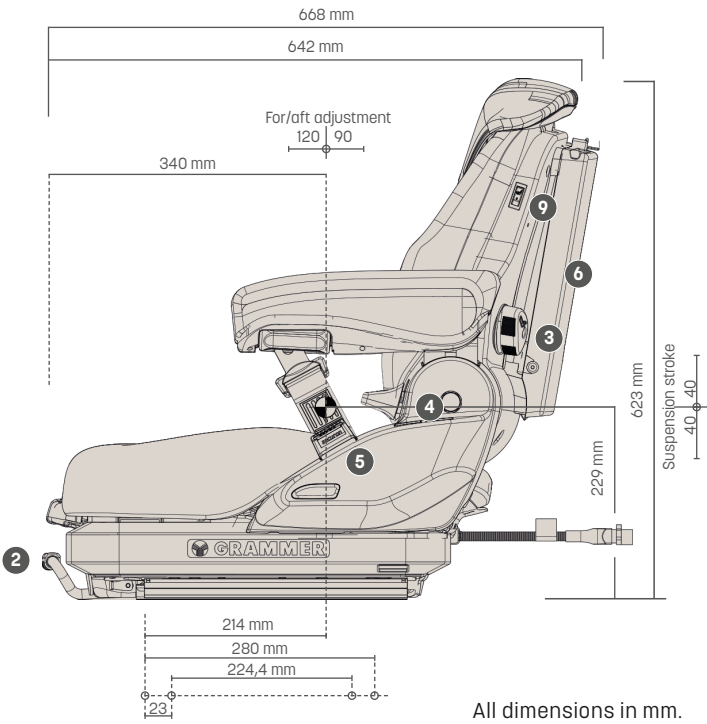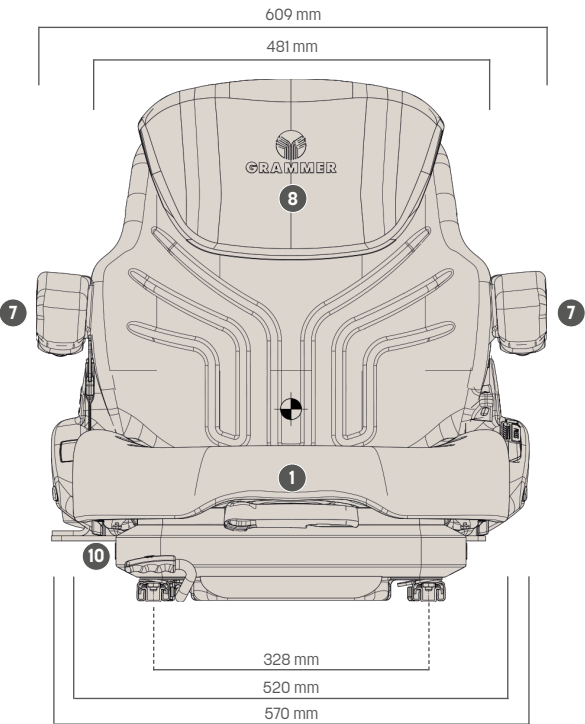

All dimensions in mm.
Subject to technical changes.