


DIN-32895-Ø10x26,5x13,5mm Chain (KG10265A)

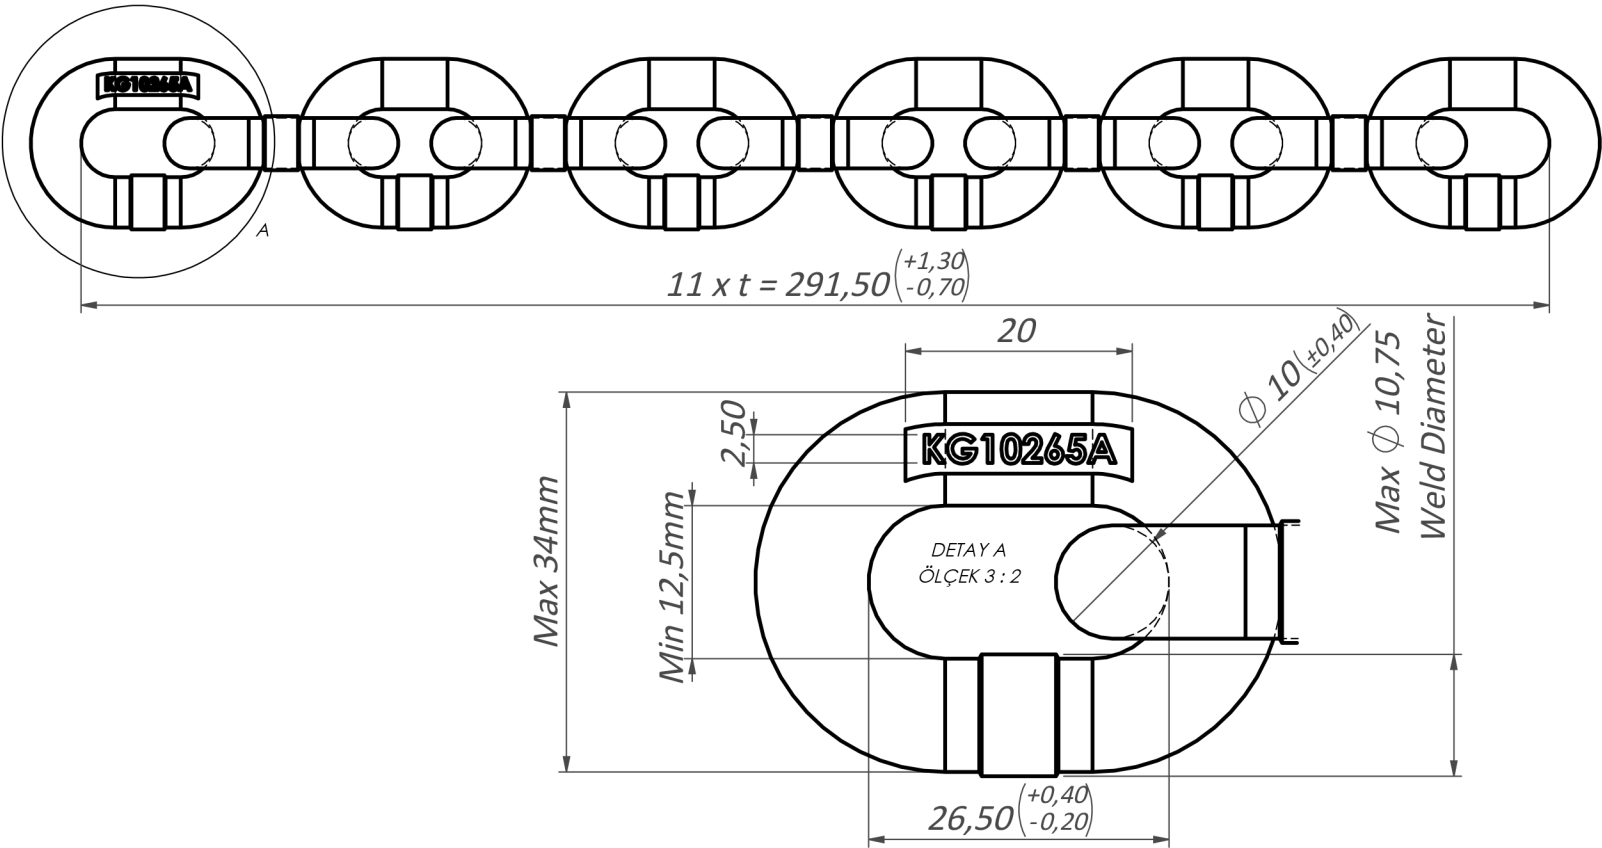

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel	1,007mt - 38link	Min : 1007mm
Standards for manufacturing and testing	DIN -32895		Max : 1010mm
Breaking Force (BF)	Min 112 kN	5,008mt - 189link	Min :5008,5mm
Manufacturing Proof Force (MPF)	71 kN	9,990mt - 377-378link	Max : 5023,5mm
			Min : 9990,5mm
		24,989mt - 943-945link	Max : 10020,5mm
Working Load Limit (WLL)	Max 28 kN	50,005mt - 1887-1892link	Min : 24989,5mm
			Max : 25064,5mm
Ultimate Elongation (A)	% 10 min	100,011mt - 3774-3785link	Min : 50005,5mm
Bend Deflection (f)	8mm Min		Max : 50155,5mm
			Min : 100011mm
			Max : 100311mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.