


DIN-32895-Ø10x28x13,5mm Chain (KG1028A)

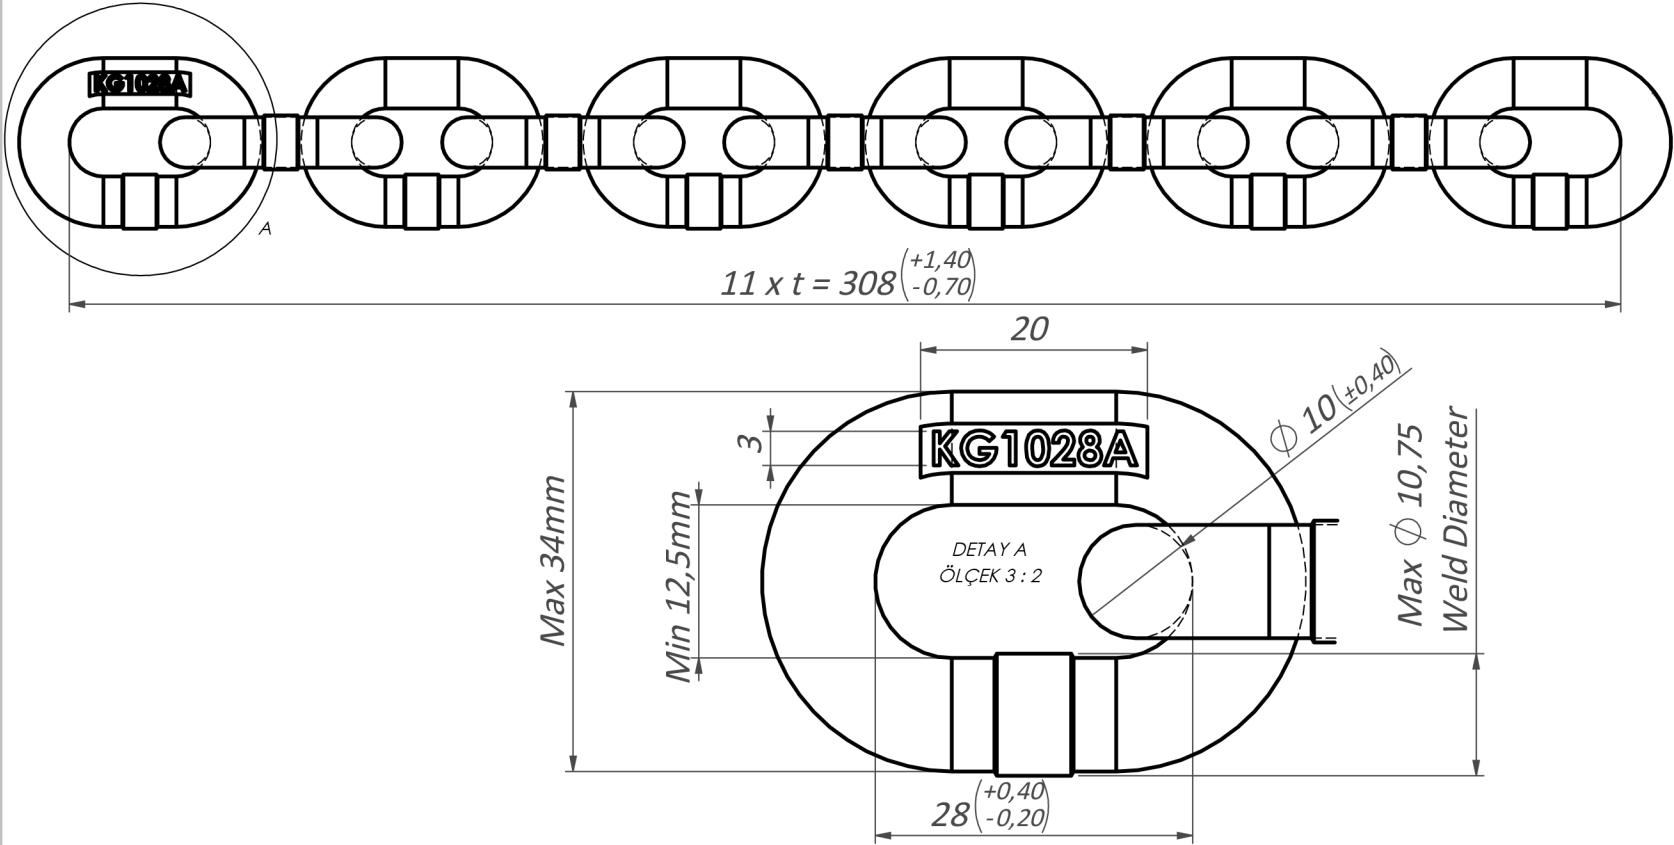

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel	1,008mt - 36link	Min : 1008mm
Standards for manufacturing and testing	DIN -32895		Max : 1011mm
Breaking Force (BF)	Min 112 kN	5,012mt - 179link	Min :5012mm
			Max : 5027mm
Manufacturing Proof Force (MPF)	71 kN	9,996mt - 357-358link	Min : 9996mm
			Max : 10026mm
Working Load Limit (WLL)	Max 28 kN	25,004mt - 893-895link	Min : 25004mm
			Max : 25079mm
Ultimate Elongation (A)	% 10 min	50,008mt - 1786-1791link	Min : 50008mm
			Max : 50158mm
Bend Deflection (f)	8mm Min	99,988mt - 3571-3581link	Min : 99988mm
			Max : 100288mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.