
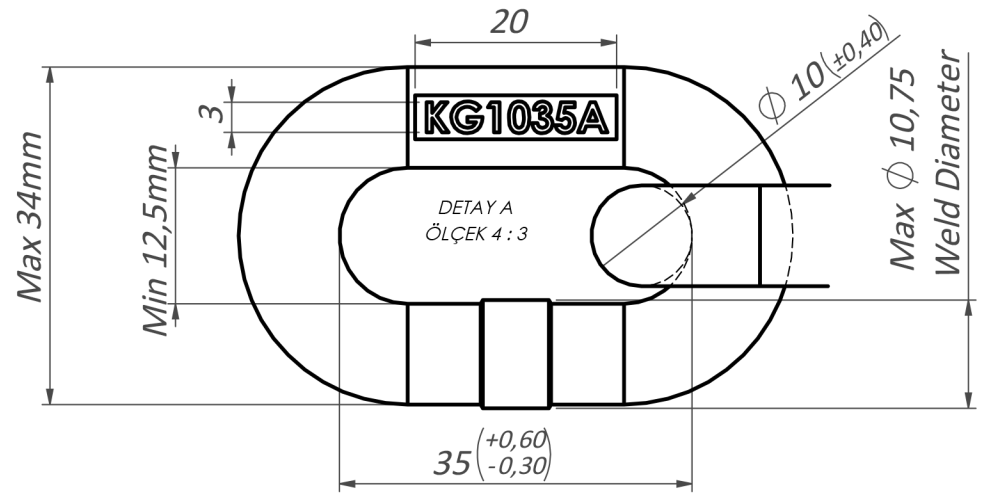


DIN-32895-Ø10x35x13,5mm Chain(KG1035A)

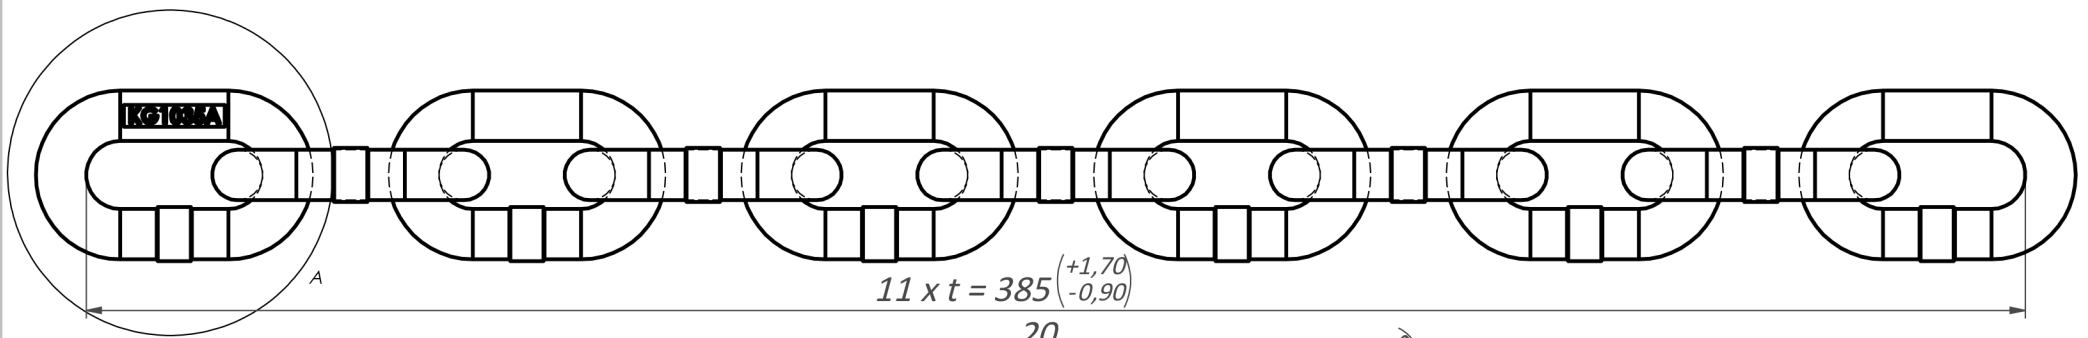

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel		
Standards for manufacturing and testing	DIN -32895	1,015mt - 29link	Min : 1015mm Max : 1018mm
Breaking Force (BF)	Min 112 kN	5,005mt - 143link	Min : 5005mm Max : 5020mm
Manufacturing Proof Force (MPF)	71 kN	10,010mt - 286link	Min : 10010mm Max : 10040mm
Working Load Limit (WLL)	Max 28 kN	24,990mt - 714-716link	Min : 24990mm Max : 25065mm
Ultimate Elongation (A)	% 10 min	50,015mt - 1429-1433link	Min : 50015mm Max : 50165mm
Bend Deflection (f)	8mm Min	99,995mt - 2857-2865link	Min : 99995mm Max : 100295mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.