


DIN-32895-Ø10x38x13,5mm Chain(KG1038A)

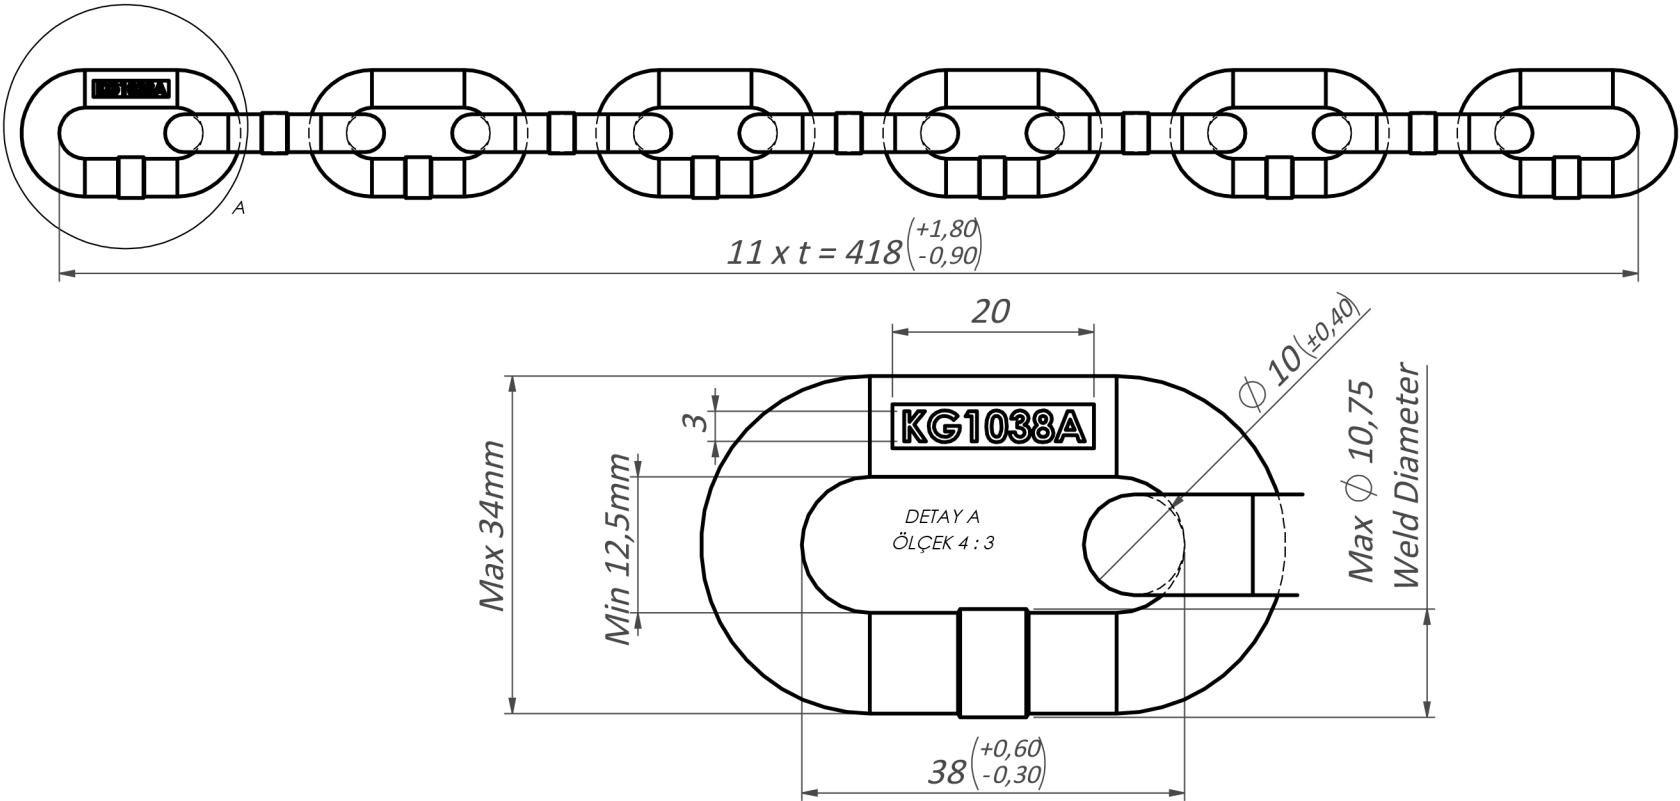

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel	0,988mt - 26link	Min : 988mm
Standards for manufacturing and testing	DIN -32895		Max : 991mm
Breaking Force (BF)	Min 112 kN	5,016mt - 132link	Min : 5016mm
Manufacturing Proof Force (MPF)	71 kN	9,994mt - 263link	Max : 5031mm
			Min : 9994mm
		25,004mt - 658-659link	Max : 10024mm
Working Load Limit (WLL)	Max 28 kN	25,004mt - 658-659link	Min : 25004mm
			Max : 25079mm
Ultimate Elongation (A)	% 10 min	50,008mt - 1316-1319link	Min : 50008mm
			Max : 50158mm
Bend Deflection (f)	8mm Min	100,016mt - 2632-2639link	Min : 100016mm
			Max : 100316mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.