


DIN-32895-Ø12x42x16mm Chain(KG1242A)

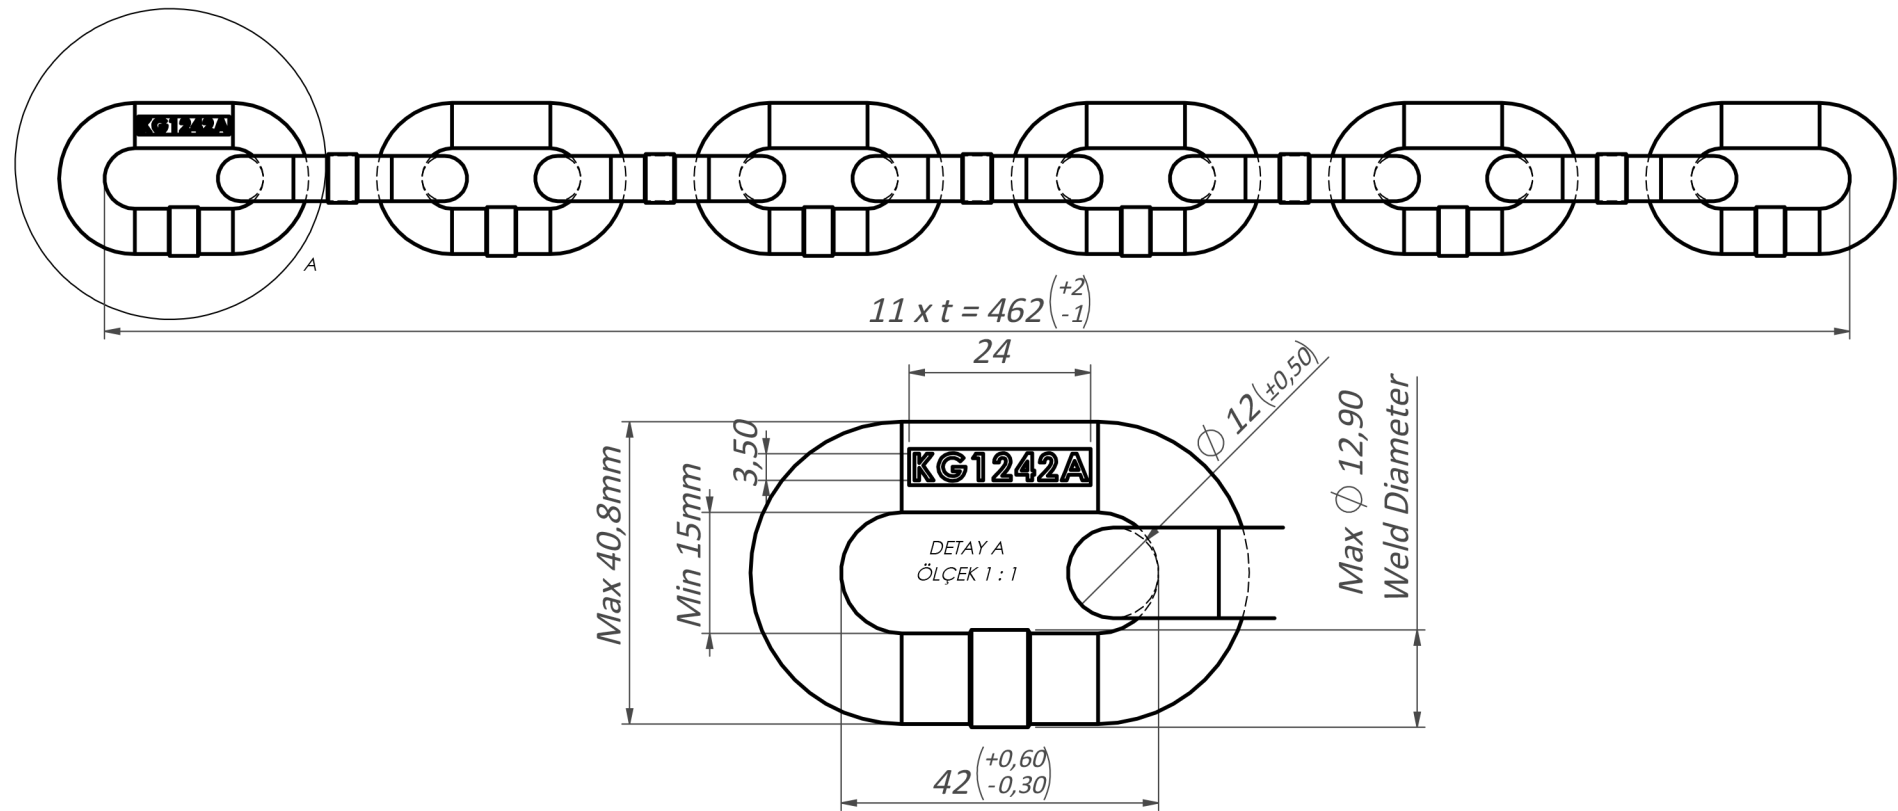

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel	1,008mt - 24link	Min : 1008mm
Standards for manufacturing and testing	DIN -32895		Max : 1011mm
Breaking Force (BF)	Min 160 kN	4,998mt - 119link	Min : 4998mm
Manufacturing Proof Force (MPF)	100 kN	9,996mt - 238link	Max : 5013mm
			Min : 9996mm
Working Load Limit (WLL)	Max 40 kN	24,990mt - 595-596link	Max : 10026mm
			Min : 24990mm
Ultimate Elongation (A)	% 10 min	49,980mt - 1190-1193link	Max : 25065mm
			Min : 49980mm
Bend Deflection (f)	10mm Min	100,002mt - 2381-2388link	Max : 50130mm
			Min : 100002mm
			Max : 100302mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.