
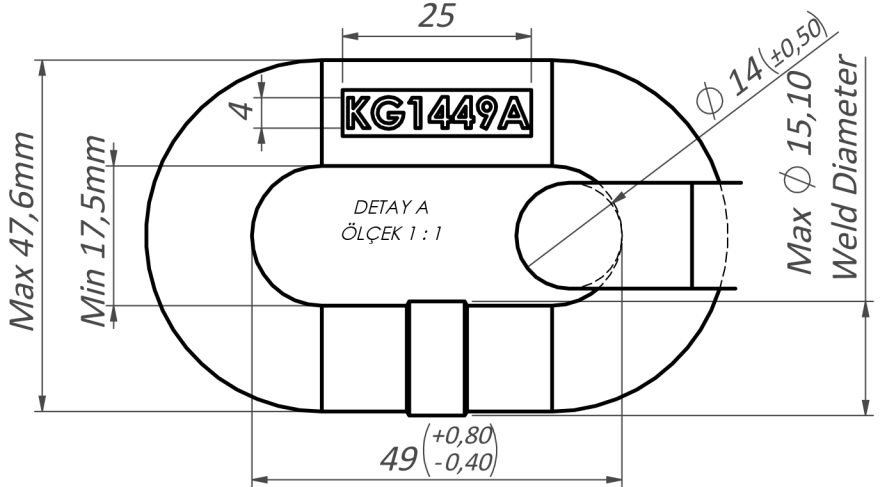


DIN-32895-Ø14x49x18,5mm Chain(KG1449A)

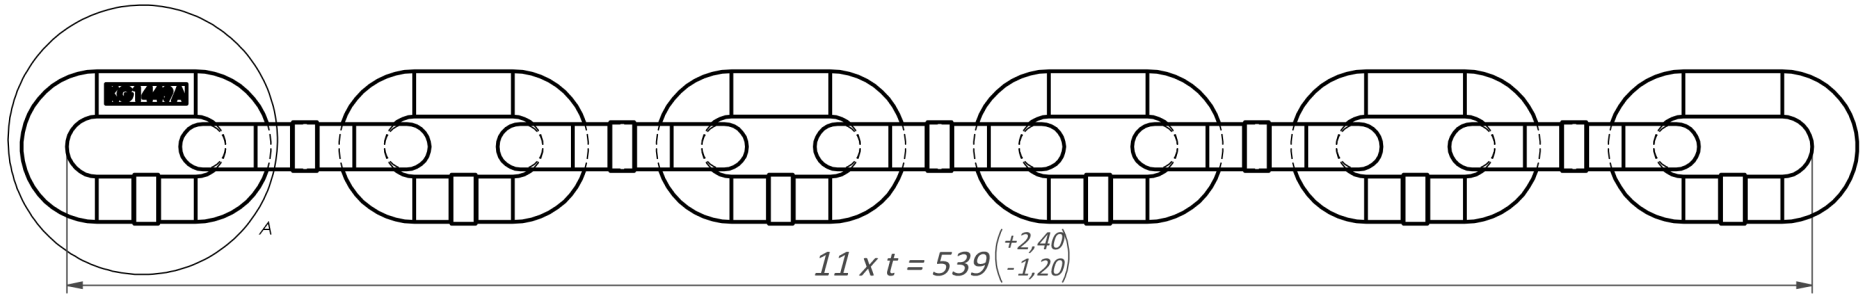

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel		
Standards for manufacturing and testing	DIN -32895	0,980mt - 20link	Min : 980mm Max : 983mm
Breaking Force (BF)	Min 218 kN	4,998mt - 102link	Min : 4998mm Max : 5013mm
Manufacturing Proof Force (MPF)	136 kN	9,996mt - 204link	Min : 9996mm Max : 10026mm
Working Load Limit (WLL)	Max 54,5 kN	24,990mt - 510-511link	Min : 24990mm Max : 25065mm
Ultimate Elongation (A)	% 10 min	49,980mt - 1020-1023link	Min : 49980mm Max : 50130mm
Bend Deflection (f)	11mm Min	100,009mt - 2041-2047link	Min : 100009mm Max : 100309mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.