


DIN-32895-Ø16x56x21,5mm Chain(KG1656A)

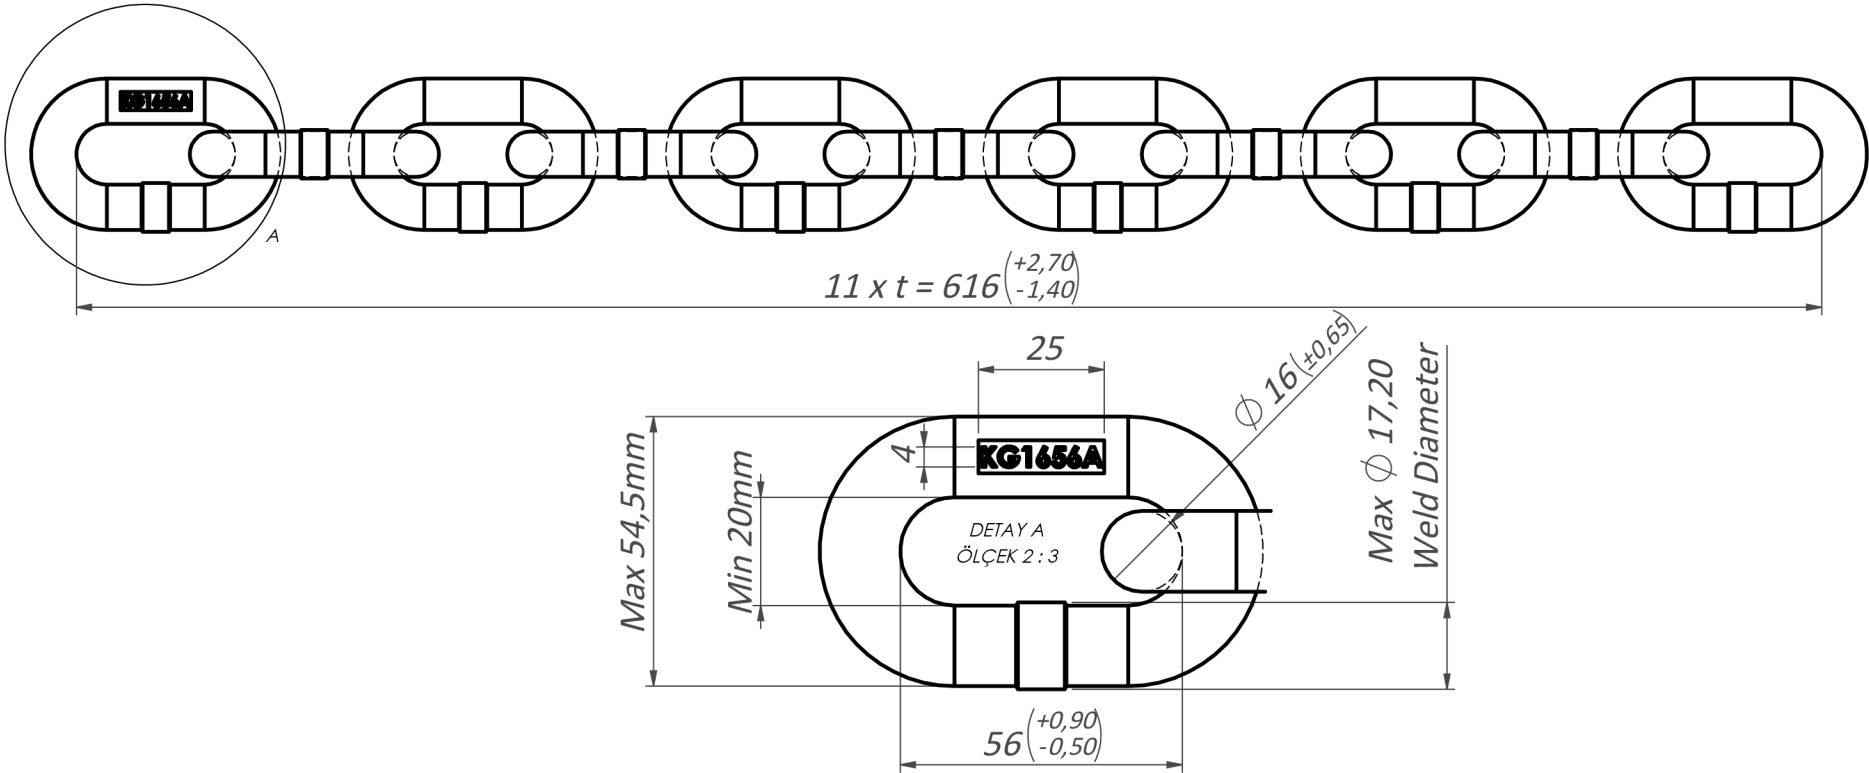

Properties & Notes		Tolerances for Total Meters in Production	
Material	Alloy Steel	1,008mt - 18link	Min : 1008mm
Standards for manufacturing and testing	DIN -32895		Max : 1011mm
Breaking Force (BF)	Min 285 kN	4,984mt - 89link	Min : 4984mm
Manufacturing Proof Force (MPF)	177,5 kN		Max : 4999mm
Working Load Limit (WLL)	Max 71 kN	10,024mt - 179link	Min : 10024mm
			Max : 10054mm
Ultimate Elongation (A)	% 10 min	24,976mt - 446-447link	Min : 24976mm
			Max : 25051mm
Bend Deflection (f)	13mm Min	50,008mt - 893-895link	Min : 50008mm
			Max : 50158mm
		100,016mt - 1786-1791link	Min : 100016mm
			Max : 100316mm

NOTE : Unless otherwise stated, the tolerances in the table apply. However, for double chain strips, the maximum difference between them should not exceed 0.1%.