

R65 LED Light Head Instruction


RED.....To +VDC (fuse @3A)
BLACK.....To Chassis Ground
YELLOW.....Pattern Selector
YELLOW and **WHITE**..... Synchronization

To make light heads Sync, connect

The **YELLOW** wire of the even number of heads to the **White** wire of the odd number of heads.

To select flash pattern

connect The vacated **YELLOW** (Master) momentarily to **RED** for 1 second to change pattern.

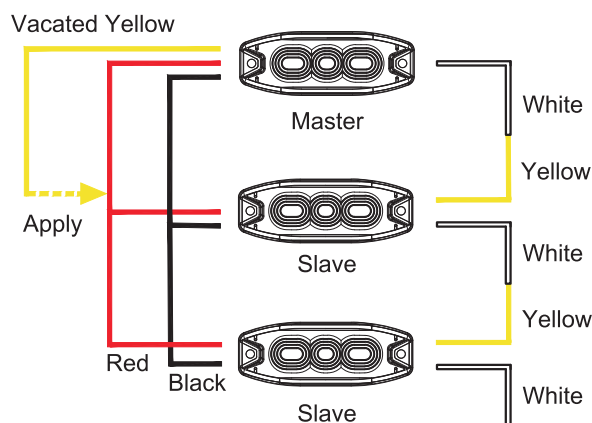

3 LED FLASH PATTERNS

- 1 Single ECE R65
- 2 Double ECE R65
- 3 Quad ECE R65
- 4 Double SAE J595 CLASS1
- 5 Random
- 6 Single
- 7 Double
- 8 Quad
- 9 Quint
- 10 Double/Accelerator
- 11 Burst
- 12 Single/Quad
- 13 Single/Accelerator
- 14 Quad/Decelerate
- 15 Quint/Accelerator
- 16 Single/Decelerate
- 17 Double/Decelerate
- 18 Steady
- 19 Off

4/6 LED FLASH PATTERNS

- 1 Single ECE R65
- 2 Double ECE R65
- 3 Quad ECE R65
- 4 Double SAE J595 CLASS1
- 5 Random
- 6 Single - Split
- 7 Double - Split
- 8 Quad - Split
- 9 Quint - Split
- 10 Double/Accelerator -Split
- 11 Burst -Split
- 12 Single/Quad -Split
- 13 Single/Accelerator - Split
- 14 Quad - All
- 15 Quint - All
- 16 Single Decelerate
- 17 Half Steady-1
- 18 Half Steady-2
- 19 Off

140 mm

210 mm