

R65 LED Light Head Instruction

RED.....To +VDC (fuse @3A)

BLACK.....To Chassis Ground

YELLOWPatterns Selector


YELLOW and **WHITE** Synchronization

To make light heads Sync, connect

The **Yellow** wire of the even number of heads to the **White** wire of the odd number of heads.

To select flash pattern, connect

The vacated **YELLOW** (Master) momentarily apply to **RED** for 1 second to change pattern.

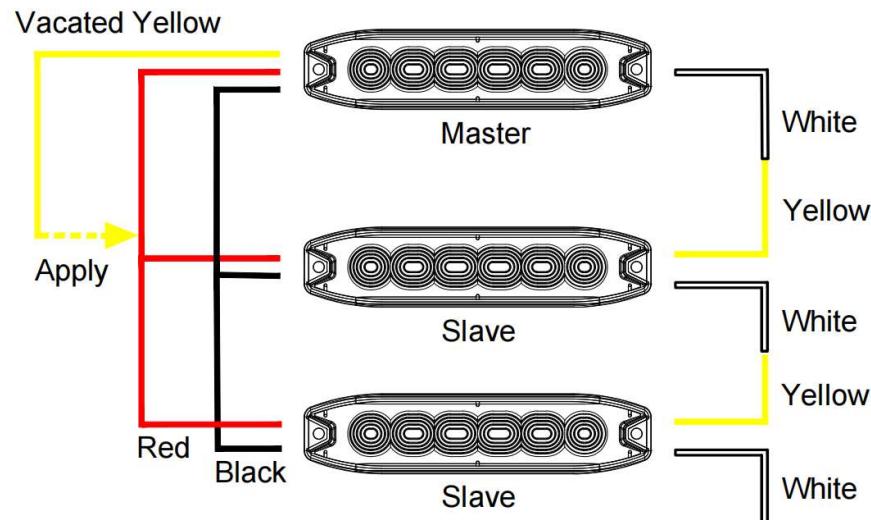

6 LED FLASH PATTERNS

- 1 Single ECE R65 TA1/TB1
- 2 Single ECE R65 TA2/TB2
- 3 Double ECE R65
- 4 Quad ECE R65
- 5 Double SAE J595 CLASS1
- 6 Random
- 7 Single - Split
- 8 Double - Split
- 9 Quad - Split
- 10 Quint - Split
- 11 Double/Accelerator -Split
- 12 Burst -Split
- 13 Single/Quad -Split
- 14 Single/Accelerator - Split
- 15 Quad - All
- 16 Quint - All
- 17 Single Decelerate
- 18 Steady
- 19 Off