


TWO WAY NORMALLY CLOSED DIRECT ACTING SOLENOID VALVE

DESCRIPTION






Two way direct acting solenoid valve with spring return, normally close.

Suitable for gaseous and liquid media compatible with the used material (body/seals), vacuum.

Forged brass body.
Brass guide tube.
Stainless steel internal parts.
Stainless steel springs.

Solenoid can be rotated 360°.
Valve will operate in any position

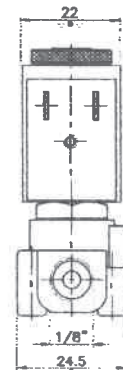

SPECIFICATIONS

Model :
Internal orifice : 3,1 mm
Pressures : 0 + 10 Bar
Port size : 1/8"
Seals material : NBR

ELETTRICAL INFORMATIONS


Continuous duty glass-reinforced nylon moulded coil with electrical connection suitable for DIN-43650 plug (2 poles+ground) or faston wire terminal.

Coil type: C5
Insulation class: H (180°C)
Winding wire class: H (180°C)
Protection class: Waterproof IP-65 (EN60529 standards) when properly plug connctted with DIN-43650 plug.

Duty: Continuous (S.I.) 25% ED
Power consumption: Direct Current 15W
Voltage tollerance: +10% ÷ -5%
Elettrical Insulation: >500 MOhm
Dielectrical Strenght: >2000 V/1'
Standard voltage: d.c. 12, 24 Volt

OPERATION

Normally close



In : IN
Out : OUT
Coil de-energised: IN and OUT close.
Coil energised: IN to OUT

Part no.	Voltage
1080010	12 Vdc
1080011	24 Vdc

N°	INDICE	DESCRIZIONE	DATA	DISEGNAITORE
MATERIALE:				
TRATTAMENTO:				
DIS.	Panò	FIRMA	DATA	SCALA
VER.			01.12.2020	1:1
DES.	TECHNICAL DATA			
	ELETRIC VALVE			
PART NUMBER				1080010 1080011