

Piedi d'appoggio con maniglia laterale, due velocità, a 3 sfilate
Parking jacks with side handle, 2-speeds, three stages
Stützfüsse mit waagrechter Kurbel, zwei-gängig, dreistufig
Pieds-béquilles avec manivelle latérale, deux vitesses, à trois éléments


SIMOL
 your technical support

DG 6/3SFW

DUE VELOCITÀ
 2-SPEEDS
 ZWEI-GÄNGIG
 DEUX VITESSES

Codice
 Code
 Bestell NR.
 Réf.

DG 600/3SFW

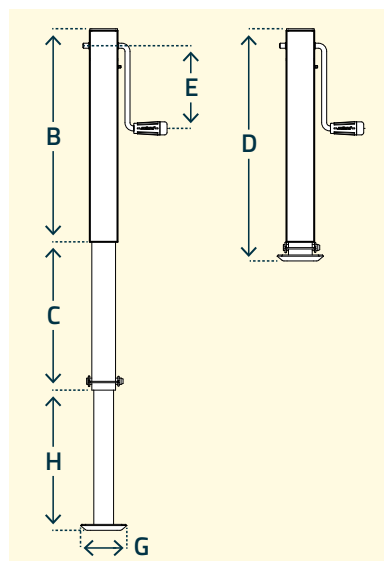

Esempi di applicazione a pag. 124/127 _ For examples of use see page 124/127 _ Anwendungsmöglichkeiten auf Seite 124/127 _ Exemples d'utilisation à page 124/127

DG 6/3SFW

Codice
 Code
 Bestell NR.
 Réf.



Tubo esterno
 Outer tube
 Aussenrohr
 Tube extérieur

| mm |



Corsa della vite
 Screw stroke
 Spindelhub
 Course de la vis

| mm ±10 |



Ruote ferro
 Steel wheels
 Stahlblechräder
 Roues acier

| mm |



Ruote gomma
 Rubber wheels
 Vollgummiräder
 Roues avec bandage caoutchouc

| mm |



Peso unitario
 Unitary weight
 Einheitsgewicht
 Poids unitaire

| Kg |



Portata statica max
 Maxi. Static load
 Maxi. Statische Tragfähigkeit
 Charge statique maxi

| Kg |

B	C	D	E	G	H
mm	mm	mm	mm	mm	mm

Modelli Standard _ Standard Models _ Standardausführungen _ Modèles Standard

DG 600/3SFW*	□ 70	300	-	-	13	3270	545	375	635	210	120X165	355
--------------	------	-----	---	---	----	------	-----	-----	-----	-----	---------	-----

* Zincato _ Galvanised _ Galvanisch verzinkt _ Galvanisé


Due velocità _ 2-speeds _ Zwei-gängig _ Deux vitesses

DG 6/3SFW

Ratio

Giri maniglia per 100 mm di escursione
 Handle turns / 100 mm travel
 Kurbeldrehung / 100 mm Hub
 Rotations manivelle pour 100 mm de course


Marcia ridotta (regolazione del carico) _ Low gear (to lift load)
 Lastgang (Regelung der Last)
 Vitesse réduite (réglage avec charge)



1 : 2

40

Marcia veloce (assenza di carico)
 High gear (without load)
 Schnellgang (ohne Last) _ Vitesse rapide (sans charge)



1,33 : 1

15