


DG 6W

DUE VELOCITÀ
2-SPEEDS
ZWEI-GÄNGIG
DEUX VITESSES

Codice
Code
Bestell NR.
Réf.
DG 600W



Piedi d'appoggio con maniglia laterale, due velocità
Parking jacks with side handle, 2-speeds
Stützfüsse mit waagrechter Kurbel, zwei-gängig
Pieds-béquilles avec manivelle latérale, deux vitesses

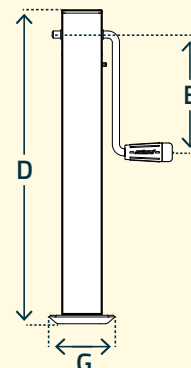

Esempi di applicazione a pag. 124/127 _ For examples of use see page 124/127 _ Anwendungsmöglichkeiten auf Seite 124/127 _ Exemples d'utilisation à page 124/127

DG 6W

Codice
Code
Bestell NR.
Réf.



Tubo esterno
Outer tube
Aussenrohr
Tube extérieur

| mm |



Corsa della vite
Screw stroke
Spindelhub
Course de la vis

| mm ±10 |



Ruote ferro
Steel wheels
Stahlblechräder
Roues acier

| mm |



Ruote gomma
Rubber wheels
Vollgummiräder
Roues avec
bandage
caoutchouc

| mm |



Peso unitario
Unitary weight
Einheitsgewicht
Poids unitaire

| Kg |



Portata statica max
Maxi. static load
Maxi. Statische
Tragfähigkeit
Charge statique maxi

| Kg |

D

| mm |

E

| mm |

G

| mm |

Modelli Standard _ Standard Models _ Standardausführungen _ Modèles Standard

DG 600W

□ 70

300

-

-

9,32

3500

555

210

120X165


Due velocità _ 2-speeds _ Zwei-gängig _ Deux vitesses

DG 6W

Ratio

Giri maniglia per 100 mm di escursione
Handle turns / 100 mm travel
Kurbeldrehung / 100 mm Hub
Rotations manivelle pour 100 mm de course


Marcia ridotta (regolazione del carico) _ Low gear (to lift load)
Lastgang (Regelung der Last)
Vitesse réduite (réglage avec charge)



1 : 2

40

Marcia veloce (assenza di carico)
High gear (without load)
Schnellgang (ohne Last) _ Vitesse rapide (sans charge)



1,33 : 1

15