



TeeJet® Double Outlet Flat Spray Tips

150° Series Stainless Steel and Brass

Suggested for post-directed application with hose drops.

How to order:

Specify tip number and material.

Example: TQ150-03-SS – Stainless Steel



Icon	bar	CAPACITY ONE NOZZLE IN l/min	I/ha 50cm							
			4 km/h	6 km/h	8 km/h	10 km/h	12 km/h	14 km/h	16 km/h	18 km/h
TQ150-01-SS (100)	1.5	0.28	84.0	56.0	42.0	33.6	28.0	24.0	21.0	18.7
	2.0	0.32	96.0	64.0	48.0	38.4	32.0	27.4	24.0	21.3
	2.5	0.36	108	72.0	54.0	43.2	36.0	30.9	27.0	24.0
	3.0	0.39	117	78.0	58.5	46.8	39.0	33.4	29.3	26.0
TQ150-01-SS (100)	3.5	0.42	126	84.0	63.0	50.4	42.0	36.0	31.5	28.0
	1.5	0.42	126	84.0	63.0	50.4	42.0	36.0	31.5	28.0
	2.0	0.48	144	96.0	72.0	57.6	48.0	41.1	36.0	32.0
	2.5	0.54	162	108	81.0	64.8	54.0	46.3	40.5	36.0
TQ150-02-SS (100)	3.0	0.59	177	118	88.5	70.8	59.0	50.6	44.3	39.3
	3.5	0.64	192	128	96.0	76.8	64.0	54.9	48.0	42.7
	1.5	0.56	168	112	84.0	67.2	56.0	48.0	42.0	37.3
	2.0	0.65	195	130	97.5	78.0	65.0	55.7	48.8	43.3
TQ150-02-SS (100)	2.5	0.72	216	144	108	86.4	72.0	61.7	54.0	48.0
	3.0	0.79	237	158	119	94.8	79.0	67.7	59.3	52.7
	3.5	0.85	255	170	128	102	85.0	72.9	63.8	56.7
	1.5	0.83	249	166	125	99.6	83.0	71.1	62.3	55.3
TQ150-03-SS (100)	2.0	0.96	288	192	144	115	96.0	82.3	72.0	64.0
	2.5	1.08	324	216	162	130	108	92.6	81.0	72.0
	3.0	1.18	354	236	177	142	118	101	88.5	78.7
	3.5	1.27	381	254	191	152	127	109	95.3	84.7
TQ150-04-SS (50)	1.5	1.12	336	224	168	134	112	96.0	84.0	74.7
	2.0	1.29	387	258	194	155	129	111	96.8	86.0
	2.5	1.44	432	288	216	173	144	123	108	96.0
	3.0	1.58	474	316	237	190	158	135	119	105
TQ150-04-SS (50)	3.5	1.71	513	342	257	205	171	147	128	114
	1.5	1.39	417	278	209	167	139	119	104	92.7
	2.0	1.61	483	322	242	193	161	138	121	107
	2.5	1.80	540	360	270	216	180	154	135	120
TQ150-05-SS (50)	3.0	1.97	591	394	296	236	197	169	148	131
	3.5	2.13	639	426	320	256	213	183	160	142
	1.5	1.68	504	336	252	202	168	144	126	112
	2.0	1.94	582	388	291	233	194	166	146	129
TQ150-06-SS (50)	2.5	2.16	648	432	324	259	216	185	162	144
	3.0	2.37	711	474	356	284	237	203	178	158
	3.5	2.56	768	512	384	307	256	219	192	171
	1.5	2.23	669	446	335	268	223	191	167	149
TQ150-08-SS (50)	2.0	2.58	774	516	387	310	258	221	194	172
	2.5	2.88	864	576	432	346	288	247	216	192
	3.0	3.16	948	632	474	379	316	271	237	211
	3.5	3.41	1023	682	512	409	341	292	256	227
TQ150-09-SS (50)	1.5	2.51	753	502	377	301	251	215	188	167
	2.0	2.90	870	580	435	348	290	249	218	193
	2.5	3.24	972	648	486	389	324	278	243	216
	3.0	3.55	1065	710	533	426	355	304	266	237
TQ150-09-SS (50)	3.5	3.83	1149	766	575	460	383	328	287	255

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). See pages 173–187 for drop size classification, useful formulas and information.



TeeJet® Off-Center Flat Spray Tips — Smaller Capacities


TeeJet Off-Center spray tips are commonly installed in double and single swivel nozzle bodies. Because these bodies are adjustable for angular position, a wide spray swath is easily obtained.

See page 67 for swivels and hose drops.

How to order:

Specify tip number and material.

Example: OC-02 – Brass

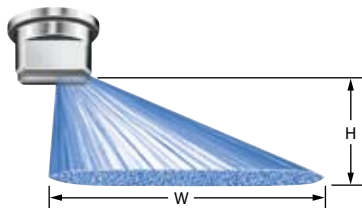

Icon	bar	CAPACITY ONE NOZZLE IN l/min	HEIGHT = 45 cm						HEIGHT = 60 cm					
			"W" cm	I/ha				"W" cm	I/ha					
				4 km/h	6 km/h	8 km/h	10 km/h		4 km/h	6 km/h	8 km/h	10 km/h		
OC-01 (100)	2.0	0.32	147	32.7	21.8	16.3	13.1	165	29.1	19.4	14.5	11.6		
	3.0	0.39	152	38.5	25.7	19.2	15.4	170	34.4	22.9	17.2	13.8		
	4.0	0.45	157	43.0	28.7	21.5	17.2	175	38.6	25.7	19.3	15.4		
OC-02 (50)	2.0	0.65	172	56.7	37.8	28.3	22.7	190	51.3	34.2	25.7	20.5		
	3.0	0.79	177	66.9	44.6	33.5	26.8	195	60.8	40.5	30.4	24.3		
	4.0	0.91	182	75.0	50.0	37.5	30.0	198	68.9	46.0	34.5	27.6		
OC-03 (50)	2.0	0.96	195	73.8	49.2	36.9	29.5	203	70.9	47.3	35.5	28.4		
	3.0	1.18	203	87.2	58.1	43.6	34.9	210	84.3	56.2	42.1	33.7		
	4.0	1.36	208	98.1	65.4	49.0	39.2	215	94.9	63.3	47.4	38.0		
OC-04 (50)	2.0	1.29	231	83.8	55.8	41.9	33.5	236	82.0	54.7	41.0	32.8		
	3.0	1.58	236	100	66.9	50.2	40.2	238	99.6	66.4	49.8	39.8		
	4.0	1.82	238	115	76.5	57.4	45.9	241	113	75.5	56.6	45.3		
OC-06 (50)	2.0	1.94	251	116	77.3	58.0	46.4	274	106	70.8	53.1	42.5		
	3.0	2.37	256	139	92.6	69.4	55.5	279	127	84.9	63.7	51.0		
	4.0	2.74	259	159	106	79.3	63.5	281	146	97.5	73.1	58.5		
OC-08 (50)	2.0	2.58	254	152	102	76.2	60.9	279	139	92.5	69.4	55.5		
	3.0	3.16	259	183	122	91.5	73.2	284	167	111	83.5	66.8		
	4.0	3.65	264	207	138	104	83.0	287	191	127	95.4	76.3		
OC-12	2.0	3.87	259	224	149	112	89.7	287	202	135	101	80.9		
	3.0	4.74	264	269	180	135	108	292	243	162	122	97.4		
	4.0	5.47	266	308	206	154	123	294	279	186	140	112		
OC-16	2.0	5.16	335	231	154	116	92.4	360	215	143	108	86.0		
	3.0	6.32	350	271	181	135	108	370	256	171	128	102		
	4.0	7.30	363	302	201	151	121	375	292	195	146	117		

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C). See pages 173–187 for drop size classification, useful formulas and information.