
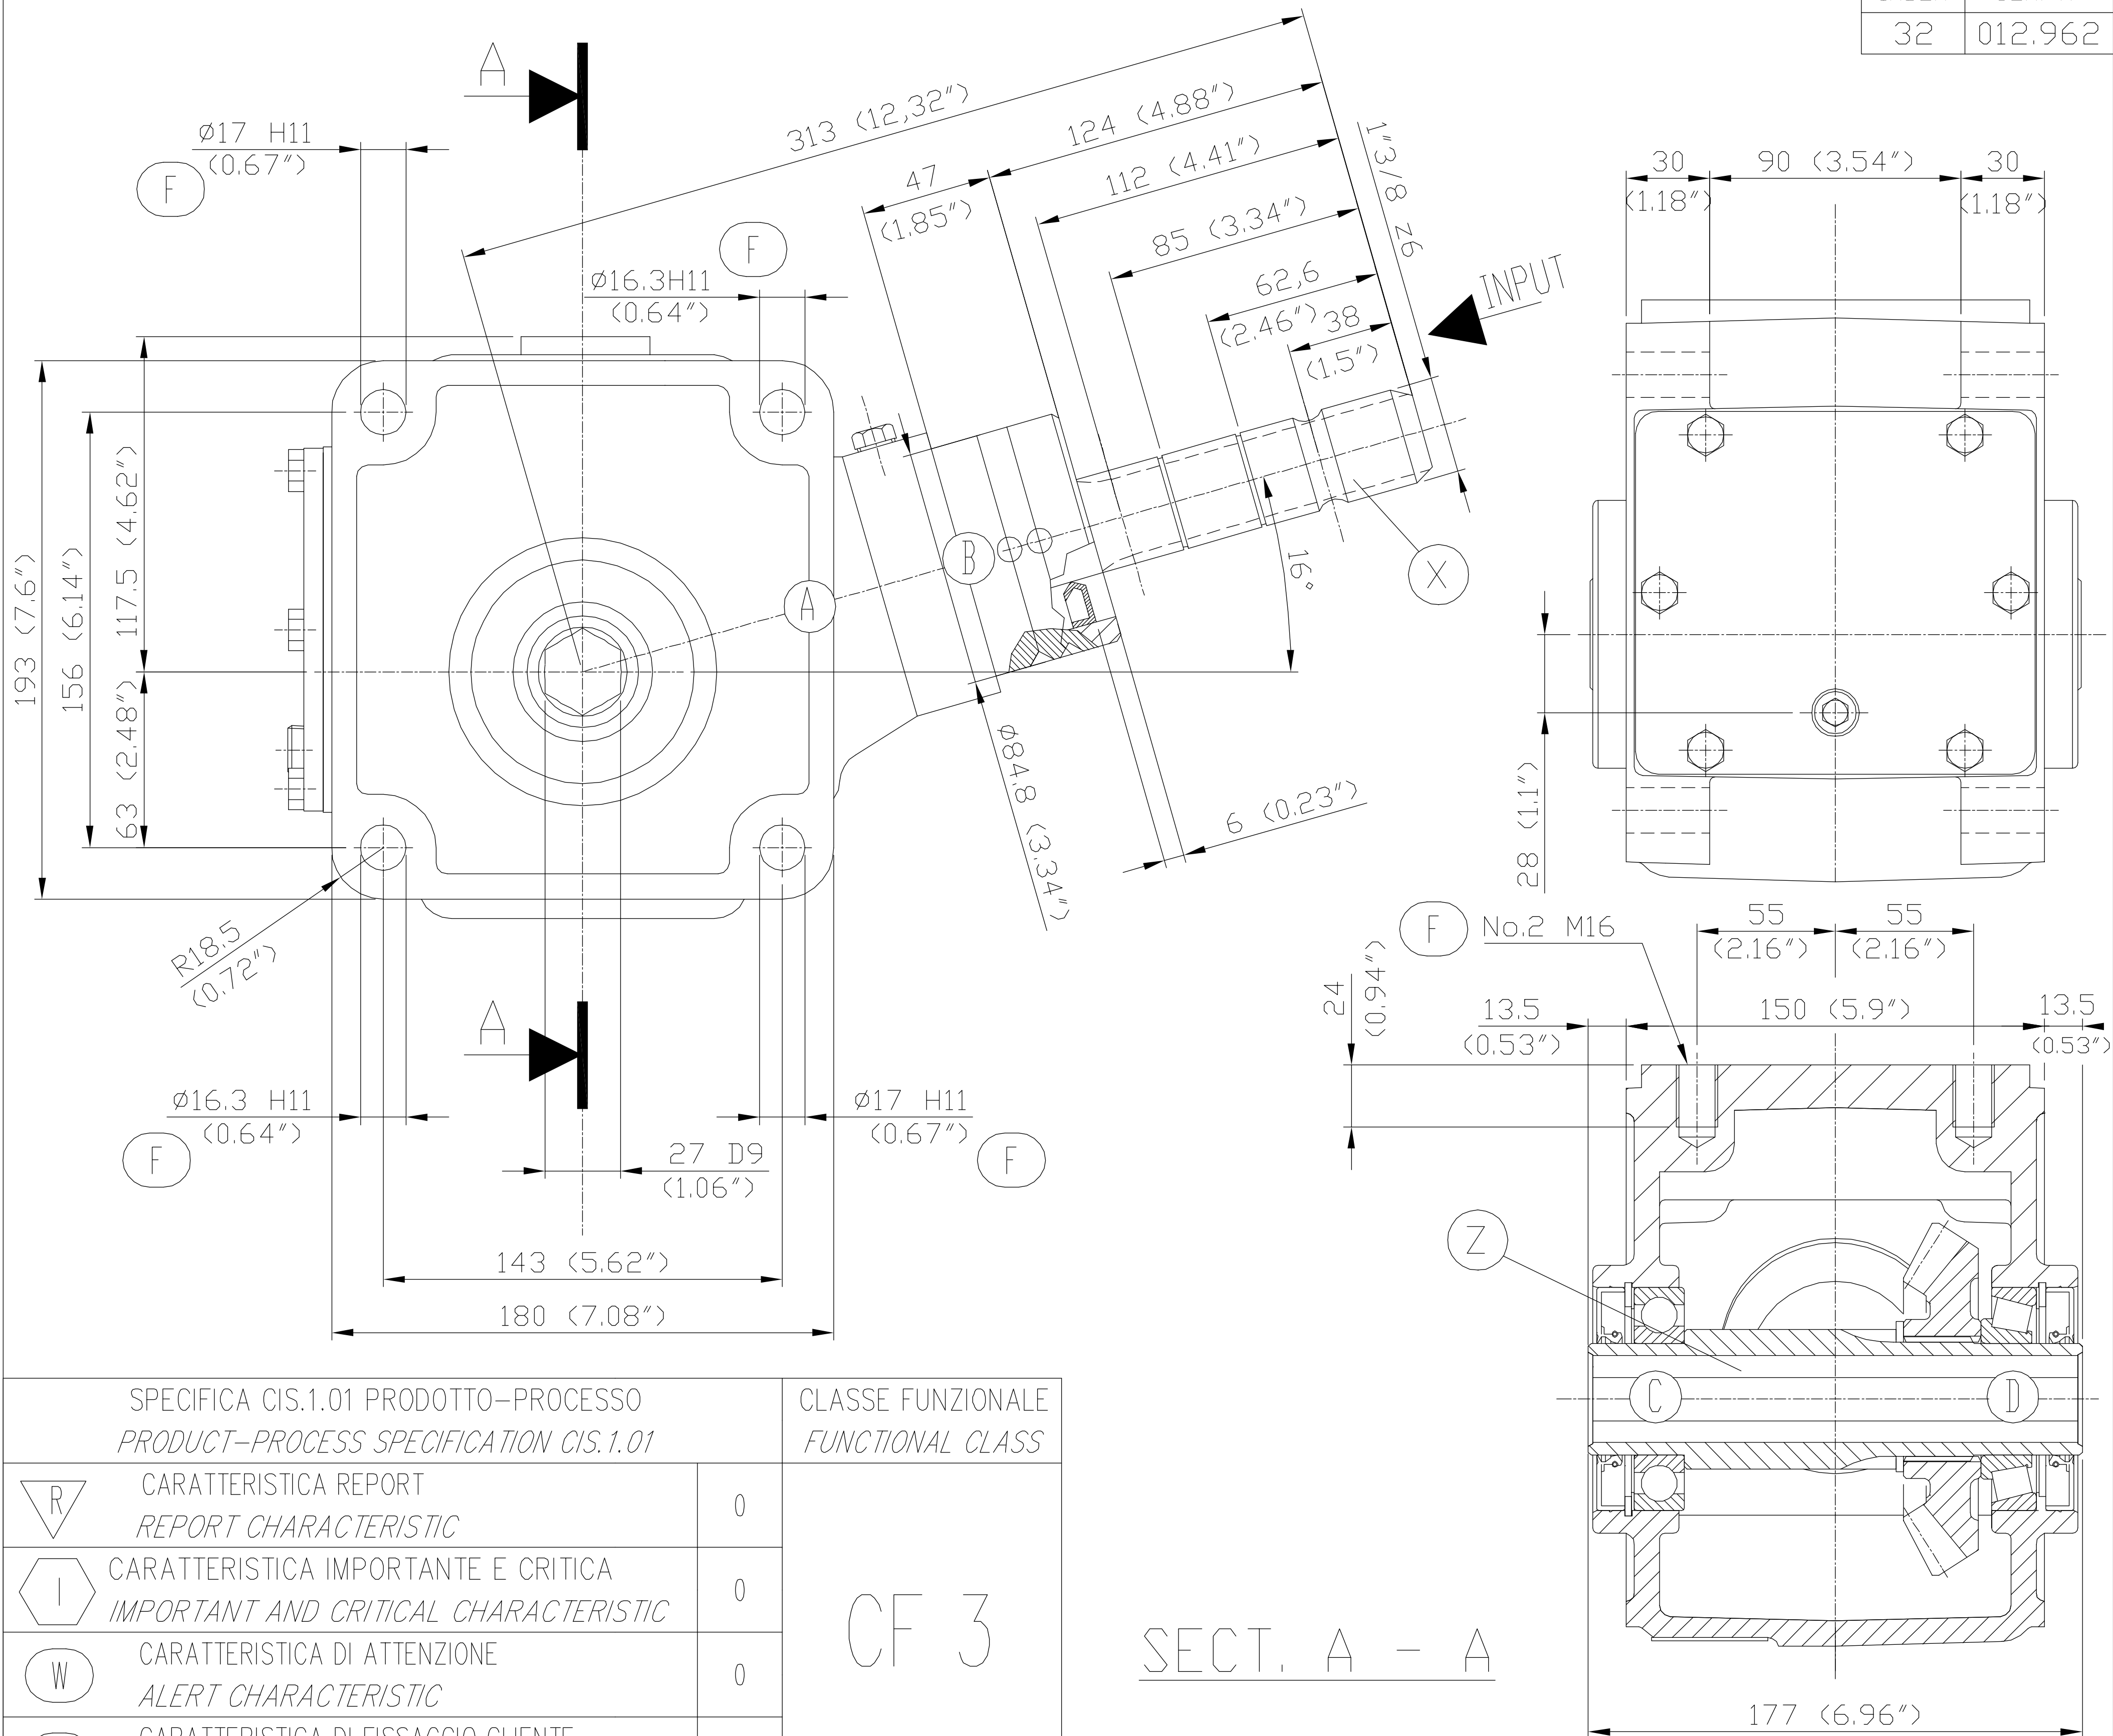





INDEX	COM. N°
32	012.962

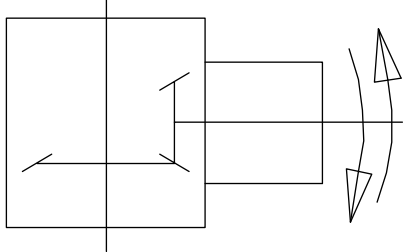

SPECIFICA CIS.1.01 PRODOTTO-PROCESSO PRODUCT-PROCESS SPECIFICATION CIS.1.01			CLASSE FUNZIONALE FUNCTIONAL CLASS	
	CARATTERISTICA REPORT REPORT CHARACTERISTIC	0	CF 3	
	CARATTERISTICA IMPORTANTE E CRITICA IMPORTANT AND CRITICAL CHARACTERISTIC	0		
	CARATTERISTICA DI ATTENZIONE ALERT CHARACTERISTIC	0		
	CARATTERISTICA DI FISSAGGIO CLIENTE FIT CHARACTERISTIC	5		

SECT. A - A

REDUCTION GEAR UNIT	Ratio i		Rated input r.p.m.		Rated input power HP kW		Rated output torque da Nm		Weight Kg		Oil ☒ Lubricant Grease ☐ Type Quantity Lt.							
	1.77		540		27 20		-		-		SAE.90EP							
	Gear Arrangement		Bevel couplings					Cylindrical couplings					Bearings					
			Helicoidal	Straight	Teeth number			Module	Helicoidal	Straight	Teeth number			Module	A	32207		
					Z 1	Z 2	Z 3	Z 4	M.			Z 1	Z 2	Z 3	Z 4	M.	B	32007X
				*	13	23			5.8								C	6208
																	D	30208
																	E	
	Components material														F			
	Casing		Shaft X		Shaft Z		Bevel gear		Spur gear				G					
ASTM 60-40-18		AISI 3120		AISI 5140				AISI 3120				H						

COMER INDUSTRIES reserves the right to make any change to this product without prior public acknowledgement

COMER INDUSTRIES S.p.A. 42046 Villanova di Reggiolo (R.E.) Italia Tel. 0522\974111 (9 Linee) Telefax 0522\973249