

LINK BR 1-A

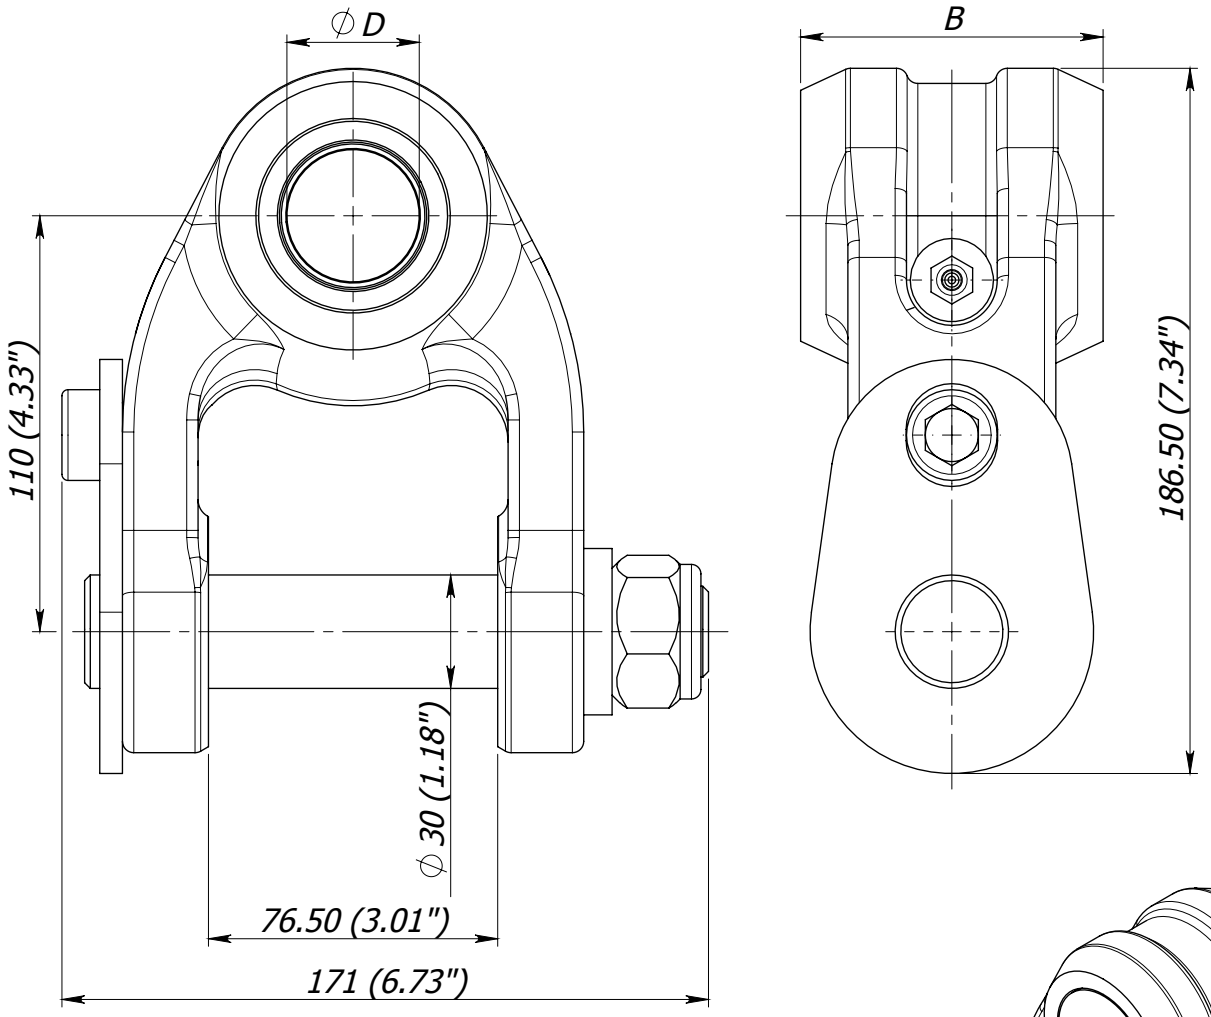

Dimensions			
Crane nose pivot pin diameter ∅D (mm)	Link width B (mm)		
	$80^{0}_{-0.3}$ (3.15")	$70^{0}_{-0.3}$ (2.76")	$60^{0}_{-0.3}$ (2.36")
45 (1.77")	BR 1-A/80/45	BR 1-A/70/45	BR 1-A/60/45
40 (1.57")	BR 1-A/80/40	BR 1-A/70/40	BR 1-A/60/40
35 (1.38")	BR 1-A/80/35	BR 1-A/70/35	BR 1-A/60/35
30 (1.18")	BR 1-A/80/30	BR 1-A/70/30	BR 1-A/60/30
25 (0.98")	BR 1-A/80/25	BR 1-A/70/25	BR 1-A/60/25
20 (0.79")	BR 1-A/80/20	BR 1-A/70/20	BR 1-A/60/20

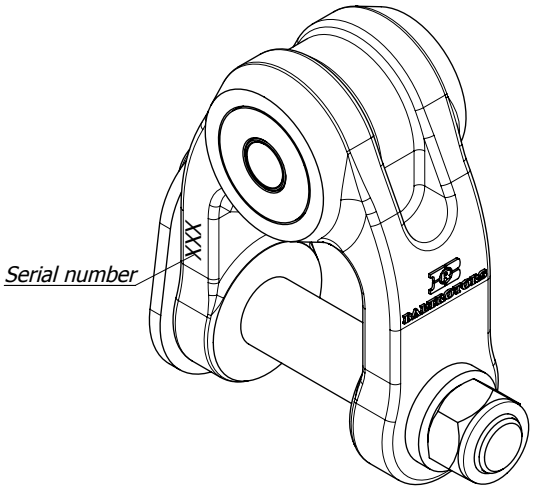

- *Pin locking nut is tightened with a torque of 120 Nm (89 lb ft)*
- *Weight - 5.5±1 kg (12.12±2.20 lb)*
- *Fill grease Starplex EP 2, through lubricating nipple (pos. 8), until it will appear to the external surfaces. Greasing must be repeated after every 8 working hours of the link.*


2007.10.05.

BALTROTORS

Instituta Street - 1, Salaspils. Riga region, LATVIA LV-2169
Phone: +(371) 67 981074, Fax: +(371) 67 981075
E-mail: baltrotors@baltrotors.lv

LINK BR 1-A

List of parts

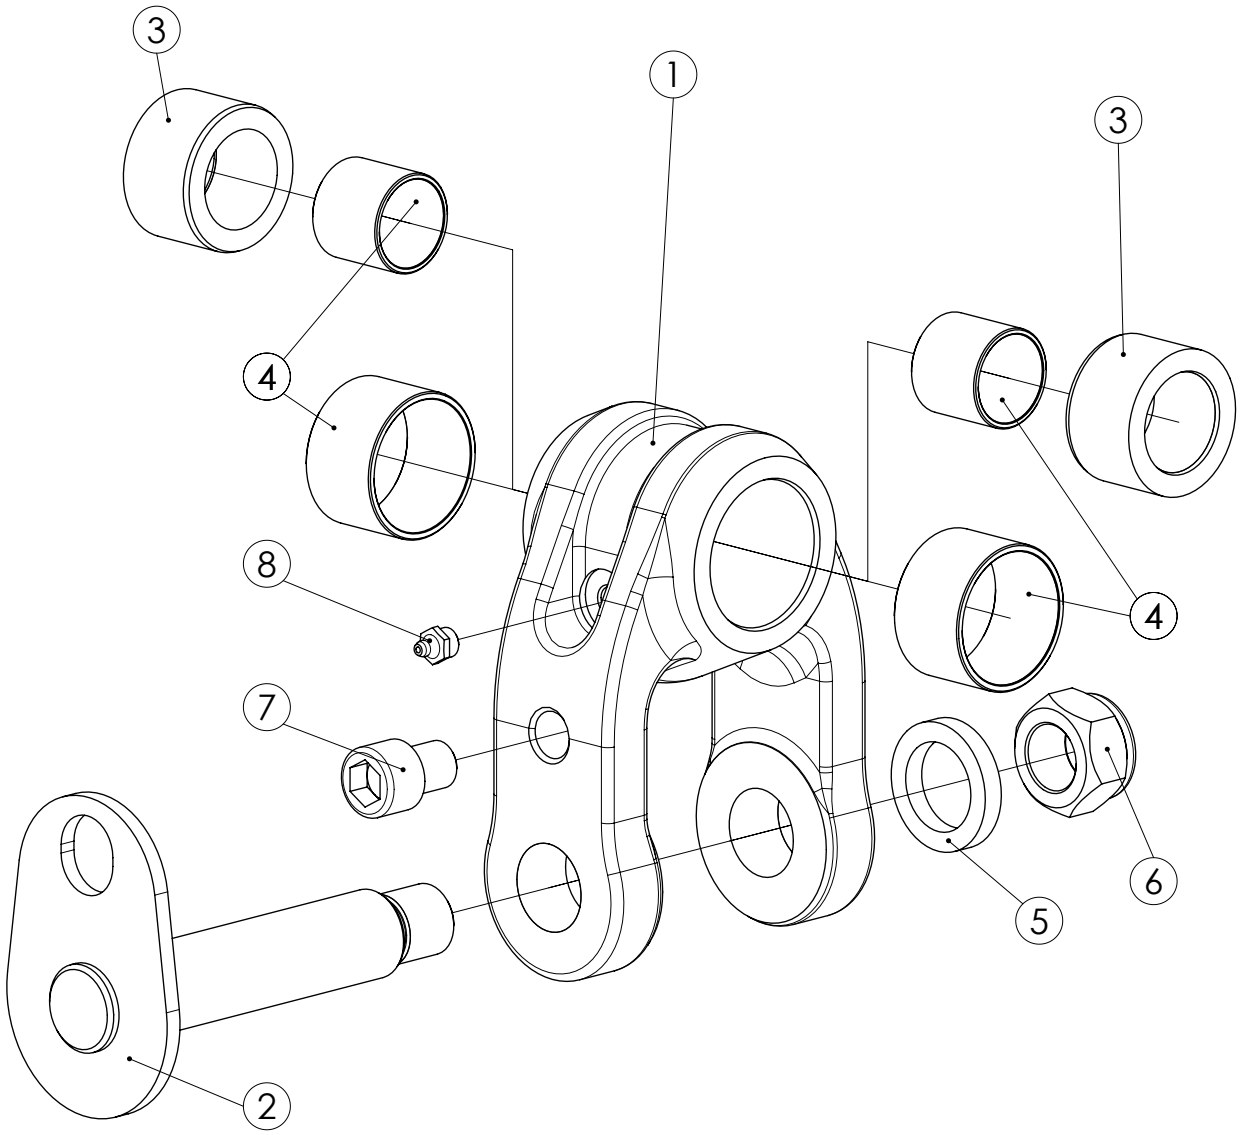

BALTROTORS
Instituta Street - 1, Salaspils. Riga region, LATVIA LV-2169
Phone: +(371) 67 981074, Fax: +(371) 67 981075
E-mail: baltrotors@baltrotors.lv

LINK BR 1-A

List of parts

Pos.	Part No.	Description	BR 1-A/80/45	BR 1-A/80/40	BR 1-A/80/35	BR 1-A/80/30	BR 1-A/80/25	BR 1-A/80/20	BR 1-A/70/45	BR 1-A/70/40	BR 1-A/70/35	BR 1-A/70/30	BR 1-A/70/25	BR 1-A/70/20	BR 1-A/60/45	BR 1-A/60/40	BR 1-A/60/35	BR 1-A/60/30	BR 1-A/60/25	BR 1-A/60/20	Notes
1	BR1-A.001-80	Link	1	1	1	1	1	1	-	-	-	-	-	-	-	-	-	-	-	-	
	BR1-A.001-70		-	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-	-	
	BR1-A.001-60		-	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1	
2	BR 1-A.01	Pin	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
3	BR 1.02.001/70/40	Bushing	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/35		-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/30		-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/25		-	-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	
	BR 1.02.001/70/20		-	-	-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	
	BR 1.02.001/60/40		-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	
	BR 1.02.001/60/35		-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	
	BR 1.02.001/60/30		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	
	BR 1.02.001/60/25		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	
	BR 1.02.001/60/20		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	
4	WB 800 4530	Bronze bushing	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	
	WB 800 4030		-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	
	WB 800 3530		-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	-	
	WB 800 3030		-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	-	
	WB 800 2530		-	-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	-	
	WB 800 2020		-	-	-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	2	
	BR 1.02.002/60/45		-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	
	BR 1.02.002/60/40		-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	
	BR 1.02.002/60/35		-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	
	BR 1.02.002/60/30		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	
	BR 1.02.002/60/25		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	
5	BR 1-A.003	Washer	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
6	M24x1.5	Nut	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
7	MC6S 12.9 M16x20	Screw	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
8	1.2.C6	Grease nipple	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	

2007.10.05.

BALTROTORS

Instituta Street - 1, Salaspils. Riga region, LATVIA LV-2169
Phone: +(371) 67 981074, Fax: +(371) 67 981075
E-mail: baltrotors@baltrotors.lv