

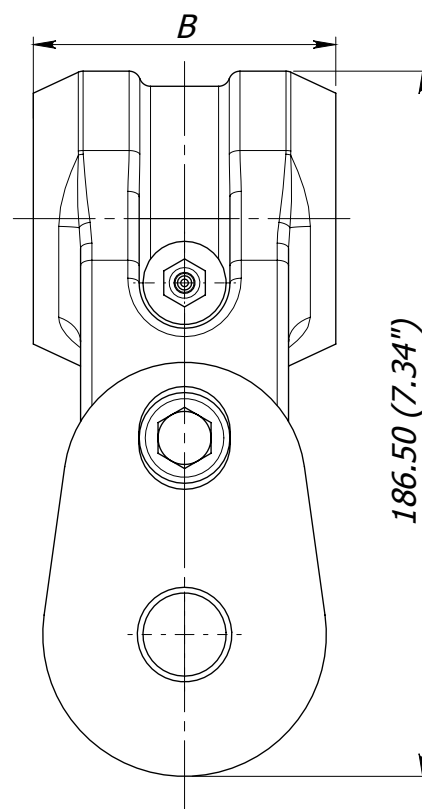


LINK BR 1

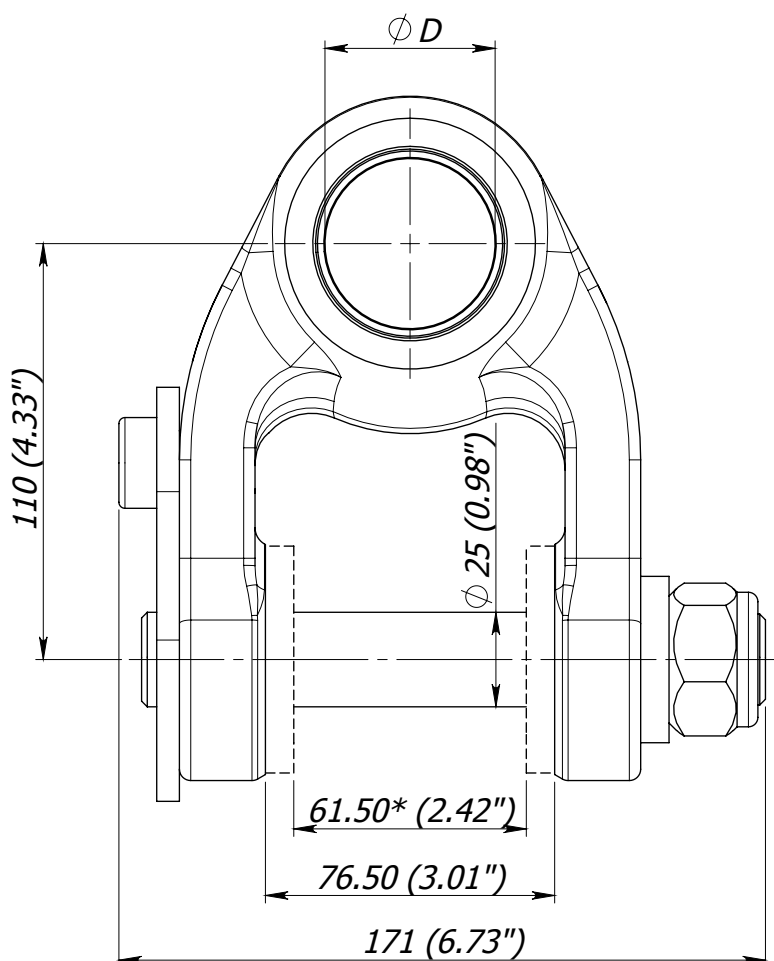

*** Only by request for rotator GR 30**


Dimensions			
Crane nose pivot pin diameter Ø D (mm)	Link width B (mm)		
	80 ⁰ _{-0.3} (3.15'')	70 ⁰ _{-0.3} (2.76'')	60 ⁰ _{-0.3} (2.36'')
45 (1.77'')	BR 1/80/45	BR 1/70/45	BR 1/60/45
40 (1.57'')	BR 1/80/40	BR 1/70/40	BR 1/60/40
35 (1.38'')	BR 1/80/35	BR 1/70/35	BR 1/60/35
30 (1.18'')	BR 1/80/30	BR 1/70/30	BR 1/60/30
25 (0.98'')	BR 1/80/25	BR 1/70/25	BR 1/60/25
20 (0.79'')	BR 1/80/20	BR 1/70/20	BR 1/60/20

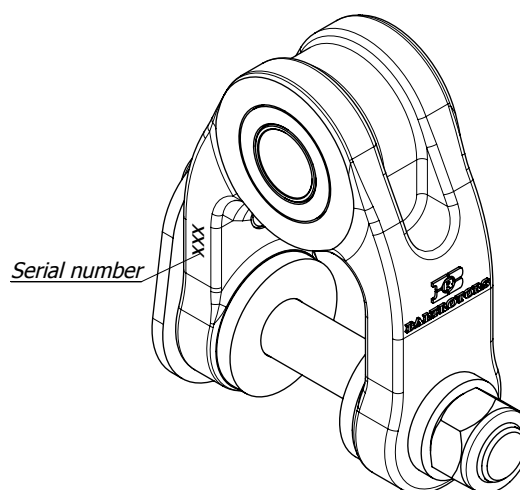

- Pin locking nut is tightened with a torque of 120 Nm (89 lb ft)
- Weight - 5.5±1 kg (12.12±2.20 lb)
- Fill grease Starplex EP 2, through lubricating nipple (pos. 9), until it will appear to the external surfaces. Greasing must be repeated after every 8 working hours of the link.

LINK BR 1

List of parts

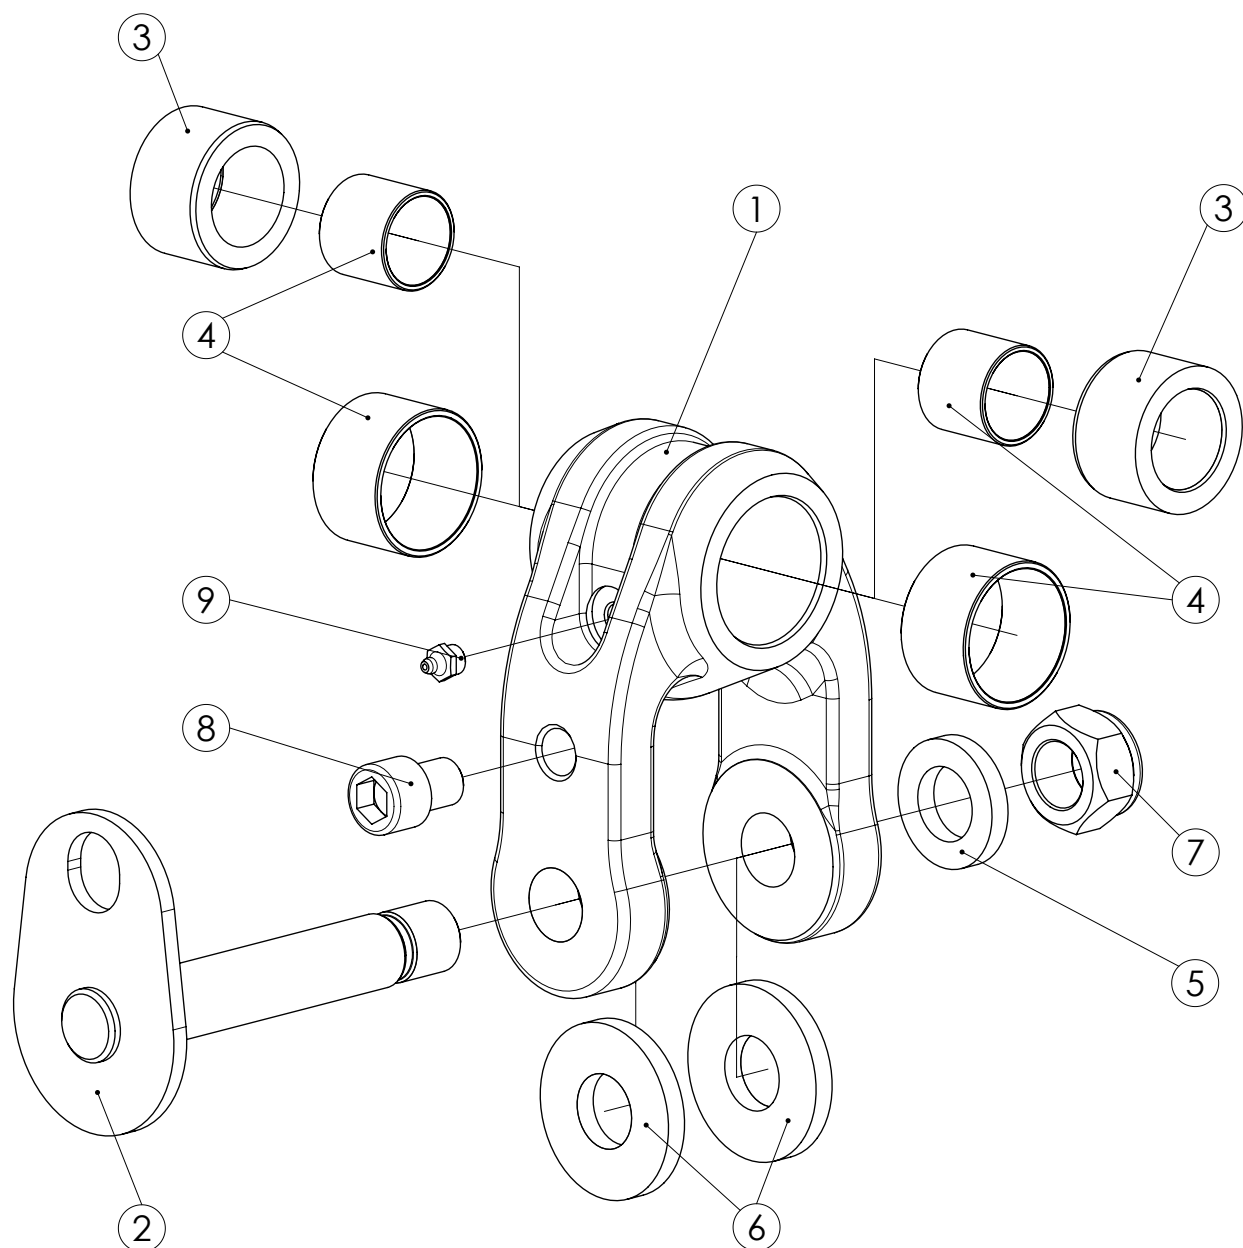

Washer (pos. 6) only by request for rotator GR 30.

2007.10.05. Sheet 2 of 3

LINK BR 1

List of parts

Pos.	Part No.	Description	BR 1/80/45	BR 1/80/40	BR 1/80/35	BR 1/80/30	BR 1/80/25	BR 1/80/20	BR 1/70/45	BR 1/70/40	BR 1/70/35	BR 1/70/30	BR 1/70/25	BR 1/70/20	BR 1/60/45	BR 1/60/40	BR 1/60/35	BR 1/60/30	BR 1/60/25	BR 1/60/20	Notes
1	BR1.001-80	Link	1	1	1	1	1	1	-	-	-	-	-	-	-	-	-	-	-	-	
	BR1.001-70		-	-	-	-	-	-	1	1	1	1	1	1	-	-	-	-	-	-	
	BR1.001-60		-	-	-	-	-	-	-	-	-	-	-	-	1	1	1	1	1	1	
2	BR 1.01	Pin	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
3	BR 1.02.001/70/40	Bushing	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/35		-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/30		-	-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/25		-	-	-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	
	BR 1.02.001/70/20		-	-	-	-	-	2	-	-	-	-	-	2	-	-	-	-	-	-	
	BR 1.02.001/60/40		-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	
	BR 1.02.001/60/35		-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	
	BR 1.02.001/60/30		-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	
	BR 1.02.001/60/25		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	
	BR 1.02.001/60/20		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	
4	WB 800 4530	Bronze bushing	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	-	
	WB 800 4030		-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	-	
	WB 800 3530		-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	-	
	WB 800 3030		-	-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	-	
	WB 800 2530		-	-	-	-	2	-	-	-	-	2	-	-	-	-	-	-	-	-	
	WB 800 2020		-	-	-	-	-	2	-	-	-	-	2	-	-	-	-	-	2	-	
	BR 1.02.002/60/45		-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	-	
	BR 1.02.002/60/40		-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	-	
	BR 1.02.002/60/35		-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	-	
	BR 1.02.002/60/30		-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	-	
	BR 1.02.002/60/25		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2	-	-	
5	BR 1.003	Washer	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
6	BR 1.003 P	Washer	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	Only for GR 30
7	M24x1.5	Nut	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
8	MC6S 12.9 M16x20	Screw	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
9	1.2.C6	Grease nipple	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	